


# CG Datasheet

POSITIONING LASER GREEN CROSS

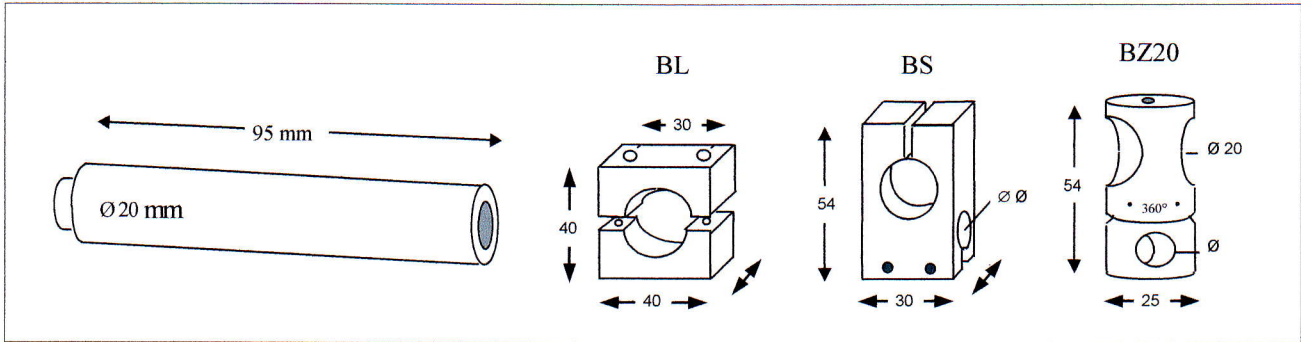

## CG APPLICATION

<b>Description</b>	Green laser with crosshair optics, Type 24V with variable input between 12 and 30 V / DC.
<b>Industry</b>	Textiles, Tires, Wood, Machine Construction, etc.
<b>Machines</b>	Sewing machines, Vulcanizing machines, Saws, etc.
<b>Environment</b>	in illuminated areas or rooms, without direct sunlight.

## AVAILABLE MODELS & SPECIFICATIONS


Reference	Wave-length	Power	Line distance
LT 532/5/CG	532 nm	5 mW	0.3 - 3 m
LT 532/10/CG	532 nm	10 mW	0.3 - 4 m
LT 532/5/24V/CG	532 nm	5 mW	0.3 - 3 m
LT 532/10/24V/CG	532 nm	10 mW	0.3 - 4 m

## ACCESSORIES

<b>Holders:</b>	BL	BS	BZ
<b>Power supply:</b>	230 VAC net cable	for 2 Lasers LDSE 10/2 Rail Transformer	for 5 Lasers LDSE 10/5 Rail Transformer
<b>Optic:</b>	25, 45 or 90° Cross Optic		

## TECHNICAL DATA

Lifetime.....	+/- 10,000 Hours
Wavelength.....	532 nm
Power .....	5/10 mW
Weight .....	0.2 kg
Input .....	3 V / 12 - 30 V/DC
Isolation Class.....	IP 64
Laser Class.....	2
Work temperature.....	- 10 - + 40° C
Stock temperature.....	- 20 - + 60° C
Air moisture .....	0 - 85 %
Power Consumption:...	2.0 W
Warranty.....	24 months

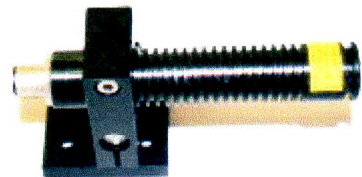

IG-Lasertechnik  
 Industriestraße 7  
 D- 53909 Zülpich  
 Tel. +49(0)2252-8360190  
 Fax. +49(0)2252-8360191  
 DE 195 533 141  
 info@igl.com.de  
 www.igl.com.de