


# GF Datasheet

POSITIONING LASER GREEN Ø 20 MM

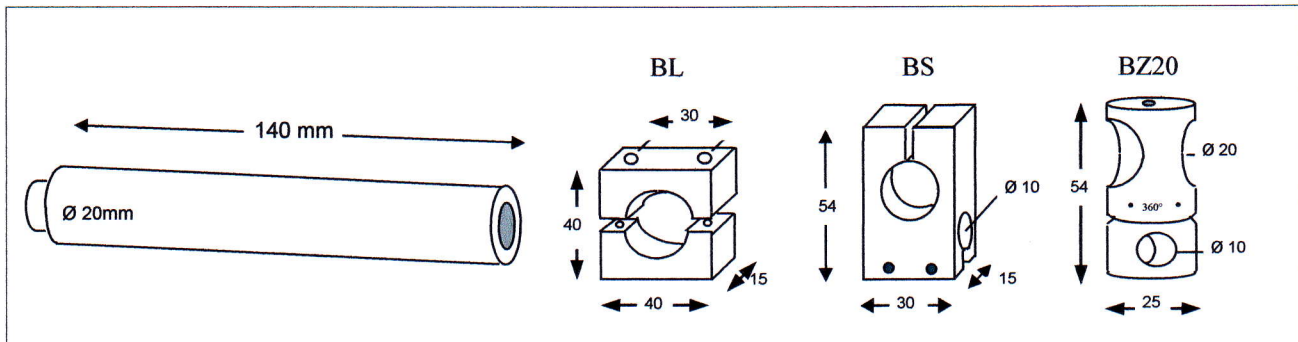

## GF APPLICATION

<p>Description</p> <p>Industry</p> <p>Machines</p> <p>Environment</p>	<p>Green laser with free focusable dot optic. Ideal for set-ups that require adjustable distances to the work surface.</p> <p>Industrial edition with net cable and variable input between 12 and 30 VDC.</p> <p>Textile industry, wooden industry, metal industry, mechanical engineering</p> <p>Textile carousel, knothole drills, CNC, drills etc.</p> <p>in illuminated halls or rooms, from 5 mW with sunlight.</p>
-----------------------------------------------------------------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

## AVAILABLE MODELS & SPECIFICATIONS

Reference	Wave-length	Power	Operation distance
LT532/1/GF	532 nm	< 1 mW	to 10 m
LT532/5/GF	532 nm	< 5 mW	to 10 m

## ACCESSORIES

<p>Holders:</p> <p>Power supply:</p> <p>Battery Pack:</p> <p>Optic:</p>	<p>BK</p> <p>100-230 VAC</p> <p>3,0 V</p> <p>focusable point-optic</p>	<p>BL</p> <p>for 2 Lasers LDSE 10/2</p> <p>Rail Transformer</p> <p>Accu-pack with charger</p>	<p>BS</p> <p>for 5 Lasers LDSE 10/5</p> <p>Rail Transformer</p>	<p>BZ20</p> <p>for 5 Lasers LDSE 10/5</p> <p>Rail Transformer</p>	<p>BLG</p>
-------------------------------------------------------------------------	------------------------------------------------------------------------	-----------------------------------------------------------------------------------------------	-----------------------------------------------------------------	-------------------------------------------------------------------	------------

## TECHNICAL DATA

Lifetime.....	+ / - 20.000 Hours
Wavelength.....	532 nm
Power .....	1-5 mW
Weight .....	0.3 kg
Input .....	3 V/DC
	12 - 30 V/DC
Isolation Class.....	IP 64
Laser Class.....	2 / 3R
Work temperature. ....	- 5 - + 40° C
Stock temperature. ....	- 10 - + 60° C
Air moisture .....	0 - 85 %
Power Consumption:...	1.5 W
Warranty.....	24 months



IG-Lasertechnik  
 Industriestraße 7  
 D- 53909 Zülpich  
 Tel. +49(0)2252-8360190  
 Fax. +49(0)2252-8360191  
 DE 195 533 141  
 info@igl.com.de  
 www.igl.com.de