


ML-C Datasheet

POSITIONING LASER **RED** CROSS

Page 1

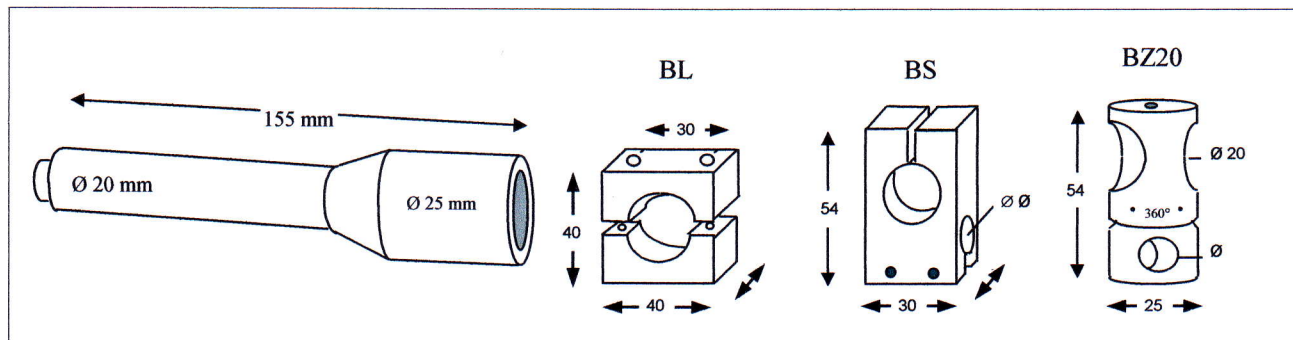

ML-C APPLICATION

Description	Adjustable cross optic, industrial edition with net cable and variable input between 12 and 30 V / DC.
Industry	Textiles, Tires, Wood, Machine Construction, etc.
Machines	Sewing machines, Vulcanizing machines, Saws, etc.
Environment	in illuminated areas or rooms, without direct sunlight.

AVAILABLE MODELS & SPECIFICATIONS

Reference	Wave-length	Power	Line distance
LT 650/1/ML-C	650 nm	1 mW	> 0.5 m
LT 635/1/ML-C	635 nm	1 mW	> 0.5 m
LT 670/5/ML-C	670 nm	5 mW	> 0.5 m
LT 650/5/ML-C	650 nm	5 mW	> 0.5 m
LT 635/5/ML-C	635 nm	5 mW	> 0.5 m

ACCESSORIES

Holders:	BL	BS	BZ
Power supply:	230 VAC net cable	for 2 Lasers LDSE 10/2 Rail Transformer	for 5 Lasers LDSE 10/5 Rail Transformer
Optic:	Cross Optic		

TECHNICAL DATA

Lifetime.....	+/- 30,000 Hours
Wavelength.....	635 - 650 - 670nm
Power.....	1/ 5mW
Weight.....	0.2 kg
Input	12 - 30 V/DC
Isolation Class.....	IP 64
Laser Class.....	2
Work temperature.....	- 15 - + 50° C
Stock temperature.....	- 40 - + 60° C
Air moisture	0 - 85 %
Power Consumption:...	1.0 W
Warranty.....	24 months




IG-Lasertechnik
Industriestraße 7
D- 53909 Zülrich
Tel. +49(0)2252-8360190
Fax. +49(0)2252-8360191
DE 195 533 141
info@igl.com.de
www.igl.com.de

ML-C Datasheet

POSITIONING LASER RED CROSS

Page 2

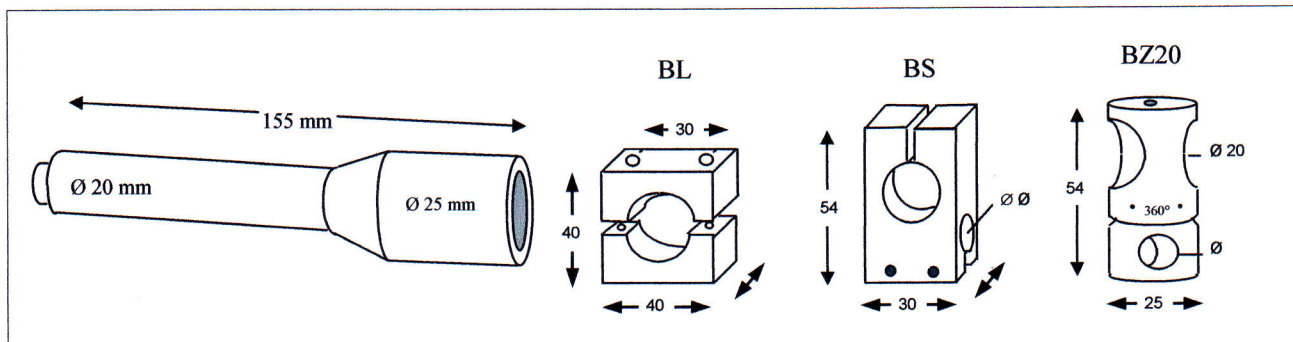

ML-C APPLICATION

Description	Adjustable cross optic, industrial edition with net cable and variable input between 12 and 30 V / DC.
Industry	Textiles, Tires, Wood, Machine Construction, etc.
Machines	Sewing machines, Vulcanizing machines, Saws, etc.
Environment	in illuminated areas or rooms, without direct sunlight.

AVAILABLE MODELS & SPECIFICATIONS

Reference	Wave-length	Power	Line distance
LT 635/10/ML-C	635 nm	10 mW	0.3 - 1.0 m
LT 635/15/ML-C	635 nm	15 mW	0.5 - 3.0 m
LT 650/20/ML-C	650 nm	20 mW	0.5 - 3.0 m
LT 650/30/ML-C	650 nm	30 mW	1.0 - 5.0 m

ACCESSORIES

Holders:	BL	BS	BZ
Power supply:	100-230 VAC net cable	for 2 Lasers LDSE 10/2 Rail Transformer	for 5 Lasers LDSE 10/5 Rail Transformer

TECHNICAL DATA

Lifetime.....	+/- 30,000 Hours
Wavelength.....	635 - 650 nm
Power	10 / 15 / 20 / 30 mW
Weight	0.2 kg
Input	12 - 30 V/DC
Isolation Class.....	IP 64
Laser Class.....	2 / 2M
Work temperature.....	- 15 - + 50° C
Stock temperature.....	- 40 - + 60° C
Air moisture	0 - 85 %
Power Consumption:...	1.5 W
Warranty.....	24 months



IG-Lasertechnik
Industriestraße 7
D- 53909 Zülrich
Tel. +49(0)2252-8360190
Fax. +49(0)2252-8360191
DE 195 533 141
info@igl.com.de
www.igl.com.de