


SG40 Datasheet

POSITIONING LASER GREEN Ø 40 MM

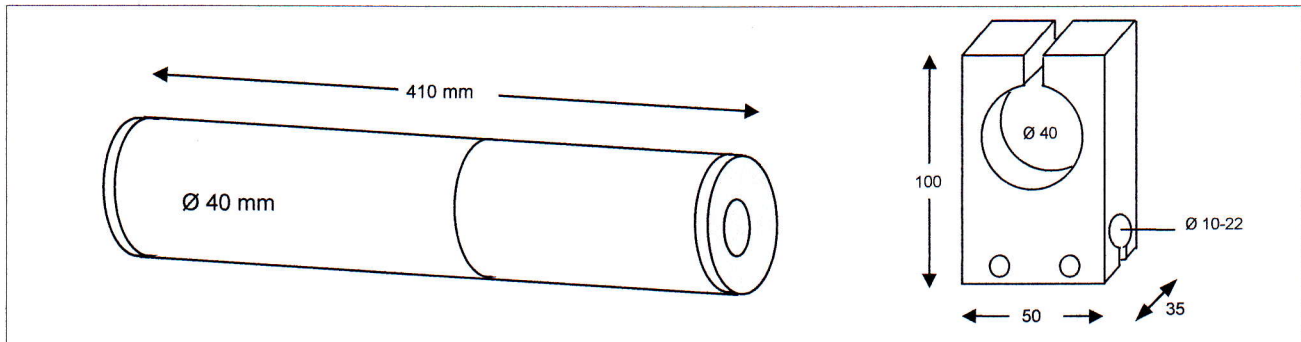

SG40 APPLICATION

Description

Green laser diode offers the same power with significantly better visibility than a red laser.

Industry

Textiles, Wood, Stone, Machine construction, etc.

Machines

Sawing operations for Stone, Wood, etc.

Environment

Suited to open areas, even with direct sunlight.

AVAILABLE MODELS & SPECIFICATIONS

Reference	Wave-length	Power	Line distance
SG40/20	532 nm	20 mW	5 - 7 m
SG40/30	532 nm	30 mW	6 - 9 m
SG40/40	532 nm	40 mW	8 - 12 m
SG40/50	532 nm	50 mW	10 - 15 m


ACCESSORIES

Holders: BZ40

Optic: Point-optic Powerline Angle-optic 90°

TECHNICAL DATA

Lifetime.....+/- 20,000 Hours
Wavelength.....532 nm
Power20 - 50 mW
Weight1,5 kg
Input85 - 230 V/AC
 12 - 30V / DC
Isolation Class.....IP 64
Laser Class.....2 / 2M
Work temperature.- 15 - + 40° C
Stock temperature.....- 40 - + 60° C
Air moisture0 - 85 %
Power Consumption:.... 3,0 W
Warranty.....24 months.

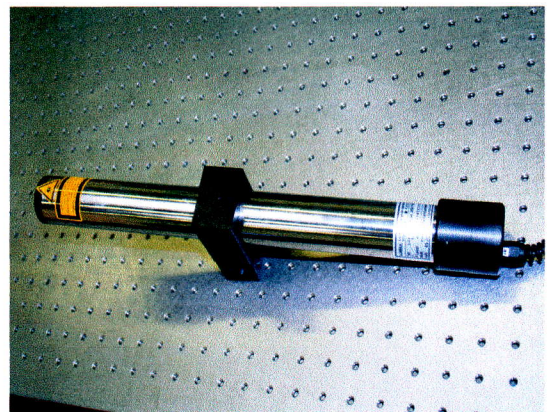

IG-Lasertechnik
Industriestraße 7
D- 53909 Zülrich
Tel. +49(0)2252-8360190
Fax. +49(0)2252-8360191
DE 195 533 141
info@igl.com.de
www.igl.com.de