

Inductive sensors  
Optical sensors  
Capacitive sensors

# Product range catalog

Sensors – products,  
basic information, applications

**EATON**  
*Powering Business Worldwide*



TM2A Soluções e Componentes Industriais  
Rua Cidade de Viena 2, Parque Ind. Arneiro  
2660-456 São Julião do Tojal  
PORTUGAL  
T: +351 219737330 F: +351 219737339  
www.tm2a.pt info@tm2a.pt






# EAT•N

Powering Business Worldwide

## The power of fusion.

WWW.TM2A.PT info@tm2a.pt

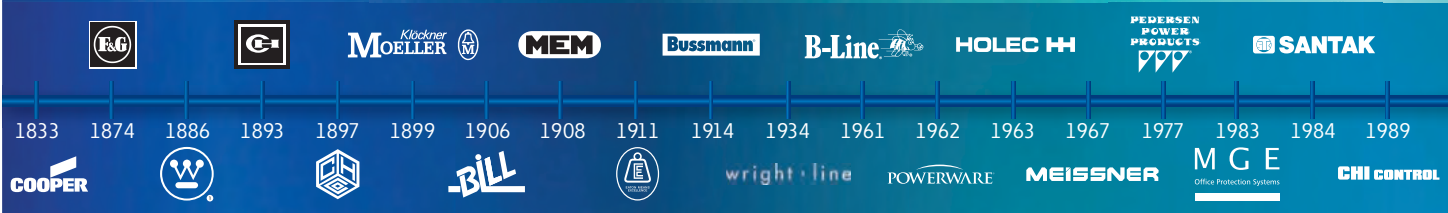

# EAT•N

Powering Business Worldwide

There's a certain energy at Eaton. It's the power of uniting some of the world's most respected names to build a brand you can trust to meet your every power management need.

Eaton is dedicated to ensuring that reliable, efficient and safe power is available when it's needed most. Building on over 100 years of experience in electrical power management, the experts at Eaton deliver customized, integrated solutions to solve your most critical challenges. To learn more visit [www.eaton.eu/electrical](http://www.eaton.eu/electrical).

All of the above are trademarks of Eaton or its affiliates. •Eaton has a license to use the Westinghouse brand name in Asia Pacific. ©2013 Eaton.

## Inductive Sensors

|  |    |
|--|----|
| <b>E52 Cube Series</b>                 |    |
| Description                            | 8  |
| Ordering/Engineering/Dimensions        | 9  |
| Technical data                         | 10 |
| <b>E55 Limited Switch Style Series</b> |    |
| Description                            | 11 |
| Ordering                               | 12 |
| Technical data                         | 13 |
| Engineering/Dimensions                 | 14 |
| <b>E56 Pancake Series</b>              |    |
| Description                            | 15 |
| Ordering/Engineering/Dimensions        | 16 |
| Technical data                         | 17 |
| <b>E57 Global Series</b>               |    |
| Description                            | 18 |
| Ordering                               | 19 |
| Engineering                            | 23 |
| Technical data                         | 24 |
| Dimensions                             | 26 |
| <b>E57 Premium+ Short Series</b>       |    |
| Description                            | 28 |
| Ordering                               | 29 |
| Engineering                            | 35 |
| Technical data                         | 36 |
| Dimensions                             | 37 |
| <b>E57 Miniatur Series</b>             |    |
| Description                            | 39 |
| Ordering/Technical data                | 40 |
| Engineering/Dimensions                 | 41 |
| <b>iProx Series</b>                    |    |
| Description                            | 42 |
| Ordering                               | 43 |
| Technical data/Engineering/Dimensions  | 44 |
| <b>E59 AccuProx Series</b>             |    |
| Description                            | 45 |
| Ordering                               | 47 |
| Engineering                            | 48 |
| Technical data                         | 49 |
| Dimensions                             | 49 |

## Optical sensors

|                                   |    |
|-----------------------------------|----|
| <b>Comet Series</b>               |    |
| Description Comet-Serie           | 50 |
| Ordering Comet-Serie              | 51 |
| Description FO cable              | 56 |
| Ordering FO cable                 | 57 |
| Engineering                       | 59 |
| Technical data                    | 61 |
| Dimensions                        | 62 |
| <b>E58 Harsh Duty Series</b>      |    |
| Description                       | 66 |
| Ordering                          | 67 |
| Engineering                       | 68 |
| Dimensions/Technical data         | 69 |
| <b>E65 SM Series</b>              |    |
| Description                       | 70 |
| Ordering                          | 71 |
| Technical data                    | 72 |
| Engineering/Dimensions            | 73 |
| <b>E67 Long Range Series</b>      |    |
| Description                       | 74 |
| Ordering/Dimensions               | 75 |
| Engineering/Technical data        | 76 |
| <b>E71 NanoView Series</b>        |    |
| Description                       | 77 |
| Ordering                          | 78 |
| Engineering                       | 79 |
| Technical data/Dimensions         | 80 |
| <b>E75/E76 IntelliView Series</b> |    |
| Description                       | 81 |
| Ordering                          | 84 |
| Engineering                       | 85 |
| Technical data                    | 87 |
| Dimensions                        | 88 |

## Capacitive sensors

|                              |    |
|------------------------------|----|
| <b>E53 Capacitive Series</b> |    |
| Description                  | 89 |
| Ordering                     | 90 |
| Engineering                  | 93 |
| Technical data               | 93 |
| Dimensions                   | 94 |

## Accessories

|            |     |
|------------|-----|
| Ordering   | 95  |
| Dimensions | 100 |

**Basic information** 103

**Applications** 113

**Appendix** 116



# Energizing a world that demands more.

Discover today's Eaton.

## Powering business worldwide

As a global diversified power management company, we help customers worldwide manage the power needed for buildings, aircraft, trucks, cars, machinery and businesses.

Eaton's innovative technologies help customers manage electrical, hydraulic and mechanical power more reliably, efficiently, safely and sustainably.



*Powering Business Worldwide*

WWW.TMZA.PT

WWW.TMZA.PT

info@tm2a.pt



## We deliver:

- **Electrical solutions** that use less energy, improve power reliability and make the places we live and work safer and more comfortable
- **Hydraulic and electrical solutions** that enable machines to deliver more productivity without wasting power
- **Aerospace solutions** that make aircraft lighter, safer and less costly to operate, and help airports operate more efficiently
- **Vehicle drivetrain and powertrain solutions** that deliver more power to cars, trucks and buses, while reducing fuel consumption and emissions

We provide integrated solutions that help make energy, in all its forms, more practical and accessible.

With 2012 sales of \$16.3 billion, Eaton has approximately 103,000 employees around the world and sells products in more than 175 countries.



## Eaton's electrical business

### Eaton is a global leader with expertise in:

- Power distribution and circuit protection
- Backup power protection
- Solutions for harsh and hazardous environments
- Lighting and security
- Structural solutions and wiring devices
- Control and automation
- Engineering services

Eaton is positioned through its global solutions to answer today's most critical electrical power management challenges. With 100 years of electrical experience behind us, we're energized by the challenge of powering up a world that demands twice as much energy as today. We're anticipating needs, engineering products, and creating solutions to energize our markets today and in the future.

We are dedicated to ensuring that reliable, efficient and safe power is available when it's needed most.

[www.eaton.eu](http://www.eaton.eu)



# Eaton Catalogs in the App Store – all catalogs close at hand!

In order to meet the needs of increasingly mobile customers and employees, Eaton is offering a mobile solution for communication and product information.

## Clearly designed shelf view

The Eaton Catalogs app offers an outstandingly clear user interface and several fully developed functions. In the form of a shelf view, the user is provided with a clear overview of Eaton's latest product catalogs. These can be leafed through on the fly or downloaded to the device – for situations when there is no Internet access. Choose for yourself which catalogs are of interest and keep up-to-date using the Update function.

## Intuitive browsing, searching and finding

Users can simply browse through the catalogs with intuitive navigation ensured. A linked table of contents, thumbnail views and a rapid search function are also provided for finding information quickly and conveniently.

## Linked data sheets

It is often the case that product information is required which is not available in the product catalogs. The "Eaton Catalogs" contain article numbers and type designations that are linked to the Online Catalog. This enables the user to access highly detailed production information in the form of a technical data sheet. From here other documents such as installation instructions and technical publications can be called up.

Whether on the building site, at the customer, on the train or at home – "Eaton Catalogs" make sure that all product information is close at hand.



# Eaton Online Catalog – find product details quickly and efficiently!

You can find comprehensive up-to-date product information at <http://ecat.moeller.net>

## Lookup

You can search by keywords, product names, article numbers, technical data: The search understands everything and takes you straight to the product you're looking for.

## Graphical navigation

Graphical representation of the fields of application and product groups.

## Selection aids

Tailored to the typical expert's approach, this search aid helps you quickly find the product you need.

## Data sheets

For every article the catalog can generate a technical data sheet, which you can convert to a PDF file for printing or saving with a single click.

## Parts lists

From your search results you can create a parts list that you can then send to your Eaton sales partner as a query.

You can find comprehensive up-to-date information about Eaton's automation products and switchgear in our Online Catalog.



HTML data sheet; can be saved as PDF file.

| Item | Qty | Photo | A/ECHP no. | Part no.                        | Short text                             |
|------|-----|-------|------------|---------------------------------|--|
| 1    | 1   |       | 111017     | ES4P201-DMD01                   | Safety control relay 24 V DC class     |
| 2    | 1   |       | 228758     | FAK-COMBINATION                 | Complete unit                          |
| 3    | 1   |       | 284831     | M25-DOLM-GR-X1/0                | Double act. alum. flat off-button ext. |
| 4    | 1   |       | 350090     | CRJH 15-41 (110V50Hz, 120V60Hz) | Contactor 7.5kV/400V AC-operated       |
| 5    | 1   |       | 138516     | PKZ65KTD-65                     | PROZ65 = trip block Standard 6-85A     |

Parts list, e.g. for queries to Eaton Sales.




WWW.TM2A.PT info@tm2a.pt

# Sensors optimized for OEM applications

Machine builders need robust, reliable, and cost-effective sensors for a variety of challenging applications.

To meet those Eaton is your global partner.

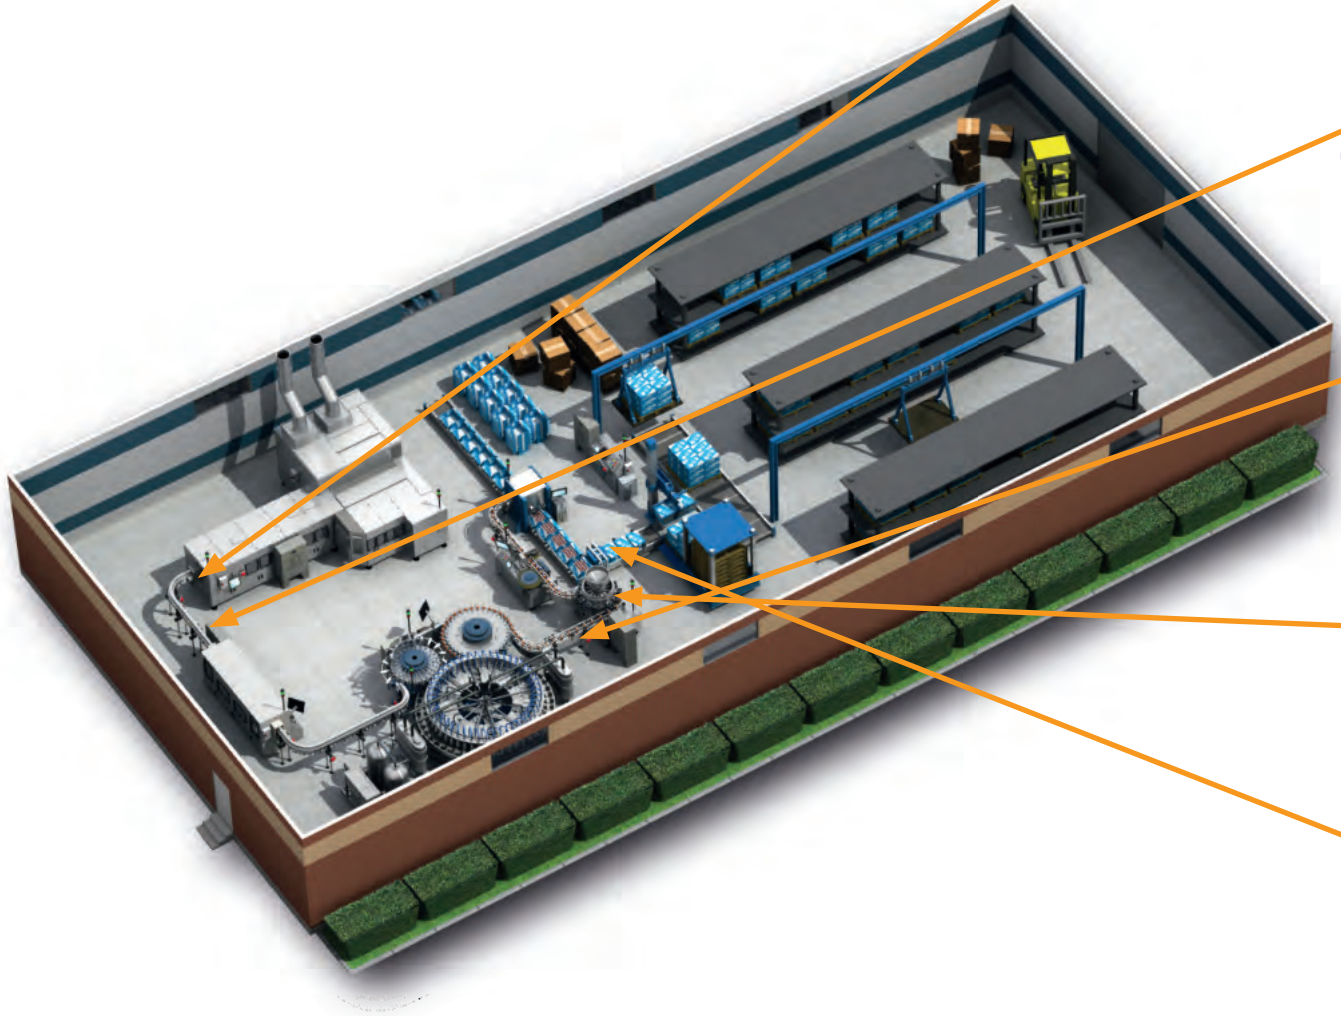

WWW.TM2A.PT info@tm2a.pt





## Molding

Injection blow molding machines transform raw plastic into molded bottles. These machines heat the plastic, inject it into a cavity, and expand the plastic to its final shape. Capacitive sensors and photoelectric sensors can be used to detect the level of plastic pellets in the input hopper; to verify tooling positions and count parts coming out of the molds; and can be used after the operation to verify correct bottle volume and dimensions at much lower cost and complexity than vision-based systems.



## Transporting

Air transport moves product from one station to the next at incredible speed, all while a vacuum seal on open containers keeps bottles contaminant-free. Along the line, specialized photoelectric sensors with an ability to detect clear objects can be used to count bottles as they fly by, also looking for unusual gaps between adjacent products that might indicate a missing or dropped product.



## Filling

Photoelectric sensors can be used to detect both bottle and filler positions and capacitive sensors or specialized photoelectric sensors can be used to confirm correct fluid fill levels.



## Capping

As the filled bottles are moved to the capping machine, photoelectric sensors detect bottle position, and capacitive sensors can be used to confirm correct fluid fill levels. Depending on the type of cap, photoelectric and/or inductive sensors can be used to inspect for correct cap placement and tightening. Once capped, the bottles are wrapped in a plastic seal that contains special UV dyes. As the bottles leave the machine, specialized UV-sensitive photoelectric sensors can be used to confirm the presence of the safety seal around the cap.




## Packing

Bottles are batched into groupings of twelve, and moved over a cardboard box blank. The side of the cardboard is then folded up, around the product, to form the final product box. Photoelectric sensors can be used at this stage to count bottles during the batching process, to ensure that the cardboard box blank is present, and to verify the position of the batch as it is moved into place for the packing step. Sensors can also be used to verify that box sides have been folded up to the correct height, and to count finished packages moving on to a palletizer or a finished goods station.

info@tm2a.pt

WWW.TM2A.PT

## Description

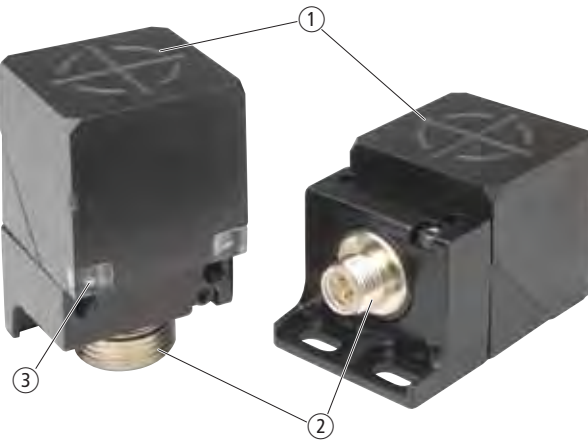

- ① Adjustable Sensing Head for Top- and Side-Sensing.
- ② Plug connector M12.
- ③ Two LED status indications.

### Short Description

Sensor E52 Cube from Eaton is a powerful inductive proximity sensor. It provides a long sensing range in a compact, standard-conformant enclosure. The outputs of this series are self-configuring as PNP or NPN, without user interaction. The E52 features additional outputs for various connection types to cover many applications with just a few models. Separate indicator lights for voltage and output signal simplify installation and fault retrieval. Five different mounting methods make these sensors exceptionally versatile. The E52 Cube has been developed specially for demanding applications, for example in car production, in bulk material plants and in metal-processing industries.

### Product Features


- Large measuring range up to 40 mm.
- Four-wire models feature additional outputs (1 × N/C, 1 × N/O).
- Four-wire DC models feature an automatic configuration function for independent NPN/PNP selection.
- Robust design featuring vibration and impact-absorbing potting compound
- Ideal for extreme temperatures or high pressure washdown environments.

### Approvals






Ordering

|   | Rated operational voltage<br>$U_e$ | Rated switching distance<br>$S_n$<br>mm | Type of mounting | Switching type | For connection of:            | Contact configuration<br>N/O = normally open contact<br>N/C = normally closed contact | Material                | Part no.<br>Article no.         | Price<br>see price list | Std. pack |
|---|------------------------------------|---|------------------|----------------|-------------------------------|---|-------------------------|---------------------------------|-------------------------|-----------|
| <b>E52-Serie</b>  |                                    |   |                  |                |                               |   |                         |                                 |                         |           |
| 4-wire<br>40 x 40 x 40 mm   |                                    |   |                  |                |                               |   |                         |                                 |                         |           |
|  | 10 – 48 V DC                       | 15                                      | Flush            | NPN<br>PNP     | Plug-in connection<br>M12 x 1 | 1 NC/1 N/O  | Zinc/Insulated material | <b>E520-DL15SAD01</b><br>135804 |                         | 1 off     |
|   |                                    | 15                                      | Non-flush        |                |                               |   |                         | <b>E520-DL15UAD01</b><br>135805 |                         |           |
|   |                                    | 20                                      | Flush            |                |                               |   |                         | <b>E520-DL20SAD01</b><br>135806 |                         |           |
|   |                                    | 20                                      | Non-flush        |                |                               |   |                         | <b>E520-DL20UAD01</b><br>135807 |                         |           |
|   |                                    | 25                                      | Non-flush        |                |                               |   |                         | <b>E520-DL25UAD01</b><br>135808 |                         |           |
|   |                                    | 30                                      | Non-flush        |                |                               |   |                         | <b>E520-DL30UAD01</b><br>135809 |                         |           |
|   |                                    | 35                                      | Non-flush        |                |                               |   |                         | <b>E520-DL35UAD01</b><br>135810 |                         |           |
|   |                                    | 40                                      | Non-flush        |                |                               |   |                         | <b>E520-DL40UAD01</b><br>135811 |                         |           |


Information relevant for export to North America

|   |                      |  |
|---|----------------------|--|
|  | Product Standards    | UL 508; CSA-C22.2 No. 14; IEC60947-5-2; CE marking |
|   | UL File No.          | E166051  |
|   | UL CCN               | NRKH, NRKH7  |
|   | CSA File No.         | UL report applies to both Canada and US            |
|   | CSA Class No.        | -  |
|   | NA Certification     | UL listed, certified by UL for use in Canada       |
|   | Max. Voltage Rating  | 48 V DC  |
|   | Degree of Protection | IEC: IP68; UL Type 4, 4X, 6, 6P, 12, 13            |

Engineering


Circuit diagrams

E52...



Through autoconfiguration connectable to both +V or (-).

Dimensions

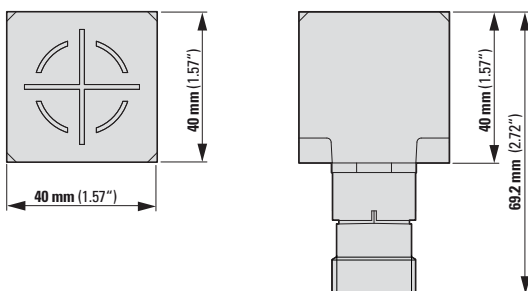

WWW.TM2A.PT info@tm2a.pt


WWW.TM2A.PT info@tm2a.pt

## Technical data

|  |       |       | E52-Serie  |
|--|-------|-------|--|
| <b>General</b>   |       |       |  |
| Standards  |       |       | IEC/EN 60947-5-2   |
| Ambient temperature  |       | °C    | - 40 - + 70  |
| Protection type  |       |       | IP67   |
| Mechanical shock resistance  |       | g     | 30<br>Shock duration 11 ms   |
| <b>Characteristics</b>   |       |       |  |
| Repetition accuracy of $S_n$   |       | %     | 2  |
| Temperature drift of $S_n$   |       | %     | 10   |
| Switching hysteresis of $S_n$  |       | %     | 15   |
| Rated operational voltage  |       | $U_e$ | 10 – 48 V DC   |
| Operating current in the switched state at 24 V DC                             | $I_b$ | mA    | 25   |
| Maximum load current   | $I_e$ | mA    | 300  |
| Voltage drop at $I_e$  | $U_d$ | V     | 2.5  |
| Switching Frequency  |       | Hz    | 100  |
| Residual current through the load in the blocked state at 230 V AC and 24 V DC | $I_r$ | mA    | 0.15   |
| Switching state display  |       | LED   | Red  |
| Operating voltage display  |       | LED   | Green  |
| Protective functions   |       |       | Short-circuit protective device<br>Protection against polarity reversal<br>Protection against wire breakage                      |
| Connection   |       |       | 4-wire   |
| Design (outer dimensions)  |       | mm    | 40 x 40 x 40   |
| For connection of:   |       |       | Plug-in connection M12 x 1   |
| Material   |       |       | Zinc/Insulated material  |
| Surface  |       |       | Zinc alloy   |
| <b>Notes</b>   |       |       | Further technical data can be found in the Online Catalog at <a href="http://de.ecat.moeller.net">http://de.ecat.moeller.net</a> |



**Description**

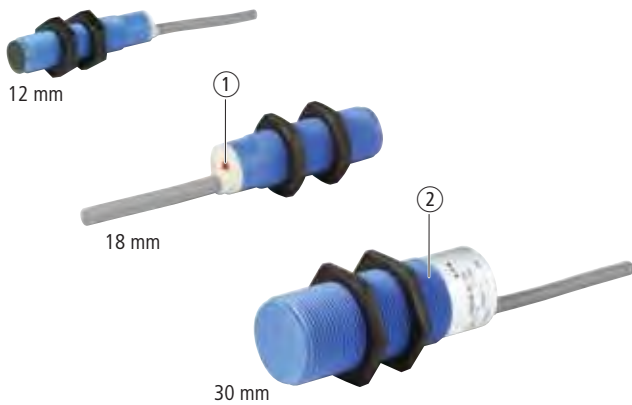

- ① LED for output status.
- ② Corrosion-resistant PBT Housing



- ① Sensor head fitted for lateral detection. Can be rotated 90°.
- ② Non-metal housing is corrosion-resistant.

**Short Description**

**Cylinder design**

Tubular Inductive Proximity Sensors by Eaton's electrical business are constructed of corrosion-resistant PBT insulated material. They are ideally suited for wash down applications such as those found in food processing plants. They are available in 12 mm, 18 mm and 30 mm diameters. Screened sensors can be embedded in metallic surfaces.

**Product Features**

**Cylinder design**

- Versions for 2-conductor AC voltage or 3-conductor DC voltage.
- Threaded tubular housings in three diameters allow easy integration into new and existing applications
- Nonmetallic construction offers excellent resistance to corrosion
- All models feature an output signal indicator light.

**Approvals**



**Short Description**

**Rectangular design**

These sensors from Eaton's electrical business feature PBT resin housings for high resistance to corrosion. The housing is sized to offer a direct replacement for standard limit switches. The unique sensing head is factory assembled for top sensing, but can be easily converted in the field to any one of four side sensing positions. Models are available with sensing ranges from 15 mm to 40 mm. The sensors can be wired for N/O or N/C operation.







**Product Features**

**Rectangular design**

- Nonmetallic housing offers excellent resistance to corrosion.
- Same form factor and design as standard limit switches for easy retrofit.
- Sensor head features five sensing positions (top and all four sides) that can be easily changed in the field.
- Long sensing ranges up to 40 mm.

**Approvals**



| Design (outer dimensions)<br>mm   | Rated operational voltage<br>U <sub>e</sub> | Rated switching distance<br>S <sub>n</sub><br>mm | Type of mounting     | Switching type       | Contact configuration<br>N/O = normally open contact<br>N/C = normally closed contact | Part no.             | Article no.          | Price see price list | Std. pack |       |
|---|---|--|----------------------|----------------------|---|----------------------|----------------------|----------------------|-----------|-------|
| <b>E55-Serie</b>  |   |  |                      |                      |   |                      |                      |                      |           |       |
| 2-wire<br>2 m connection cable<br>Insulated material                                |   |  |                      |                      |   |                      |                      |                      |           |       |
|    | M12 x 1                                     | 20 - 250 V AC                                    | 2                    | Flush                | -   | 1 N/O                | <b>E55CAL12A2</b>    | 135816               | 1 off     |       |
|   |   |  |                      |                      | -   | 1 NC                 | <b>E55CBL12A2</b>    | 135834               |           |       |
|   |   |  | 4                    | Non-flush            | -   | 1 N/O                | <b>E55CAL12A2E</b>   | 135817               |           |       |
|   |   |  |                      |                      | -   | 1 NC                 | <b>E55CBL12A2E</b>   | 135835               |           |       |
|    | M18 x 1                                     | 20 - 250 V AC                                    | 5                    | Flush                | -   | 1 N/O                | <b>E55CAL18A2</b>    | 135822               |           |       |
|   |   |  |                      |                      | -   | 1 NC                 | <b>E55CBL18A2</b>    | 135839               |           |       |
|   |   |  | 8                    | Non-flush            | -   | 1 N/O                | <b>E55CAL18A2E</b>   | 135823               |           |       |
|   |   |  |                      |                      | -   | 1 NC                 | <b>E55CBL18A2E</b>   | 135840               |           |       |
|    | M30 x 1.5                                   | 20 - 250 V AC                                    | 10                   | Flush                | -   | 1 N/O                | <b>E55CAL30A2</b>    | 135828               |           |       |
|   |   |  |                      |                      | -   | 1 NC                 | <b>E55CBL30A2</b>    | 135844               |           |       |
|   |   |  | 15                   | Non-flush            | -   | 1 N/O                | <b>E55CAL30A2E</b>   | 135829               |           |       |
|   |   |  |                      |                      | -   | 1 NC                 | <b>E55CBL30A2E</b>   | 135845               |           |       |
| 3-wire<br>2 m connection cable<br>Insulated material                                |   |  |                      |                      |   |                      |                      |                      |           |       |
|   | M12 x 1                                     | 10 - 30 V DC                                     | 2                    | Flush                | NPN   | 1 N/O                | <b>E55CAL12T110</b>  | 135818               | 1 off     |       |
|   |   |  |                      |                      | PNP   | 1 N/O                | <b>E55CAL12T111</b>  | 135820               |           |       |
|   |   |  |                      |                      | PNP   | 1 NC                 | <b>E55CBL12T111</b>  | 135837               |           |       |
|   |   |  | 4                    | Non-flush            | NPN   | 1 N/O                | <b>E55CAL12T110E</b> | 135819               |           |       |
|   |   |  |                      |                      | PNP   | 1 N/O                | <b>E55CAL12T111E</b> | 135821               |           |       |
|   |   |  |                      |                      | NPN   | 1 NC                 | <b>E55CBL12T110E</b> | 135836               |           |       |
| PNP   | 1 NC  | <b>E55CBL12T111E</b>                             | 135838               |                      |   |                      |                      |                      |           |       |
|   | 5   | Flush  | NPN                  | 1 N/O                | <b>E55CAL18T110</b>   | 135824               |                      |                      |           |       |
|   |   |  | PNP                  | 1 N/O                | <b>E55CAL18T111</b>   | 135826               |                      |                      |           |       |
| NPN   |   |  | 1 NC                 | <b>E55CBL18T110</b>  | 135841  |                      |                      |                      |           |       |
| 8   | Non-flush                                   | NPN  | 1 N/O                | <b>E55CAL18T110E</b> | 135825  |                      |                      |                      |           |       |
|   |   | PNP  | 1 N/O                | <b>E55CAL18T111E</b> | 135827  |                      |                      |                      |           |       |
|   |   | NPN  | 1 NC                 | <b>E55CBL18T110E</b> | 135842  |                      |                      |                      |           |       |
|   |   | PNP  | 1 NC                 | <b>E55CBL18T111E</b> | 135843  |                      |                      |                      |           |       |
|   |   | M18 x 1  | 10 - 30 V DC         | 5                    | Flush   | NPN                  | 1 N/O                | <b>E55CAL18T110</b>  | 135824    |       |
|   |   |  |                      |                      |   | PNP                  | 1 N/O                | <b>E55CAL18T111</b>  | 135826    |       |
| NPN   | 1 NC  |  |                      |                      |   | <b>E55CBL18T110</b>  | 135841               |                      |           |       |
| 8   | Non-flush                                   |  |                      | NPN                  | 1 N/O   | <b>E55CAL18T110E</b> | 135825               |                      |           |       |
|   |   |  |                      | PNP                  | 1 N/O   | <b>E55CAL18T111E</b> | 135827               |                      |           |       |
|   |   |  |                      | NPN                  | 1 NC  | <b>E55CBL18T110E</b> | 135842               |                      |           |       |
| PNP   | 1 NC  | <b>E55CBL18T111E</b>                             | 135843               |                      |   |                      |                      |                      |           |       |
| 3-wire<br>2 m connection cable<br>Insulated material                                |   |  |                      |                      |   |                      |                      |                      |           |       |
|  | M30 x 1.5                                   | 10 - 30 V DC                                     | 10                   | Flush                | NPN   | 1 N/O                | <b>E55CAL30T110</b>  | 135830               | 1 off     |       |
|   |   |  |                      |                      | PNP   | 1 N/O                | <b>E55CAL30T111</b>  | 135832               |           |       |
|   |   |  |                      |                      | NPN   | 1 NC                 | <b>E55CBL30T110</b>  | 135846               |           |       |
|   |   |  |                      |                      | PNP   | 1 NC                 | <b>E55CBL30T111</b>  | 135848               |           |       |
|   |   |  | 15                   | Non-flush            | NPN   | 1 N/O                | <b>E55CAL30T110E</b> | 135831               |           |       |
|   |   |  |                      |                      | PNP   | 1 N/O                | <b>E55CAL30T111E</b> | 135833               |           |       |
| NPN   | 1 NC  | <b>E55CBL30T110E</b>                             | 135847               |                      |   |                      |                      |                      |           |       |
|   | PNP   | 1 NC   | <b>E55CBL30T111E</b> | 135849               |   |                      |                      |                      |           |       |
| 2-wire<br>Screw terminal<br>Insulated material                                      |   |  |                      |                      |   |                      |                      |                      |           |       |
|  | 40 x 40 x 118                               | 35 - 250 V AC                                    | 15                   | Flush                | -   | 1 P                  | <b>E55BLT1C</b>      | 135812               |           | 1 off |
|   |   |  | 20                   | Non-flush            | -   | 1 P                  | <b>E55BLT1D</b>      | 135813               |           |       |
|   |   |  | 30                   |                      | -   | 1 P                  | <b>E55BLT1E</b>      | 135814               |           |       |
|   |   |  | 40                   |                      | -   | 1 P                  | <b>E55BLT1F</b>      | 135815               |           |       |

WWW.TM2A.PT info@tm2a.pt

WWW.TM2A.PT info@tm2a.pt



## Technical data

|                               |          | E55C...L12A                | E55C...L18A   | E55C...L30A   | E55C...L12T<br>E55C...L12T...E  |
|-------------------------------|----------|----------------------------|---------------|---------------|---|
| <b>General</b>                |          |                            |               |               |   |
| Standards                     |          | IEC/EN 60947-5-2           |               |               |   |
| Ambient temperature           | °C       | - 25 - + 70                | - 25 - + 70   | - 25 - + 70   | - 25 - + 70   |
| Protection type               |          | IP66                       | IP66          | IP66          | IP66  |
| Mechanical shock resistance   | g        | 30<br>Shock duration 11 ms |               |               |   |
| <b>Characteristics</b>        |          |                            |               |               |   |
| Repetition accuracy of $S_n$  | %        | 10                         | 10            | 10            | 10  |
| Temperature drift of $S_n$    | %        | 10                         | 10            | 10            | 10  |
| Switching hysteresis of $S_n$ | %        | 20                         | 20            | 20            | 20  |
| Rated operational voltage     | $U_e$    | 20 - 250 V AC              | 20 - 250 V AC | 20 - 250 V AC | 10 - 30 V DC  |
| Residual ripple of $U_e$      | %        | 10                         | 10            | 10            | 10  |
| Maximum load current          | $I_e$ mA | 150                        | 150           | 150           | 200   |
| Voltage drop at $I_e$         | $U_d$ V  | 10                         | 10            | 10            | 8   |
| Switching Frequency           | Hz       | 25                         | 25            | 25            | 2000 1000   |
| Switching state display       | LED      | Red                        | Red           | Red           | Red   |
| Protective functions          |          |                            |               |               | Short-circuit protective device<br>Protection against polarity reversal |
| Connection                    |          | 2-wire                     | 2-wire        | 2-wire        | 3-wire  |
| Style                         |          |                            |               |               |   |
| Design (outer dimensions)     | mm       | M12 x 1                    | M18 x 1       | M30 x 1.5     | M12 x 1   |
| For connection of:            |          | 2 m connection cable       |               |               |   |
| Material                      |          | Insulated material         |               |               |   |


|                               |          | E55C...L18T<br>E55C...L18T...E  | E55C...L30T<br>E55C...L30T...E  | E55BLT...                       |
|-------------------------------|----------|---|---|---------------------------------|
| <b>General</b>                |          |   |   |                                 |
| Standards                     |          | IEC/EN 60947-5-2  |   |                                 |
| Ambient temperature           | °C       | - 25 - + 70   | - 25 - + 70   | - 25 - + 70                     |
| Protection type               |          | IP66  | IP66  | IP67                            |
| Mechanical shock resistance   | g        | 30<br>Shock duration 11 ms  |   |                                 |
| <b>Characteristics</b>        |          |   |   |                                 |
| Repetition accuracy of $S_n$  | %        | 10  | 10  | 10                              |
| Temperature drift of $S_n$    | %        | 10  | 10  | 10                              |
| Switching hysteresis of $S_n$ | %        | 20  | 20  | 20                              |
| Rated operational voltage     | $U_e$    | 10 - 30 V DC  | 10 - 30 V DC  | 35 - 250 V AC                   |
| Residual ripple of $U_e$      | %        | 10  | 10  | 10                              |
| Maximum load current          | $I_e$ mA | 200   | 200   | 400                             |
| Voltage drop at $I_e$         | $U_d$ V  | 8   | 8   | 8                               |
| Switching Frequency           | Hz       | 1000 500  | 300 150   | 25                              |
| Switching state display       | LED      | Red   | Red   | Red                             |
| Protective functions          |          | Short-circuit protective device<br>Protection against polarity reversal | Short-circuit protective device<br>Protection against polarity reversal | Short-circuit protective device |
| Connection                    |          | 3-wire  | 3-wire  | 2-wire                          |
| Style                         |          |   |   |                                 |
| Design (outer dimensions)     | mm       | M18 x 1   | M30 x 1.5   | 40 x 40 x 118                   |
| For connection of:            |          | 2 m connection cable  |   | Screw terminal                  |
| Material                      |          | Insulated material  |   | Insulated material              |

## Notes


Further technical data can be found in the Online Catalog at <http://de.ecat.moeller.net>

Engineering


E55CAL...AZ, E55CBL...A2  
E55CAL...A2E, E55CBL...A2E




E55BL...




E55CAL...110, E55CBL...110  
E55CAL...110E, E55CBL...110E



E55BL...



E55CAL...111, E55CBL...111E  
E55CAL...111, E55CBL...111E




Note:


Switches are supplied configured as N/O. Can be built-in changed over to NC.

Dimensions


E55CAL12...  
E55CBL12...

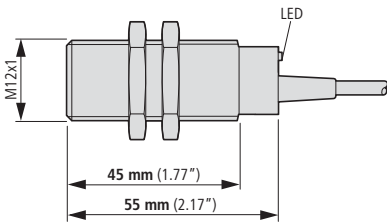


E55BL...

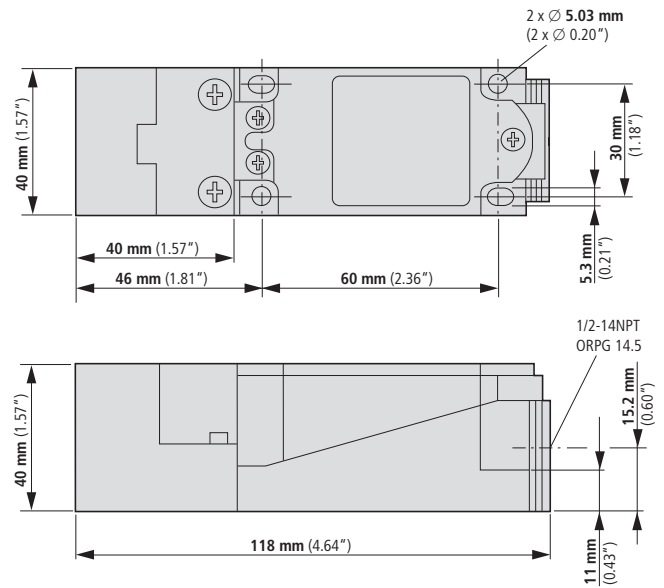

E55CAL18...  
E55CBL18...

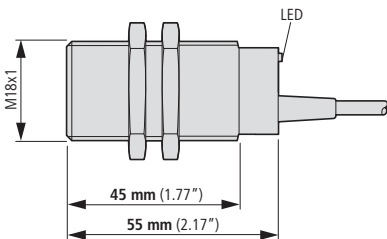

E55CAL30...  
E55CBL30...

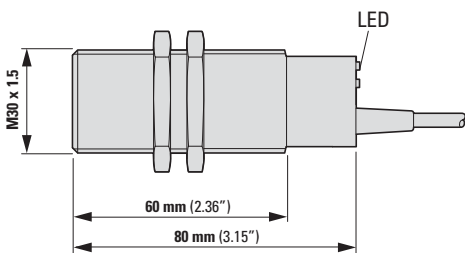

WWW.TM2A.PT info@tm2a.pt

WWW.TM2A.PT info@tm2a.pt



## Description



① Indicator lights for current and output status.

### Short Description

Eaton's E56 sensors are powerful inductive proximity sensors. The E56 Pancake provides greater sensing ranges than other inductive sensor package types. They are easy to wire and feature self-configuring complementary outputs, which automatically detect an NPN or PNP connection and configure the sensor accordingly without user interaction. Indicator lights for power and output state simplify troubleshooting compared to sensors with only an output indicator. These convenience features and their high performance make the E56 Pancake sensors ideal for applications in which a rugged design and a long range are required.



### Product Features

- Large measuring with range up to 100 mm.
- Three sizes for all application scenarios; max. range 50, 70 or 100 mm.
- Complementary outputs (1 × N/C, 1 × N/O) on models with four-wire connection.
- Models with DC voltage four-wire connection feature an automatic configuration function for independent switchover between NPN and PNP.
- Robust design featuring vibration and impact-absorbing potting compound
- Ideal for extreme temperatures or high pressure washdown environments.

### Approvals



Ordering

|   | Con-<br>nection | Design (outer<br>dimensions)<br><br>mm | Rated<br>operational<br>voltage<br><br>U <sub>e</sub> | Rated<br>switching<br>distance<br><br>S <sub>n</sub><br><br>mm | Type<br>of<br>moun-<br>-ting | Switch-<br>-ing<br>type | For<br>connection<br>of:         | Contact configuration<br>N/O = normally open<br>contact<br>N/C = normally closed<br>contact | Part no.<br>Article no.        | Price<br>see<br>price<br>list | Std.<br>pack |
|---|-----------------|--|---|--|------------------------------|-------------------------|----------------------------------|---|--------------------------------|-------------------------------|--------------|
| <b>E56-Serie</b>  |                 |  |   |  |                              |                         |                                  |   |                                |                               |              |
| Insulated material  |                 |  |   |  |                              |                         |                                  |   |                                |                               |              |
|  | 4-wire          | 79 x 79 x 39                           | 10 – 42 V DC  | 40   | Flush                        | NPN<br>PNP              | Plug-in<br>connection<br>M12 x 1 | 1 NC/1 N/O  | <b>E56ADL40SAD01</b><br>136234 |                               | 1 off        |
|   |                 | 79 x 79 x 39                           |   | 40   | Non-<br>flush                | NPN<br>PNP              |                                  | 1 NC/1 N/O  |                                |                               |              |
|  |                 | 109 x 110 x 41                         |   | 70   | Non-<br>flush                | NPN<br>PNP              |                                  | 1 NC/1 N/O  | <b>E56BDL70UAD01</b><br>136236 |                               |              |
|   |                 | 171.5 x 171.5 x 67.4                   |   | 100  | Non-<br>flush                | NPN<br>PNP              |                                  | 1 NC/1 N/O  |                                |                               |              |

Information relevant for export to North America




|                      |   |
|----------------------|---|
| Product Standards    | UL 508; CSA-C22.2 No. 14; IEC60947-5-2; CE marking  |
| UL File No.          | E166051   |
| UL CCN               | NRKH, NRKH7   |
| CSA File No.         | UL report applies to both Canada and US             |
| CSA Class No.        | -   |
| NA Certification     | UL listed, certified by UL for use in Canada        |
| Max. Voltage Rating  | 48 V DC   |
| Degree of Protection | IEC: IP67, IP69K; UL/CSA Type: 4, 4x, 6, 6P, 12, 13 |

Engineering

Circuit diagrams


E56...




Through autoconfiguration connectable to both +V or (-).

Dimensions


E56ADL40...

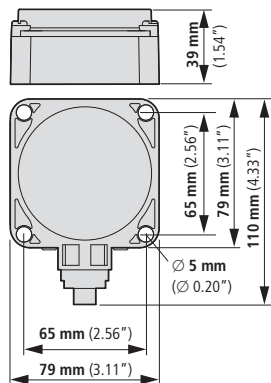

E56BDL70...

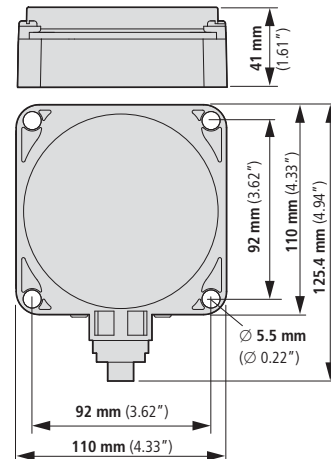

E56CDL100...

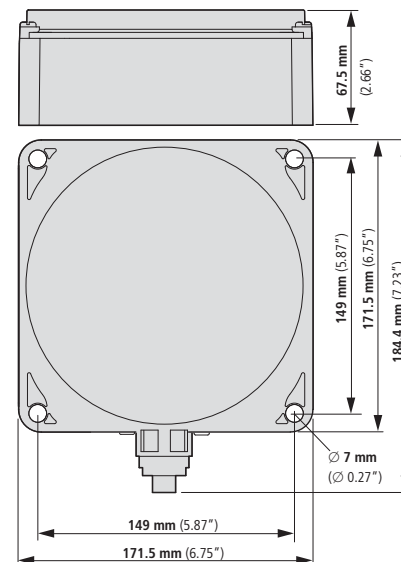

## Technical data

|  |                |                | E56ADL40S   | E56ADL40U          | E56BDL70U          | E56CDL100U           |
|--|----------------|----------------|---|--------------------|--------------------|----------------------|
| <b>General</b>   |                |                |   |                    |                    |                      |
| Standards  |                |                | IEC/EN 60947-5-2  |                    |                    |                      |
| Ambient temperature  |                | °C             | - 25 - + 70   | - 25 - + 70        | - 25 - + 70        | - 25 - + 70          |
| Protection type  |                |                | IP67  | IP67               | IP67               | IP67                 |
| <b>Characteristics</b>   |                |                |   |                    |                    |                      |
| Repetition accuracy of S <sub>n</sub>  |                | %              | 2   | 2                  | 2                  | 2                    |
| Temperature drift of S <sub>n</sub>  |                | %              | 10  | 10                 | 10                 | 10                   |
| Switching hysteresis of S <sub>n</sub>   |                | %              | 15  | 15                 | 15                 | 15                   |
| Rated operational voltage  |                | U <sub>e</sub> | 10 – 42 V DC  |                    |                    |                      |
| Operating current in the switched state at 24 V DC                             | I <sub>b</sub> | mA             | 25  | 25                 | 25                 | 25                   |
| Maximum load current   | I <sub>e</sub> | mA             | 300   | 300                | 300                | 300                  |
| Voltage drop at I <sub>e</sub>   | U <sub>d</sub> | V              | 2.5   | 2.5                | 2.5                | 2.5                  |
| Switching Frequency  |                | Hz             | 100   | 100                | 20                 | 20                   |
| Min. load current  | I <sub>e</sub> | mA             | 1   | 1                  | 1                  | 1                    |
| Residual current through the load in the blocked state at 230 V AC and 24 V DC | I <sub>r</sub> | mA             | 0.15  | 0.15               | 0.15               | 0.15                 |
| Switching state display  |                | LED            | Red   | Red                | Red                | Red                  |
| Operating voltage display  |                | LED            | Green   | Green              | Green              | Green                |
| Protective functions   |                |                | Short-circuit protective device<br>Protection against polarity reversal |                    |                    |                      |
| Connection   |                |                | 4-wire  | 4-wire             | 4-wire             | 4-wire               |
| Style  |                |                |   |                    |                    |                      |
| Design (outer dimensions)  |                | mm             | 79 x 79 x 39  | 79 x 79 x 39       | 109 x 110 x 41     | 171.5 x 171.5 x 67.4 |
| For connection of:   |                |                | Plug-in connection M12 x 1  |                    |                    |                      |
| Material   |                |                | Insulated material  | Insulated material | Insulated material | Insulated material   |
| Surface  |                |                | PPS   | PPS                | PPS                | PPS                  |

## Notes

Further technical data can be found in the Online Catalog at <http://de.ecat.moeller.net>



## Description



- ① Outputs with function display on all models.
- ② All models with M12 plug connector or cable (2 m).
- ③ Versions for flush or non-flush mounting available.

### Short Description

Eaton's proximity sensors of the Global series have been developed specially for OEM series production. The sensors feature only the functions required for reliable operation. This means that you do not pay for additional, unnecessary functions but get the performance and features you expect from a sensor. Our DC versions feature a short-circuit protective device and a rating of up to 2000 measuring cycles per second. The outputs of all models are equipped with a function display. The Global model series includes models with various diameters from 8 to 30 mm, making it truly versatile in installation. Versions with various ranges are also available. The proximity sensors Global are DC or AC units with 2- or 3-wire, NPN or PNP configuration. Versions for hard-wiring or with M12 plug connector are available. The DC versions have a rated load current of 100 mA, the AC versions of 200 mA.

### Product Features







- The Global Proximity Line features solid performance and a basic feature set for reliable, cost-effective sensing.
- Available in a variety of sizes to fit in all of your applications: 8 mm, 12 mm, 18 mm and 30 mm diameters.
- The input voltage of the DC versions is 10 – 30 V DC in 2- and 3-wire configuration (PNP and NPN).
- The input voltage of the AC voltage variants is 2-AC 20...250 V.
- The operating frequency of the DC versions is 2 kHz.
- Versions for flush or non-flush installation available.
- Connection through cable (2 meters) or M12 plug connector
- The DC versions feature a short-circuit protective device.

### Approvals



cCSAus

Ordering







|   | Rated operational voltage<br>$U_e$ | Rated switching distance<br>$S_n$<br>mm | Type of mounting     | Switching type                | For connection of:            | Contact configuration<br>N/O = normally open contact<br>N/C = normally closed contact | Part no.<br>Article no.         | Price<br>see price list  | Std. pack |
|---|------------------------------------|---|----------------------|-------------------------------|-------------------------------|---|---------------------------------|--|-----------|
| <b>E57 Global series</b>  |                                    |   |                      |                               |                               |   |                                 |  |           |
| 2-wire<br>Metal   |                                    |   |                      |                               |                               |   |                                 |  |           |
| M12 x 1   |                                    |   |                      |                               |                               |   |                                 |  |           |
|    | 10 - 30 V DC                       | 2                                       | Flush                | -                             | 2 m connection cable          | 1 N/O   | <b>E57-12GS02-D</b><br>135883   | 1 off<br>      |           |
|   |                                    |   |                      |                               | Plug-in connection<br>M12 x 1 | 1 N/O   | <b>E57-12GS02-DBB</b><br>135884 |  |           |
|   |                                    | 4                                       | Non-flush            | 2 m connection cable          | 1 N/O                         | <b>E57-12GU04-D</b><br>135891   |                                 |  |           |
|   |                                    |   |                      | 2 m connection cable          | 1 NC                          | <b>E57-12GU04-D1</b><br>135892  |                                 |  |           |
|   |                                    | 8                                       | Non-flush            | Plug-in connection<br>M12 x 1 | 1 N/O                         | <b>E57-12GU04-DBB</b><br>135893   |                                 |  |           |
|   |                                    |   |                      | 2 m connection cable          | 1 NC                          | <b>E57-12GE08-D1</b><br>135872  |                                 |  |           |
|   |                                    | 8                                       | Non-flush            | Plug-in connection<br>M12 x 1 | 1 NC                          | <b>E57-12GE08-D1DB</b><br>135873  |                                 |  |           |
|   |                                    |   |                      | Plug-in connection<br>M12 x 1 | 1 N/O                         | <b>E57-12GE08-DBB</b><br>135874   |                                 |  |           |
|   | 8                                  | Non-flush                               | 2 m connection cable | 1 N/O                         | <b>E57-12GE08-D</b><br>135871 |   |                                 |  |           |
|   |                                    |   | 20 - 250 V AC        | 2                             | Flush                         | -   | 2 m connection cable            |  | 1 N/O     |
|   | Plug-in connection<br>M12 x 1      | 1 N/O                                   |                      |                               |                               |   | <b>E57-12GS02-AAB</b><br>135880 |  |           |
|   | 4                                  | Non-flush                               |                      | 2 m connection cable          | 1 N/O                         | <b>E57-12GU04-A</b><br>135887   |                                 |  |           |
|   |                                    |   |                      | Plug-in connection<br>M12 x 1 | 1 N/O                         | <b>E57-12GU04-AAB</b><br>135888   |                                 |  |           |
|   | M18 x 1                            |   |                      |                               |                               |   |                                 |  |           |
|  | 10 - 30 V DC                       | 5                                       | Flush                | -                             | 2 m connection cable          | 1 N/O   | <b>E57-18GS05-D</b><br>135929   | 1 off<br>  |           |
|   |                                    |   |                      |                               | Plug-in connection<br>M12 x 1 | 1 N/O   | <b>E57-18GS05-DBB</b><br>135930 |  |           |
|   |                                    | 8                                       | Non-flush            | 2 m connection cable          | 1 N/O                         | <b>E57-18GU08-D</b><br>135937   |                                 |  |           |
|   |                                    |   |                      | Plug-in connection<br>M12 x 1 | 1 N/O                         | <b>E57-18GU08-DBB</b><br>135938   |                                 |  |           |
|   |                                    | 16                                      | Non-flush            | 2 m connection cable          | 1 N/O                         | <b>E57-18GE16-D</b><br>135917   |                                 |  |           |
|   |                                    |   |                      | 2 m connection cable          | 1 NC                          | <b>E57-18GE16-D1</b><br>135918  |                                 |  |           |
|   |                                    | 16                                      | Non-flush            | Plug-in connection<br>M12 x 1 | 1 NC                          | <b>E57-18GE16-D1DB</b><br>135919  |                                 |  |           |
|   |                                    |   |                      | Plug-in connection<br>M12 x 1 | 1 N/O                         | <b>E57-18GE16-DBB</b><br>135920   |                                 |  |           |
|   | 20 - 250 V AC                      | 5                                       | Flush                | -                             | 2 m connection cable          | 1 N/O   | <b>E57-18GS05-A</b><br>135925   |  |           |
|   |                                    |   |                      |                               | Plug-in connection<br>M12 x 1 | 1 N/O   | <b>E57-18GS05-AAB</b><br>135926 |  |           |
|   |                                    | 8                                       | Non-flush            | 2 m connection cable          | 1 N/O                         | <b>E57-18GU08-A</b><br>135933   |                                 |  |           |
|   |                                    |   |                      | Plug-in connection<br>M12 x 1 | 1 N/O                         | <b>E57-18GU08-AAB</b><br>135934   |                                 |  |           |
|   |                                    | 16                                      | Non-flush            | Plug-in connection<br>M12 x 1 | 1 N/O                         | <b>E57-18GE16-AAB</b><br>135916   |                                 |  |           |

Information relevant for export to North America



Product Standards  
UL File No.  
UL CCN  
CSA File No.  
CSA Class No.  
NA Certification  
Max. Voltage Rating  
Degree of Protection

UL 508; CSA-C22.2 No. 14; IEC60947-5-2; CE marking  
CSA report applies to both Canada and US  
-  
224447  
4652-04 / 4652-84  
CSA certified  
250 V AC, 30 V DC  
IEC: IP67, IP69K; UL/CSA Type: -

| Rated operational voltage<br>$U_e$  | Rated switching distance<br>$S_n$<br>mm | Type of mounting              | Switching type                | For connection of:              | Contact configuration<br>N/O = normally open contact<br>N/C = normally closed contact | Part no.<br>Article no.          | Price<br>see price list          | Std. pack  |
|---|---|-------------------------------|-------------------------------|---------------------------------|---|----------------------------------|----------------------------------|--|
| <b>E57 Global series</b>  |   |                               |                               |                                 |   |                                  |                                  |  |
| 2-wire<br>Metal   |   |                               |                               |                                 |   |                                  |                                  |  |
| M30 x 1.5   |   |                               |                               |                                 |   |                                  |                                  |  |
|    | 10 - 30 V DC                            | 10                            | Flush                         | -                               | 2 m connection cable  | 1 N/O                            | <b>E57-30GS10-D</b><br>135973    | 1 off<br>      |
|   |   |                               |                               |                                 | 2 m connection cable  | 1 NC                             | <b>E57-30GS10-D1</b><br>135974   |  |
|   |   |                               |                               |                                 | Plug-in connection<br>M12 x 1   | 1 N/C                            | <b>E57-30GS10-D1DB</b><br>135975 |  |
|   |   | Plug-in connection<br>M12 x 1 | 1 N/O                         | <b>E57-30GS10-DDB</b><br>135976 |   |                                  |                                  |  |
|   |   | 2 m connection cable          | 1 N/O                         | <b>E57-30GU15-D</b><br>135983   |   |                                  |                                  |  |
|   |   | Plug-in connection<br>M12 x 1 | 1 N/O                         | <b>E57-30GU15-DDB</b><br>135984 |   |                                  |                                  |  |
|   | 15                                      | Non-flush                     | -                             | 2 m connection cable            | 1 N/O   | <b>E57-30GE25-D</b><br>135961    |                                  |  |
|   |   |                               |                               | 2 m connection cable            | 1 N/C   | <b>E57-30GE25-D1</b><br>135962   |                                  |  |
|   |   |                               |                               | Plug-in connection<br>M12 x 1   | 1 NC  | <b>E57-30GE25-D1DB</b><br>135963 |                                  |  |
|   |   | Non-flush                     | -                             | Plug-in connection<br>M12 x 1   | 1 N/O   | <b>E57-30GE25-DDB</b><br>135964  |                                  |  |
|   |   |                               |                               | 2 m connection cable            | 1 N/O   | <b>E57-30GS10-A</b><br>135969    |                                  |  |
|   |   |                               |                               | Plug-in connection<br>M12 x 1   | 1 N/O   | <b>E57-30GS10-AAB</b><br>135970  |                                  |  |
| 20 - 250 V AC   | 10                                      | Flush                         | -                             | 2 m connection cable            | 1 N/O   | <b>E57-30GS10-A</b><br>135969    |                                  |  |
|   |   |                               |                               | 2 m connection cable            | 1 N/O   | <b>E57-30GU15-A</b><br>135979    |                                  |  |
|   |   |                               |                               | Plug-in connection<br>M12 x 1   | 1 N/O   | <b>E57-30GU15-AAB</b><br>135980  |                                  |  |
|   | 15                                      | Non-flush                     | -                             | 2 m connection cable            | 1 N/O   | <b>E57-30GS10-A</b><br>135969    |                                  |  |
|   |   |                               |                               | 2 m connection cable            | 1 N/O   | <b>E57-30GU15-A</b><br>135979    |                                  |  |
|   |   |                               |                               | Plug-in connection<br>M12 x 1   | 1 N/O   | <b>E57-30GU15-AAB</b><br>135980  |                                  |  |
| 3-wire<br>Stainless steel   |   |                               |                               |                                 |   |                                  |                                  |  |
| M8 x 1  |   |                               |                               |                                 |   |                                  |                                  |  |
|  | 10 - 30 V DC                            | 1                             | Flush                         | NPN                             | 2 m connection cable  | 1 N/O                            | <b>E57-08GS01-C</b><br>135859    | 1 off<br>  |
|   |   |                               |                               |                                 | Plug-in connection<br>M12 x 1   | 1 N/O                            | <b>E57-08GS01-CDB</b><br>135860  |  |
|   |   |                               |                               |                                 | 2 m connection cable  | 1 N/O                            | <b>E57-08GS01-G</b><br>135861    |  |
|   |   |                               | Plug-in connection<br>M12 x 1 | 1 N/O                           | <b>E57-08GS01-GDB</b><br>135862   |                                  |                                  |  |
|   |   |                               | Non-flush                     | NPN                             | 2 m connection cable  | 1 N/O                            | <b>E57-08GU02-C</b><br>135863    |  |
|   |   |                               |                               |                                 | Plug-in connection<br>M12 x 1   | 1 N/O                            | <b>E57-08GU02-CDB</b><br>135864  |  |
|   |   | 2 m connection cable          |                               |                                 | 1 N/O   | <b>E57-08GU02-G</b><br>135865    |                                  |  |
|   |   | Flush                         | NPN                           | -                               | Plug-in connection<br>M12 x 1   | 1 N/O                            | <b>E57-08GU02-GDB</b><br>135866  |  |
|   |   |                               |                               |                                 | 2 m connection cable  | 1 NC                             | <b>E57-08GBE03-C</b><br>135850   |  |
|   |   |                               |                               |                                 | 2 m connection cable  | 1 N/O                            | <b>E57-08GE03-C</b><br>135851    |  |
|   |   | 3                             | Flush                         | -                               | Plug-in connection<br>M12 x 1   | 1 N/O                            | <b>E57-08GE03-CDB</b><br>135852  |  |
|   |   |                               |                               |                                 | 2 m connection cable  | 1 N/O                            | <b>E57-08GE03-G</b><br>135853    |  |
|   |   |                               |                               |                                 | Plug-in connection<br>M12 x 1   | 1 N/O                            | <b>E57-08GE03-GDB</b><br>135854  |  |
|   |   |                               | NPN                           | -                               | 2 m connection cable  | 1 N/O                            | <b>E57-08GE03-G</b><br>135853    |  |
|   |   |                               |                               |                                 | 2 m connection cable  | 1 N/O                            | <b>E57-08GE03-G</b><br>135853    |  |
| Plug-in connection<br>M12 x 1   | 1 N/O                                   |                               |                               |                                 | <b>E57-08GE03-GDB</b><br>135854   |                                  |                                  |  |








Information relevant for export to North America



Product Standards  
UL File No.  
UL CCN  
CSA File No.  
CSA Class No.  
NA Certification  
Max. Voltage Rating  
Degree of Protection

UL 508; CSA-C22.2 No. 14; IEC60947-5-2; CE marking  
CSA report applies to both Canada and US  
-  
224447  
4652-04 / 4652-84  
CSA certified  
250 V AC, 30 V DC  
IEC: IP67, IP69K; UL/CSA Type: -



|   | Rated operational voltage<br>$U_e$ | Rated switching distance<br>$S_n$<br>mm | Type of mounting              | Switching type | For connection of:              | Contact configuration<br>N/O = normally open contact<br>N/C = normally closed contact | Part no.<br>Article no.         | Price<br>see price list | Std. pack  |
|---|------------------------------------|---|-------------------------------|----------------|---------------------------------|---|---------------------------------|-------------------------|--|
| <b>E57 Global series</b>  |                                    |   |                               |                |                                 |   |                                 |                         |  |
| <b>3-wire</b>   |                                    |   |                               |                |                                 |   |                                 |                         |  |
| <b>M8 x 1, Stainless steel</b>  |                                    |   |                               |                |                                 |   |                                 |                         |  |
|    | 10 - 30 V DC                       | 6                                       | Non-flush                     | NPN            | 2 m connection cable            | 1 N/O   | <b>E57-08GE06-C</b><br>135855   |                         | 1 off<br>      |
|   |                                    |   |                               |                | Plug-in connection<br>M12 x 1   | 1 N/O   | <b>E57-08GE06-CDB</b><br>135856 |                         |  |
|   |                                    |   |                               | PNP            | 2 m connection cable            | 1 N/O   | <b>E57-08GE06-G</b><br>135857   |                         |  |
|   |                                    |   |                               |                | Plug-in connection<br>M12 x 1   | 1 N/O   | <b>E57-08GE06-GDB</b><br>135858 |                         |  |
| <b>M12 x 1, Metal</b>   |                                    |   |                               |                |                                 |   |                                 |                         |  |
|    | 10 - 30 V DC                       | 2                                       | Flush                         | NPN            | 2 m connection cable            | 1 N/O   | <b>E57-12GS02-C</b><br>135881   |                         | 1 off<br>      |
|   |                                    |   |                               |                | Plug-in connection<br>M12 x 1   | 1 N/O   | <b>E57-12GS02-CDB</b><br>135882 |                         |  |
|   |                                    |   |                               | PNP            | 2 m connection cable            | 1 N/O   | <b>E57-12GS02-G</b><br>135885   |                         |  |
|   |                                    |   |                               |                | Plug-in connection<br>M12 x 1   | 1 N/O   | <b>E57-12GS02-GDB</b><br>135886 |                         |  |
|   |                                    | 4                                       | Non-flush                     | NPN            | 2 m connection cable            | 1 N/O   | <b>E57-12GU04-C</b><br>135889   |                         |  |
|   |                                    |   |                               |                | Plug-in connection<br>M12 x 1   | 1 N/O   | <b>E57-12GU04-CDB</b><br>135890 |                         |  |
|   |                                    |   |                               | PNP            | 2 m connection cable            | 1 N/O   | <b>E57-12GU04-G</b><br>135894   |                         |  |
|   |                                    |   |                               |                | Plug-in connection<br>M12 x 1   | 1 N/O   | <b>E57-12GU04-GDB</b><br>135895 |                         |  |
|   |                                    | 5                                       | Flush                         | NPN            | 2 m connection cable            | 1 N/O   | <b>E57-12GE05-C</b><br>135867   |                         |  |
|   |                                    |   |                               |                | Plug-in connection<br>M12 x 1   | 1 N/O   | <b>E57-12GE05-CDB</b><br>135868 |                         |  |
|   |                                    |   |                               | PNP            | 2 m connection cable            | 1 N/O   | <b>E57-12GE05-G</b><br>135869   |                         |  |
|   |                                    |   |                               |                | Plug-in connection<br>M12 x 1   | 1 N/O   | <b>E57-12GE05-GDB</b><br>135870 |                         |  |
| 10  | Non-flush                          | NPN                                     | 2 m connection cable          | 1 N/O          | <b>E57-12GE10-C</b><br>135875   |   |                                 |                         |  |
|   |                                    |   | Plug-in connection<br>M12 x 1 | 1 N/O          | <b>E57-12GE10-CDB</b><br>135876 |   |                                 |                         |  |
|   |                                    | PNP                                     | 2 m connection cable          | 1 N/O          | <b>E57-12GE10-G</b><br>135877   |   |                                 |                         |  |
|   |                                    |   | Plug-in connection<br>M12 x 1 | 1 N/O          | <b>E57-12GE10-GDB</b><br>135878 |   |                                 |                         |  |
| <b>M18 x 1, Metal</b>   |                                    |   |                               |                |                                 |   |                                 |                         |  |
|  | 10 - 30 V DC                       | 5                                       | Flush                         | NPN            | 2 m connection cable            | 1 N/O   | <b>E57-18GS05-C</b><br>135927   |                         | 1 off<br>  |
|   |                                    |   |                               |                | Plug-in connection<br>M12 x 1   | 1 N/O   | <b>E57-18GS05-CDB</b><br>135928 |                         |  |
|   |                                    |   |                               | PNP            | 2 m connection cable            | 1 N/O   | <b>E57-18GS05-G</b><br>135931   |                         |  |
|   |                                    |   |                               |                | Plug-in connection<br>M12 x 1   | 1 N/O   | <b>E57-18GS05-GDB</b><br>135932 |                         |  |
|   |                                    | 8                                       | Flush                         | NPN            | 2 m connection cable            | 1 N/O   | <b>E57-18GE08-C</b><br>135912   |                         |  |
|   |                                    |   |                               |                | Plug-in connection<br>M12 x 1   | 1 N/O   | <b>E57-18GE08-CDB</b><br>135913 |                         |  |
| PNP   | Flush                              | NPN                                     | 2 m connection cable          | 1 N/O          | <b>E57-18GE08-G</b><br>135914   |   |                                 |                         |  |
|   |                                    |   | Plug-in connection<br>M12 x 1 | 1 N/O          | <b>E57-18GE08-GDB</b><br>135915 |   |                                 |                         |  |

WWW.TM2A.PT info@tm2a.pt















WWW.TM2A.PT info@tm2a.pt

**Information relevant for export to North America**



Product Standards  
UL File No.  
UL CCN  
CSA File No.  
CSA Class No.  
NA Certification  
Max. Voltage Rating  
Degree of Protection

UL 508; CSA-C22.2 No. 14; IEC60947-5-2; CE marking  
CSA report applies to both Canada and US  
-  
224447  
4652-04 / 4652-84  
CSA certified  
250 V AC, 30 V DC  
IEC: IP67, IP69K; UL/CSA Type: -

| Rated operational voltage<br>$U_e$   | Rated switching distance<br>$S_n$<br>mm | Type of mounting | Switching type | For connection of:            | Contact configuration<br>N/O = normally open contact<br>N/C = normally closed contact | Part no.<br>Article no.         | Price<br>see price list   | Std. pack   |   |   |                                 |
|--|---|------------------|----------------|-------------------------------|---|---------------------------------|---|---|---|---|---------------------------------|
| <b>E57 Global series</b>   |   |                  |                |                               |   |                                 |   |   |   |   |                                 |
| 3-wire   |   |                  |                |                               |   |                                 |   |   |   |   |                                 |
| M18 x 1<br>Metal   |   |                  |                |                               |   |                                 |   |   |   |   |                                 |
|   | 10 - 30 V DC                            | 8                | Non-flush      | NPN                           | 2 m connection cable  | 1 N/O                           | <b>E57-18GU08-C</b><br>135935   | 1 off   |   |   |                                 |
|  |   |                  |                |                               | Plug-in connection<br>M12 x 1   | 1 N/O                           | <b>E57-18GU08-CDB</b><br>135936   |   |   |   |                                 |
|  |   |                  |                | PNP                           | 2 m connection cable  | 1 N/O                           | <b>E57-18GU08-G</b><br>135939   |   |   |   |                                 |
|  |   |                  |                |                               | Plug-in connection<br>M12 x 1   | 1 N/O                           | <b>E57-18GU08-GDB</b><br>135940   |   |   |   |                                 |
|  | 18                                      | Non-flush        | NPN            | 2 m connection cable          | 1 N/O   | <b>E57-18GE18-C</b><br>135921   | 1 off   |   |   |   |                                 |
|  |   |                  |                | Plug-in connection<br>M12 x 1 | 1 N/O   | <b>E57-18GE18-CDB</b><br>135922 |   |   |   |   |                                 |
|  |   |                  | PNP            | 2 m connection cable          | 1 N/O   | <b>E57-18GE18-G</b><br>135923   |   |   |   |   |                                 |
|  |   |                  |                | Plug-in connection<br>M12 x 1 | 1 N/O   | <b>E57-18GE18-GDB</b><br>135924 |   |   |   |   |                                 |
| 3-wire   |   |                  |                |                               |   |                                 |   |   |   |   |                                 |
| M30 x 1.5<br>Metal   |   |                  |                |                               |   |                                 |   |   |   |   |                                 |
|  | 10 - 30 V DC                            | 10               | Flush          | NPN                           | 2 m connection cable  | 1 N/O                           |   | <b>E57-30GS10-C</b><br>135971   | 1 off   |   |                                 |
|  |   |                  |                |                               | Plug-in connection<br>M12 x 1   | 1 N/O                           |   | <b>E57-30GS10-CDB</b><br>135972   |   |   |                                 |
|  |   |                  |                | PNP                           | 2 m connection cable  | 1 N/O                           | <b>E57-30GS10-G</b><br>135977   |   |   |   |                                 |
|  |   |                  |                |                               | Plug-in connection<br>M12 x 1   | 1 N/O                           | <b>E57-30GS10-GDB</b><br>135978   |   |   |   |                                 |
|  |   | 15               | Flush          | NPN                           | 2 m connection cable  | 1 N/O                           | <b>E57-30GE15-C</b><br>135957   | 1 off   |   |   |                                 |
|  |   |                  |                |                               | Plug-in connection<br>M12 x 1   | 1 N/O                           | <b>E57-30GE15-CDB</b><br>135958   |   |   |   |                                 |
|  |   |                  |                | PNP                           | 2 m connection cable  | 1 N/O                           | <b>E57-30GE15-G</b><br>135959   |   |   |   |                                 |
|  |   |                  |                |                               | Plug-in connection<br>M12 x 1   | 1 N/O                           | <b>E57-30GE15-GDB</b><br>135960   |   |   |   |                                 |
|  | 29                                      | Non-flush        | NPN            | 2 m connection cable          | 1 N/O   | <b>E57-30GU15-C</b><br>135981   | 1 off   |   |   |   |                                 |
|  |   |                  |                |                               | Plug-in connection<br>M12 x 1   | 1 N/O                           |   |   |   | <b>E57-30GU15-CDB</b><br>135982   |                                 |
|  |   |                  |                | PNP                           | 2 m connection cable  | 1 N/O                           |   |   |   | <b>E57-30GU15-G</b><br>135985   |                                 |
|  |   |                  |                |                               |   | Plug-in connection<br>M12 x 1   |   |   |   | 1 N/O   | <b>E57-30GU15-GDB</b><br>135986 |
|  |   |                  | NPN            | 2 m connection cable          | 1 N/O   | <b>E57-30GE29-C</b><br>135965   |   |   |   | 1 off   |                                 |
|  |   |                  |                |                               | Plug-in connection<br>M12 x 1   | 1 N/O                           |   |   |   |   | <b>E57-30GE29-CDB</b><br>135966 |
|  |   |                  |                | PNP                           | 2 m connection cable  | 1 N/O                           |   |   |   |   | <b>E57-30GE29-G</b><br>135967   |
|  |   |                  |                |                               |   | Plug-in connection<br>M12 x 1   |   |   |   |   | 1 N/O                           |

Information relevant for export to North America











Product Standards  
UL File No.  
UL CCN  
CSA File No.  
CSA Class No.  
NA Certification  
Max. Voltage Rating  
Degree of Protection

UL 508; CSA-C22.2 No. 14; IEC60947-5-2; CE marking  
CSA report applies to both Canada and US  
-  
224447  
4652-04 / 4652-84  
CSA certified  
250 V AC, 30 V DC  
IEC: IP67, IP69K; UL/CSA Type: -

Engineering

Circuit diagram
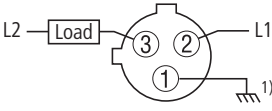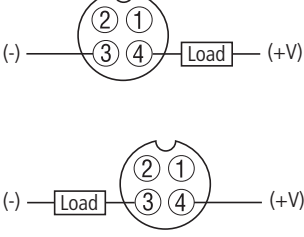
|                        | 2 m connection cable  | Plug-in connection M12   |
|------------------------|---|--|
| <b>AC, 2-wire</b>      | <p>E57...-A</p>  <p><sup>1)</sup>Built-in connected to enclosure (wiring optional)</p> | <p>E57...-AAB</p>  <p><sup>1)</sup>Built-in connected to enclosure (wiring optional)</p> |
| <b>DC, 2-wire</b>      | <p>E57...-D<br/>E57...-D1</p>    | <p>E57...-DDB<br/>E57...-D1DB</p>    |
| <b>DC, 3-wire, NPN</b> | <p>E57...-C</p>   | <p>E57...-CDB</p>   |
| <b>DC, 3-wire, PNP</b> | <p>E57...-G</p>    | <p>E57...-GDB</p>    |

WWW.TM2A.PT info@tm2a.pt

WWW.TM2A.PT info@tm2a.pt



## Technical data

| 2-wire AC  |          |  |   | E57-12...                        | E57-18...   | E57-30...   |
|--|----------|--|---|----------------------------------|-------------|-------------|
| <b>General</b>   |          |  |   |                                  |             |             |
| Standards  |          |  |   | IEC/EN 60947-5-2                 |             |             |
| Ambient temperature  |          |  |   | - 25 - + 70                      | - 25 - + 70 | - 25 - + 70 |
| Protection type  |          |  |   | IP67, IP69K                      | IP67, IP69K | IP67, IP69K |
| Mechanical shock resistance  |          |  |   | 30<br>Shock duration 11 ms       |             |             |
| <b>Characteristics</b>   |          |  |   |                                  |             |             |
| Repetition accuracy of $S_n$   |          |  |   |                                  |             |             |
|  | ...GS... |  | % | 1                                | 1           | 1           |
|  | ...GU... |  | % | 3                                | 3           | 3           |
| Temperature drift of $S_n$   |          |  |   | 10                               | 10          | 10          |
| Switching hysteresis of $S_n$  |          |  |   | 15                               | 15          | 15          |
| Rated operational voltage  |          |  |   | 20 - 250 V AC                    |             |             |
| Maximum load current   |          |  |   | $I_e$ < 200                      |             |             |
| Voltage drop at $I_e$  |          |  |   | $U_d$ 8                          |             |             |
| Switching Frequency  |          |  |   | 25                               |             |             |
| Min. load current  |          |  |   | $I_e$ 5                          |             |             |
| Residual current through the load in the blocked state at 230 V AC and 24 V DC |          |  |   | $I_r$ 1.8                        |             |             |
| Switching state display  |          |  |   | LED Red                          |             |             |
| Connection   |          |  |   | 2-wire                           |             |             |
| Design (outer dimensions)  |          |  |   | mm M12 x 1 / M18 x 1 / M30 x 1.5 |             |             |
| Material   |          |  |   | Metal                            |             |             |

| 2-wire DC  |           |       |    | E57-12...                        | E57-18...   | E57-30...   |
|--|-----------|-------|----|----------------------------------|-------------|-------------|
| <b>General</b>   |           |       |    |                                  |             |             |
| Standards  |           |       |    | IEC/EN 60947-5-2                 |             |             |
| Ambient temperature  |           |       |    |                                  |             |             |
|  | ...GS...  |       | °C | - 25 - + 70                      | - 25 - + 70 | - 25 - + 70 |
|  | ...GU...  |       | °C | - 25 - + 70                      | - 25 - + 70 | - 25 - + 70 |
|  | ...GE...  |       | °C | - 0 - + 60                       | - 0 - + 60  | - 0 - + 60  |
| Protection type  |           |       |    | IP67, IP69K                      | IP67, IP69K | IP67, IP69K |
| Mechanical shock resistance  |           |       |    | 30<br>Shock duration 11 ms       |             |             |
| <b>Characteristics</b>   |           |       |    |                                  |             |             |
| Repetition accuracy of $S_n$   |           |       |    | 2                                | 2           | 2           |
| Temperature drift of $S_n$   |           |       |    | 10                               | 10          | 10          |
| Switching hysteresis of $S_n$  |           |       |    | 15                               | 15          | 15          |
| Rated operational voltage  |           |       |    | $U_e$ 10 - 30 V DC               |             |             |
| Operating current in the switched state at 24 V DC                             |           |       |    |                                  |             |             |
|  | ...GS...  | $I_b$ | mA | 10                               | 10          | 10          |
|  | ...GU...  | $I_b$ | mA | 20                               | 20          | 20          |
|  | ...GE...  | $I_b$ | mA | 10                               | 10          | 10          |
| Maximum load current   |           |       |    | $I_e$ < 100                      |             |             |
| Voltage drop at $I_e$  |           |       |    | $U_d$ 6                          |             |             |
| Switching Frequency  |           |       |    |                                  |             |             |
|  | Flush     |       | Hz | 1000                             | 1000        | 500         |
|  | Non-flush |       | Hz | 1000                             | 500         | 200         |
| Min. load current  |           |       |    | $I_e$ 5                          |             |             |
| Residual current through the load in the blocked state at 230 V AC and 24 V DC |           |       |    | $I_r$ 0.01                       |             |             |
| Switching state display  |           |       |    | LED Red                          |             |             |
| Connection   |           |       |    | 2-wire                           |             |             |
| Design (outer dimensions)  |           |       |    | mm M12 x 1 / M18 x 1 / M30 x 1.5 |             |             |
| Material   |           |       |    | Metal                            |             |             |


## Notes

Further technical data can be found in the Online Catalog at <http://de.ecat.moeller.net>

| 3-wire DC  |                  |       |    | E57-08...   | E57-12...    | E57-18...    | E57-30...    |
|--|------------------|-------|----|---|--------------|--------------|--------------|
| <b>General</b>   |                  |       |    |   |              |              |              |
| Standards  |                  |       |    | IEC/EN 60947-5-2  |              |              |              |
| Ambient temperature  |                  |       |    |   |              |              |              |
|  | ...GS...         |       | °C | - 25 - + 70   | - 25 - + 70  | - 25 - + 70  | - 25 - + 70  |
|  | ...GU...         |       | °C | - 25 - + 70   | - 25 - + 70  | - 25 - + 70  | - 25 - + 70  |
|  | ...GB...         |       | °C | - 25 - + 70   | -            | -            | -            |
|  | ...GE...         |       | °C | - 0 - + 60  | - 0 - + 60   | - 0 - + 60   | - 0 - + 60   |
| Protection type  |                  |       |    | IP67, IP69K   | IP67, IP69K  | IP67, IP69K  | IP67, IP69K  |
| Mechanical shock resistance  |                  |       |    | 30<br>Shock duration 11 ms  |              |              |              |
| <b>Characteristics</b>   |                  |       |    |   |              |              |              |
| Repetition accuracy of $S_n$   |                  |       |    | 1   | 1            | 1            | 1            |
| Temperature drift of $S_n$   |                  |       |    | 10  | 10           | 10           | 10           |
| Switching hysteresis of $S_n$  |                  |       |    | 15  | 15           | 15           | 15           |
| Rated operational voltage  |                  |       |    | 10 - 30 V DC  | 10 - 30 V DC | 10 - 30 V DC | 10 - 30 V DC |
| Residual ripple of $U_e$   |                  |       |    | 10  | 10           | 10           | 10           |
| Operating current in the switched state at 24 V DC                             |                  |       |    |   |              |              |              |
|  | ...GS...         | $I_b$ | mA | 10  | 10           | 10           | 10           |
|  | ...GU...         | $I_b$ | mA | 10  | 20           | 20           | 20           |
|  | ...GE...         | $I_b$ | mA | 10  | 10           | 10           | 10           |
| Maximum load current   |                  |       |    | $I_e$   | $I_e$        | $I_e$        | $I_e$        |
|  |                  |       | mA | < 100   | < 100        | < 100        | < 100        |
| Voltage drop at $I_e$  |                  |       |    | $U_d$   | $U_d$        | $U_d$        | $U_d$        |
|  |                  |       | V  | 1.5   | 1.5          | 1.5          | 1.5          |
| Switching Frequency  |                  |       |    |   |              |              |              |
|  | <b>Flush</b>     |       | Hz | 2000  | 2000         | 1000         | 500          |
|  | <b>Non-flush</b> |       | Hz | 2000  | 1000         | 500          | 200          |
| Residual current through the load in the blocked state at 230 V AC and 24 V DC |                  |       |    | $I_r$   | $I_r$        | $I_r$        | $I_r$        |
|  |                  |       | mA | 0.01  | 0.01         | 0.01         | 0.01         |
| Switching state display  |                  |       |    | LED   | LED          | LED          | LED          |
|  |                  |       |    | Red   | Red          | Red          | Red          |
| Protective functions   |                  |       |    | Short-circuit protective device<br>Protection against polarity reversal<br>Protection against wire breakage |              |              |              |
| Connection   |                  |       |    | 3-wire  | 3-wire       | 3-wire       | 3-wire       |
| Design (outer dimensions)  |                  |       |    | mm  | mm           | mm           | mm           |
|  |                  |       |    | M8 x 1  | M12 x 1      | M18 x 1      | M30 x 1.5    |
| Material   |                  |       |    | Stainless steel   | Metal        | Metal        | Metal        |

Dimensions

2 m connection cable




| 2             | Typ           | a       | b         |           | c         |           | d         |           | e         |   |
|---------------|---------------|---------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|---|
|               |               |         | mm (inch) | mm (inch) | mm (inch) | mm (inch) | mm (inch) | mm (inch) | mm (inch) |   |
| 20 - 250 V AC | E57-12GS02-A  | M12 x 1 | 65 (2.56) | 15 (0.59) | 50 (1.97) | -         | -         | -         | -         | - |
|               | E57-12GU04-A  | M12 x 1 | 60 (2.36) | 15 (0.59) | 42 (1.66) | 8 (0.31)  | -         | -         | -         | - |
|               | E57-18GS05-A  | M18 x 1 | 80 (3.15) | 20 (0.79) | 60 (2.36) | -         | -         | -         | -         | - |
|               | E57-18GU08-A  | M18 x 1 | 80 (3.15) | 20 (0.79) | 48 (1.89) | 12 (0.47) | -         | -         | -         | - |
|               | E57-30GS10-A  | M30     | 80 (3.15) | 20 (0.79) | 60 (2.36) | -         | -         | -         | -         | - |
|               | E57-30GU15-A  | M30     | 80 (3.15) | 20 (0.79) | 45 (1.77) | 15 (0.59) | -         | -         | -         | - |
| 10 - 30 V DC  | E57-12GS02-D  | M12 x 1 | 50 (1.97) | -         | 50 (1.97) | -         | -         | -         | -         | - |
|               | E57-12GU04-D  | M12 x 1 | 50 (1.97) | -         | 42 (1.66) | 8 (0.31)  | -         | -         | -         | - |
|               | E57-12GU04-D1 | M12 x 1 | 50 (1.97) | -         | 42 (1.66) | 8 (0.31)  | -         | -         | -         | - |
|               | E57-12GE08-D  | M12 x 1 | 50 (1.97) | -         | 42 (1.66) | 8 (0.31)  | -         | -         | -         | - |
|               | E57-12GE08-D1 | M12 x 1 | 50 (1.97) | -         | 42 (1.66) | 8 (0.31)  | -         | -         | -         | - |
|               | E57-18GS05-D  | M18 x 1 | 55 (2.17) | 5 (0.20)  | 50 (1.97) | -         | -         | -         | -         | - |
|               | E57-18GU08-D  | M18 x 1 | 55 (2.17) | 5 (0.20)  | 38 (1.50) | 12 (0.47) | -         | -         | -         | - |
|               | E57-18GE16-D  | M18 x 1 | 55 (2.17) | 5 (0.20)  | 38 (1.50) | 12 (0.47) | -         | -         | -         | - |
|               | E57-18GE16-D1 | M18 x 1 | 55 (2.17) | 5 (0.20)  | 38 (1.50) | 12 (0.47) | -         | -         | -         | - |
|               | E57-30GS10-D  | M30     | 55 (2.17) | 5 (0.20)  | 50 (1.97) | -         | -         | -         | -         | - |
|               | E57-30GU15-D  | M30     | 55 (2.17) | 5 (0.20)  | 35 (1.38) | 15 (0.59) | -         | -         | -         | - |
|               | E57-30GE25-D  | M30     | 55 (2.17) | 5 (0.20)  | 35 (1.38) | 15 (0.59) | -         | -         | -         | - |
|               | E57-30GE25-D1 | M30     | 55 (2.17) | 5 (0.20)  | 35 (1.38) | 15 (0.59) | -         | -         | -         | - |

| 3            | Typ          | a         | b           |            | c         |             | d         |           | e         |   |
|--------------|--------------|-----------|-------------|------------|-----------|-------------|-----------|-----------|-----------|---|
|              |              |           | mm (inch)   | mm (inch)  | mm (inch) | mm (inch)   | mm (inch) | mm (inch) | mm (inch) |   |
| 10 - 30 V DC | E57-08GE03-C | M8 x 1    | 46 (1.81)   | 6 (0.24)   | 40 (1.57) | -           | -         | -         | -         | - |
|              | E57-08GE06-C | M8 x 1    | 46 (1.81)   | 1 (0.04)   | 41 (1.61) | 4 (0.16)    | -         | -         | -         | - |
|              | E57-08GE03-G | M8 x 1    | 46 (1.81)   | 6 (0.24)   | 40 (1.57) | -           | -         | -         | -         | - |
|              | E57-08GE06-G | M8 x 1    | 46 (1.81)   | 1 (0.04)   | 41 (1.61) | 4 (0.16)    | -         | -         | -         | - |
|              | E57-08GS01-C | M8 x 1    | 45 (1.77)   | -          | 45 (1.77) | -           | -         | -         | -         | - |
|              | E57-08GS01-G | M8 x 1    | 45 (1.77)   | -          | 45 (1.77) | -           | -         | -         | -         | - |
|              | E57-08GU02-C | M8 x 1    | 45 (1.77)   | -          | 41 (1.61) | 4 (0.16)    | -         | -         | -         | - |
|              | E57-08GU02-G | M8 x 1    | 45 (1.77)   | -          | 41 (1.61) | 4 (0.16)    | -         | -         | -         | - |
|              | E57-12GE05-C | M12 x 1   | 51 (2.00)   | 2 (0.08)   | 49 (1.93) | -           | -         | -         | -         | - |
|              | E57-12GE05-G | M12 x 1   | 51 (2.00)   | 2 (0.08)   | 49 (1.93) | -           | -         | -         | -         | - |
|              | E57-12GE10-C | M12 x 1   | 50.5 (1.99) | 1.7 (0.07) | 41 (1.61) | 7.8 (0.31)  | -         | -         | -         | - |
|              | E57-12GE10-G | M12 x 1   | 50.5 (1.99) | 1.7 (0.07) | 41 (1.61) | 7.8 (0.31)  | -         | -         | -         | - |
|              | E57-12GS02-C | M12 x 1   | 50 (1.97)   | -          | 50 (1.97) | -           | -         | -         | -         | - |
|              | E57-12GS02-G | M12 x 1   | 50 (1.97)   | -          | 50 (1.97) | -           | -         | -         | -         | - |
|              | E57-12GU04-C | M12 x 1   | 50 (1.97)   | -          | 42 (1.66) | 8 (0.31)    | -         | -         | -         | - |
|              | E57-12GU04-G | M12 x 1   | 50 (1.97)   | -          | 42 (1.66) | 8 (0.31)    | -         | -         | -         | - |
|              | E57-18GE08-C | M18 x 1   | 67.5 (2.66) | 2.5 (0.10) | 65 (2.56) | -           | -         | -         | -         | - |
|              | E57-18GE08-G | M18 x 1   | 65.5 (2.58) | 2.5 (0.10) | 65 (2.56) | -           | -         | -         | -         | - |
|              | E57-18GE18-C | M18 x 1   | 66 (2.60)   | 2.5 (0.10) | 52 (2.05) | 11.5 (0.45) | -         | -         | -         | - |
|              | E57-18GE18-G | M18 x 1   | 66 (2.60)   | 2.5 (0.10) | 52 (2.05) | 11.5 (0.45) | -         | -         | -         | - |
|              | E57-18GS05-C | M18 x 1   | 55 (2.17)   | 5 (0.20)   | 50 (1.97) | -           | -         | -         | -         | - |
|              | E57-18GS05-G | M18 x 1   | 55 (2.17)   | 5 (0.20)   | 50 (1.97) | -           | -         | -         | -         | - |
|              | E57-18GU08-C | M18 x 1   | 55 (2.17)   | 5 (0.20)   | 38 (1.50) | 12 (0.47)   | -         | -         | -         | - |
|              | E57-18GU08-G | M18 x 1   | 55 (2.17)   | 5 (0.20)   | 38 (1.50) | 12 (0.47)   | -         | -         | -         | - |
|              | E57-30GE15-C | M30       | 69 (2.72)   | 5 (0.20)   | 64 (2.52) | -           | -         | -         | -         | - |
|              | E57-30GE15-G | M30       | 69 (2.72)   | 5 (0.20)   | 64 (2.52) | -           | -         | -         | -         | - |
|              | E57-30GE29-C | M30       | 83 (3.27)   | 5 (0.20)   | 64 (2.52) | 15 (0.59)   | -         | -         | -         | - |
|              | E57-30GE29-G | M30       | 83 (3.27)   | 5 (0.20)   | 64 (2.52) | 15 (0.59)   | -         | -         | -         | - |
|              | E57-30GS10-C | M30       | 55 (2.17)   | 5 (0.20)   | 50 (1.97) | -           | -         | -         | -         | - |
|              | E57-30GS10-G | M30       | 55 (2.17)   | 5 (0.20)   | 50 (1.97) | -           | -         | -         | -         | - |
| E57-30GU15-C | M30          | 55 (2.17) | 5 (0.20)    | 35 (1.38)  | 15 (0.59) | -           | -         | -         | -         |   |
| E57-30GU15-G | M30          | 55 (2.17) | 5 (0.20)    | 35 (1.38)  | 15 (0.59) | -           | -         | -         | -         |   |

WWW.TM2A.PT info@tm2a.pt

WWW.TM2A.PT info@tm2a.pt

Plug-in connection M12 x 1



| 2             | Typ             | a       | b         | c         | d         | e         |
|---------------|-----------------|---------|-----------|-----------|-----------|-----------|
|               |                 |         |           |           |           |           |
| 20 - 250 V AC | E57-12GS02-AAB  | M12 x 1 | 68 (2.68) | 16 (0.63) | 42 (1.66) | -         |
|               | E57-12GU04-AAB  | M12 x 1 | 68 (2.68) | 16 (0.63) | 34 (1.34) | 8 (0.31)  |
|               | E57-18GE16-AAB  | M18 x 1 | 94 (3.70) | 20 (0.79) | 48 (1.89) | 12 (0.47) |
|               | E57-18GS05-AAB  | M18 x 1 | 91 (3.58) | 20 (0.79) | 60 (2.36) | -         |
|               | E57-18GU08-AAB  | M18 x 1 | 91 (3.58) | 20 (0.79) | 48 (1.89) | 12 (0.47) |
|               | E57-30GS10-AAB  | M30     | 80 (3.15) | 20 (0.79) | 60 (2.36) | -         |
|               | E57-30GU15-AAB  | M30     | 91 (3.58) | 20 (0.79) | 45 (1.77) | 15 (0.59) |
| 10 - 30 V DC  | E57-12GS02-DBB  | M12 x 1 | 69 (2.72) | 16 (0.63) | 42 (1.66) | -         |
|               | E57-12GU04-DBB  | M12 x 1 | 68 (2.68) | 16 (0.63) | 34 (1.34) | 8 (0.31)  |
|               | E57-12GE08-DBB  | M12 x 1 | 68 (2.68) | 16 (0.63) | 34 (1.34) | 8 (0.31)  |
|               | E57-12GE08-D1DB | M12 x 1 | 68 (2.68) | 10 (0.39) | 50 (1.97) | 8 (0.31)  |
|               | E57-18GS05-DBB  | M18 x 1 | 76 (2.99) | 15 (0.59) | 61 (2.40) | -         |
|               | E57-18GU08-DBB  | M18 x 1 | 80 (3.15) | 15 (0.59) | 49 (1.93) | 12 (0.47) |
|               | E57-18GE16-DBB  | M18 x 1 | 79 (3.11) | 15 (0.59) | 52 (2.05) | 12 (0.47) |
|               | E57-18GE16-D1DB | M18 x 1 | 79 (3.11) | 15 (0.59) | 52 (2.05) | 12 (0.47) |
|               | E57-30GS10-DBB  | M30     | 75 (2.95) | 15 (0.59) | 60 (2.36) | -         |
|               | E57-30GU15-DBB  | M30     | 79 (3.11) | 15 (0.59) | 45 (1.77) | 15 (0.59) |
|               | E57-30GE25-DBB  | M30     | 78 (3.07) | 15 (0.59) | 48 (1.89) | 15 (0.59) |
|               | E57-30GE25-D1DB | M30     | 78 (3.07) | 15 (0.59) | 48 (1.89) | 15 (0.59) |

| 3            | Typ            | a       | b           | c           | d         | e          |
|--------------|----------------|---------|-------------|-------------|-----------|------------|
|              |                |         |             |             |           |            |
| 10 - 30 V DC | E57-08GE03-CDB | M8 x 1  | 71 (2.80)   | 26 (1.02)   | 36 (1.42) | -          |
|              | E57-08GE03-CNB | M8 x 1  | 61 (2.40)   | 19 (0.75)   | 42 (1.66) | -          |
|              | E57-08GE03-GDB | M8 x 1  | 71 (2.80)   | 26 (1.02)   | 35 (1.38) | -          |
|              | E57-08GE03-GNB | M8 x 1  | 61 (2.40)   | 19 (0.75)   | 42 (1.66) | -          |
|              | E57-08GE06-CDB | M8 x 1  | 71 (2.80)   | 25 (0.98)   | 31 (1.22) | 4 (0.16)   |
|              | E57-08GE06-GDB | M8 x 1  | 71 (2.80)   | 25 (0.98)   | 31 (1.22) | 4 (0.16)   |
|              | E57-08GS01-CDB | M8 x 1  | 70 (2.76)   | 21 (0.83)   | 49 (1.93) | -          |
|              | E57-08GS01-GDB | M8 x 1  | 70 (2.76)   | 21 (0.83)   | 49 (1.93) | -          |
|              | E57-08GU02-CDB | M8 x 1  | 70 (2.76)   | 21 (0.83)   | 45 (1.77) | 4 (0.16)   |
|              | E57-08GU02-GDB | M8 x 1  | 70 (2.76)   | 21 (0.83)   | 45 (1.77) | 4 (0.16)   |
|              | E57-12GE05-CDB | M12 x 1 | 69 (2.72)   | 24 (0.94)   | 45 (1.77) | -          |
|              | E57-12GE05-GDB | M12 x 1 | 69 (2.72)   | 24 (0.94)   | 45 (1.77) | -          |
|              | E57-12GE10-CDB | M12 x 1 | 68.5 (2.70) | 10.3 (0.41) | 36 (1.42) | 7.8 (0.31) |
|              | E57-12GE10-GDB | M12 x 1 | 68.5 (2.70) | 10.3 (0.41) | 36 (1.42) | 7.8 (0.31) |
|              | E57-12GS02-CDB | M12 x 1 | 68 (2.68)   | 16 (0.63)   | 52 (2.05) | -          |
|              | E57-12GS02-GDB | M12 x 1 | 68 (2.68)   | 16 (0.63)   | 52 (2.05) | -          |
|              | E57-12GU04-CDB | M12 x 1 | 68 (2.68)   | 20 (0.79)   | 31 (1.22) | 8 (0.31)   |
|              | E57-12GU04-GDB | M12 x 1 | 68 (2.68)   | 20 (0.79)   | 31 (1.22) | 8 (0.31)   |
|              | E57-18GE08-CDB | M18 x 1 | 80 (3.15)   | 6 (0.24)    | 49 (1.93) | -          |
|              | E57-18GE08-GDB | M18 x 1 | 80 (3.15)   | 16 (0.63)   | 49 (1.93) | -          |
|              | E57-18GE18-CDB | M18 x 1 | 79 (3.11)   | 6 (0.24)    | 37 (1.46) | 12 (0.47)  |
|              | E57-18GE18-GDB | M18 x 1 | 79 (3.11)   | 6 (0.24)    | 37 (1.46) | 12 (0.47)  |
|              | E57-18GS05-CDB | M18 x 1 | 76 (2.99)   | 15 (0.59)   | 61 (2.40) | -          |
|              | E57-18GS05-GDB | M18 x 1 | 76 (2.99)   | 15 (0.59)   | 61 (2.40) | -          |
|              | E57-18GU08-CDB | M18 x 1 | 76 (2.99)   | 15 (0.59)   | 49 (1.93) | 12 (0.47)  |
|              | E57-18GU08-GDB | M18 x 1 | 80 (3.15)   | 15 (0.59)   | 49 (1.93) | 12 (0.47)  |
|              | E57-30GS10-CDB | M30     | 79 (3.11)   | 15 (0.59)   | 60 (2.36) | -          |
|              | E57-30GS10-GDB | M30     | 75 (2.95)   | 15 (0.59)   | 60 (2.36) | -          |
|              | E57-30GE15-CDB | M30     | 80 (3.15)   | 16 (0.63)   | 49 (1.93) | -          |
|              | E57-30GE15-GDB | M30     | 80 (3.15)   | 16 (0.63)   | 49 (1.93) | -          |
|              | E57-30GE29-CDB | M30     | 95 (3.74)   | 16 (0.63)   | 49 (1.93) | 15 (0.59)  |
|              | E57-30GE29-GDB | M30     | 95 (3.74)   | 16 (0.63)   | 49 (1.93) | 15 (0.59)  |
|              | E57-30GU15-CDB | M30     | 75 (2.95)   | 15 (0.59)   | 45 (1.77) | 15 (0.59)  |
|              | E57-30GU15-GDB | M30     | 75 (2.95)   | 15 (0.59)   | 45 (1.77) | 15 (0.59)  |

WWW.TM2A.PT info@tm2a.pt

WWW.TM2A.PT info@tm2a.pt



## Description



① Measuring head angled 90° for difficult measuring tasks



### Short Description

Eaton's inductive proximity sensors of the Premium+ series feature an enhanced measuring performance, durability and selection. Unlike the standard sensors, the Premium+ models feature a rugged stainless steel enclosure, impact-resistant front caps and an impact-absorbing sealant. The sensors are available in versions for AC, AC/DC and DC-only operation, with enclosure diameters of 12, 18 and 30 mm. Their interference immunity is unsurpassed at more than 20 volts/meter. The Premium+ series includes sensors with a specially short, cylindrical enclosure. Despite their small size, they feature the same measuring range as the longer standard sizes. This allows the sensors to be used in applications where mounting space is limited. All sensors are equipped with a LED with 360° visibility.






### Product Features

- New, wider product range – models with two-wire, three-wire, AC, DC and AC/DC connection.
- Resistant against mechanical and environmental strain.
- Designed with stainless steel barrel and new potting compound for robust, high temperature, high pressure washdown, as well as intense shock and vibration applications.
- Unmatched high noise immunity eliminates problems associated with electrical noise (all models > 20 Volt/Meter).
- Output status lamp is visible through 360° from any direction and at all light conditions.
- AC/DC and DC models have resettable short-circuit and polarity reversal protection.
- Models with 90° measuring head offer unique problem-solving capabilities.
- Large temperature range (-25 to 70 °C).
- Small sizes for space-saving installation available.
- Versions with cable for hard wiring or M12 plug connector for fast installation and simple replacement.

### Approvals



Ordering

| Rated switching distance<br>$S_n$<br>mm   | Type of mounting | Switching type | For connection of: | Contact configuration<br>N/O = normally open contact<br>N/C = normally closed contact | Part no. | Article no.                       | Price<br>see price list | Std. pack   |
|---|------------------|----------------|--------------------|---|----------|-----------------------------------|-------------------------|---|
| <b>E57 Premium Plus</b>   |                  |                |                    |   |          |                                   |                         |   |
| 2-wire, Stainless steel Rated operational voltage $U_e$ 20 - 250 V AC               |                  |                |                    |   |          |                                   |                         |   |
| M12 x 1   |                  |                |                    |   |          |                                   |                         |   |
|    | 2                | Flush          | -                  | 2 m connection cable  | 1 N/O    | <b>E57LAL12A2</b> <sup>1)</sup>   | 135995                  | 1 off  |
|   |                  |                | -                  | Plug-in connection M12 x 1  | 1 N/O    | <b>E57LAL12A2SA</b> <sup>1)</sup> | 135998                  |   |
|   |                  |                | -                  | 2 m connection cable  | 1 NC     | <b>E57LBL12A2</b> <sup>1)</sup>   | 136030                  |   |
|   |                  |                | -                  | Plug-in connection M12 x 1  | 1 NC     | <b>E57LBL12A2SA</b> <sup>1)</sup> | 136033                  |   |
|   | 4                | Non-flush      | -                  | 2 m connection cable  | 1 N/O    | <b>E57LAL12A2E</b> <sup>1)</sup>  | 135996                  |   |
|   |                  |                | -                  | Plug-in connection M12 x 1  | 1 N/O    | <b>E57LAL12A2EA</b> <sup>1)</sup> | 135997                  |   |
|   |                  |                | -                  | 2 m connection cable  | 1 NC     | <b>E57LBL12A2E</b> <sup>1)</sup>  | 136031                  |   |
|   |                  |                | -                  | Plug-in connection M12 x 1  | 1 NC     | <b>E57LBL12A2EA</b> <sup>1)</sup> | 136032                  |   |
| M18 x 1   |                  |                |                    |   |          |                                   |                         |   |
|    | 5                | Flush          | -                  | 2 m connection cable  | 1 N/O    | <b>E57LAL18A2</b> <sup>1)</sup>   | 136007                  |   |
|   |                  |                | -                  | 2 m connection cable  | 1 NC     | <b>E57LBL18A2</b> <sup>1)</sup>   | 136042                  |   |
|   |                  |                | -                  | Plug-in connection M12 x 1  | 1 NC     | <b>E57LBL18A2SA</b> <sup>1)</sup> | 136045                  |   |
|   |                  |                | -                  | 2 m connection cable  | 1 N/O    | <b>E57RAL18A2</b> <sup>2)</sup>   | 136066                  |   |
|   | 8                | Non-flush      | -                  | 2 m connection cable  | 1 NC     | <b>E57RBL18A2</b> <sup>2)</sup>   | 136078                  |   |
|   |                  |                | -                  | Plug-in connection M12 x 1  | 1 N/O    | <b>E57RAL18A2SA</b> <sup>2)</sup> | 136069                  |   |
|   |                  |                | -                  | Plug-in connection M12 x 1  | 1 NC     | <b>E57RBL18A2SA</b> <sup>2)</sup> | 136081                  |   |
|   |                  |                | -                  | 2 m connection cable  | 1 N/O    | <b>E57LAL18A2E</b> <sup>1)</sup>  | 136008                  |   |
|  | 8                | Non-flush      | -                  | Plug-in connection M12 x 1  | 1 N/O    | <b>E57LAL18A2EA</b> <sup>1)</sup> | 136009                  |   |
|   |                  |                | -                  | 2 m connection cable  | 1 NC     | <b>E57LBL18A2E</b> <sup>1)</sup>  | 136043                  |   |
|   |                  |                | -                  | Plug-in connection M12 x 1  | 1 NC     | <b>E57LBL18A2EA</b> <sup>1)</sup> | 136044                  |   |
|   |                  |                | -                  | Plug-in connection M12 x 1  | 1 N/O    | <b>E57RAL18A2EA</b> <sup>2)</sup> | 136068                  |   |
|   | 15               | Non-flush      | -                  | Plug-in connection M12 x 1  | 1 NC     | <b>E57RBL18A2EA</b> <sup>2)</sup> | 136080                  |   |
|   |                  |                | -                  | 2 m connection cable  | 1 N/O    | <b>E57RAL18A2E</b> <sup>2)</sup>  | 136067                  |   |
|   |                  |                | -                  | 2 m connection cable  | 1 NC     | <b>E57RBL18A2E</b> <sup>2)</sup>  | 136079                  |   |
|   |                  |                | M30 x 1.5          |   |          |                                   |                         |   |
|  | 10               | Flush          | -                  | 2 m connection cable  | 1 N/O    | <b>E57LAL30A2</b> <sup>1)</sup>   | 136018                  |   |
|   |                  |                | -                  | Plug-in connection M12 x 1  | 1 N/O    | <b>E57LAL30A2SA</b> <sup>1)</sup> | 136021                  |   |
|   |                  |                | -                  | 2 m connection cable  | 1 NC     | <b>E57LBL30A2</b> <sup>1)</sup>   | 136054                  |   |
|   |                  |                | -                  | Plug-in connection M12 x 1  | 1 NC     | <b>E57LBL30A2SA</b> <sup>1)</sup> | 136057                  |   |
|   | 15               | Non-flush      | -                  | 2 m connection cable  | 1 N/O    | <b>E57LAL30A2E</b> <sup>1)</sup>  | 136019                  |   |
|   |                  |                | -                  | Plug-in connection M12 x 1  | 1 N/O    | <b>E57LAL30A2EA</b> <sup>1)</sup> | 136020                  |   |
|   |                  |                | -                  | 2 m connection cable  | 1 NC     | <b>E57LBL30A2E</b> <sup>1)</sup>  | 136055                  |   |
|   |                  |                | -                  | Plug-in connection M12 x 1  | 1 NC     | <b>E57LBL30A2EA</b> <sup>1)</sup> | 136056                  |   |




WWW.TM2A.PT info@tm2a.pt

WWW.TM2A.PT info@tm2a.pt

Information relevant for export to North America



- |                      |   |
|----------------------|---|
| 1) Product Standards | UL 508; CSA-C22.2 No. 14; IEC60947-5-2; CE marking  |
| UL File No.          | E166051   |
| UL CCN               | NRKH, NRKH7   |
| CSA File No.         | 50513   |
| CSA Class No.        | 3211-03   |
| NA Certification     | UL listed, CSA certified                            |
| Max. Voltage Rating  | 250 V AC  |
| Degree of Protection | IEC: IP67, IP69K; UL/CSA Type: 4, 4x, 6, 6P, 12, 13 |
| 2) Product Standards | UL 508; IEC60947-5-2; CE marking                    |
| UL File No.          | E166051   |
| UL CCN               | NRKH, NRKH7   |
| NA Certification     | UL listed   |
| Max. Voltage Rating  | 250 V AC  |
| Degree of Protection | IEC: IP67, IP69K; UL/CSA Type: 4, 4x, 6, 6P, 12, 13 |

| Rated switching distance<br>$S_n$<br>mm   | Type of mounting | Switching type | For connection of:         | Contact configuration<br>N/O = normally open contact<br>N/C = normally closed contact | Part no.              | Article no.                        | Price<br>see price list | Std. pack   |
|---|------------------|----------------|----------------------------|---|-----------------------|------------------------------------|-------------------------|---|
| <b>E57 Premium Plus</b>   |                  |                |                            |   |                       |                                    |                         |   |
| 3-wire, Stainless steel Rated operational voltage $U_o$ 6 - 48 V DC               |                  |                |                            |   |                       |                                    |                         |   |
| M12 x 1   |                  |                |                            |   |                       |                                    |                         |   |
|  | 2                | Flush          | NPN                        | 2 m connection cable  | 1 N/O                 | <b>E57LAL12T110<sup>2)</sup></b>   | 135999                  | 1 off   |
|   |                  |                |                            | Plug-in connection M12 x 1  | 1 N/O                 | <b>E57LAL12T110SD<sup>2)</sup></b> | 136002                  |   |
|   |                  |                |                            | 2 m connection cable  | 1 NC                  | <b>E57LBL12T110<sup>2)</sup></b>   | 136034                  |   |
|   |                  |                |                            | Plug-in connection M12 x 1  | 1 NC                  | <b>E57LBL12T110SD<sup>2)</sup></b> | 136037                  |   |
|   |                  |                | PNP                        | 2 m connection cable  | 1 N/O                 | <b>E57LAL12T111<sup>2)</sup></b>   | 136003                  |   |
|   |                  |                |                            | Plug-in connection M12 x 1  | 1 N/O                 | <b>E57LAL12T111SD<sup>2)</sup></b> | 136006                  |   |
|   |                  |                |                            | 2 m connection cable  | 1 NC                  | <b>E57LBL12T111<sup>2)</sup></b>   | 136038                  |   |
|   |                  |                |                            | Plug-in connection M12 x 1  | 1 NC                  | <b>E57LBL12T111SD<sup>2)</sup></b> | 136041                  |   |
|   | 4                | Non-flush      | NPN                        | 2 m connection cable  | 1 N/O                 | <b>E57LAL12T110E<sup>2)</sup></b>  | 136000                  |   |
|   |                  |                |                            | Plug-in connection M12 x 1  | 1 N/O                 | <b>E57LAL12T110ED<sup>2)</sup></b> | 136001                  |   |
|   |                  |                |                            | 2 m connection cable  | 1 NC                  | <b>E57LBL12T110E<sup>2)</sup></b>  | 136035                  |   |
|   |                  |                |                            | Plug-in connection M12 x 1  | 1 NC                  | <b>E57LBL12T110ED<sup>2)</sup></b> | 136036                  |   |
|   |                  |                | PNP                        | 2 m connection cable  | 1 N/O                 | <b>E57LAL12T111E<sup>2)</sup></b>  | 136004                  |   |
|   |                  |                |                            | Plug-in connection M12 x 1  | 1 N/O                 | <b>E57LAL12T111ED<sup>2)</sup></b> | 136005                  |   |
|   |                  |                |                            | 2 m connection cable  | 1 NC                  | <b>E57LBL12T111E<sup>2)</sup></b>  | 136039                  |   |
|   |                  |                |                            | Plug-in connection M12 x 1  | 1 NC                  | <b>E57LBL12T111ED<sup>2)</sup></b> | 136040                  |   |
| 6   | Semi-flush       | PNP            | 2 m connection cable       | 1 N/O   | <b>E57-12LE06-B</b>   | 135896                             |                         |   |
|   |                  |                | 2 m connection cable       | 1 NC  | <b>E57-12LE06-B1</b>  | 135897                             |                         |   |
|   |                  |                | Plug-in connection M12 x 1 | 1 NC  | <b>E57-12LE06-B1D</b> | 135898                             |                         |   |
|   |                  |                | Plug-in connection M12 x 1 | 1 N/O   | <b>E57-12LE06-BD</b>  | 135899                             |                         |   |
|   |                  | NPN            | 2 m connection cable       | 1 N/O   | <b>E57-12LE06-C</b>   | 135900                             |                         |   |
|   |                  |                | 2 m connection cable       | 1 NC  | <b>E57-12LE06-C1</b>  | 135901                             |                         |   |
|   |                  |                | Plug-in connection M12 x 1 | 1 NC  | <b>E57-12LE06-C1D</b> | 135902                             |                         |   |
|   |                  |                | Plug-in connection M12 x 1 | 1 N/O   | <b>E57-12LE06-CD</b>  | 135903                             |                         |   |
| 10  | Semi-flush       | PNP            | 2 m connection cable       | 1 N/O   | <b>E57-12LE10-B</b>   | 135904                             |                         |   |
|   |                  |                | 2 m connection cable       | 1 NC  | <b>E57-12LE10-B1</b>  | 135905                             |                         |   |
|   |                  |                | Plug-in connection M12 x 1 | 1 NC  | <b>E57-12LE10-B1D</b> | 135906                             |                         |   |
|   |                  |                | Plug-in connection M12 x 1 | 1 N/O   | <b>E57-12LE10-BD</b>  | 135907                             |                         |   |
|   |                  | NPN            | 2 m connection cable       | 1 N/O   | <b>E57-12LE10-C</b>   | 135908                             |                         |   |
|   |                  |                | 2 m connection cable       | 1 NC  | <b>E57-12LE10-C1</b>  | 135909                             |                         |   |
|   |                  |                | Plug-in connection M12 x 1 | 1 NC  | <b>E57-12LE10-C1D</b> | 135910                             |                         |   |
|   |                  |                | Plug-in connection M12 x 1 | 1 N/O   | <b>E57-12LE10-CD</b>  | 135911                             |                         |   |







Information relevant for export to North America



|                                 |   |
|---------------------------------|---|
| <sup>2)</sup> Product Standards | UL 508; CSA-C22.2 No. 14; IEC60947-5-2; CE marking  |
| UL File No.                     | E166051   |
| UL CCN                          | NRKH, NRKH7   |
| CSA File No.                    | 50513   |
| CSA Class No.                   | 3211-03   |
| NA Certification                | UL listed, CSA certified                            |
| Max. Voltage Rating             | 48 V DC   |
| Degree of Protection            | IEC: IP67, IP69K; UL/CSA Type: 4, 4x, 6, 6P, 12, 13 |

WWW.TM2A.PT info@tm2a.pt

WWW.TM2A.PT info@tm2a.pt

| Rated switching distance<br>S <sub>n</sub><br>mm                                    | Type of mounting | Switching type | For connection of: | Contact configuration<br>N/O = normally open contact<br>N/C = normally closed contact | Part no. | Article no.                         | Price<br>see price list | Std. pack   |
|---|------------------|----------------|--------------------|---|----------|-------------------------------------|-------------------------|---|
| <b>E57 Premium Plus</b>   |                  |                |                    |   |          |                                     |                         |   |
| 3-wire, Stainless steel Rated operational voltage U <sub>o</sub> 6 - 48 V DC        |                  |                |                    |   |          |                                     |                         |   |
| M18 x 1   |                  |                |                    |   |          |                                     |                         |   |
|    | 5                | Flush          | NPN                | 2 m connection cable  | 1 N/O    | <b>E57LAL18T110</b> <sup>2)</sup>   | 136010                  | 1 off   |
|   |                  |                |                    | Plug-in connection M12 x 1  | 1 N/O    | <b>E57LAL18T110SD</b> <sup>2)</sup> | 136013                  |   |
|   |                  |                |                    | 2 m connection cable  | 1 NC     | <b>E57LBL18T110</b> <sup>2)</sup>   | 136046                  |   |
|   |                  |                |                    | Plug-in connection M12 x 1  | 1 NC     | <b>E57LBL18T110SD</b> <sup>2)</sup> | 136049                  |   |
|   |                  |                | PNP                | 2 m connection cable  | 1 N/O    | <b>E57LAL18T111</b> <sup>2)</sup>   | 136014                  |   |
|   |                  |                |                    | Plug-in connection M12 x 1  | 1 N/O    | <b>E57LAL18T111SD</b> <sup>2)</sup> | 136017                  |   |
|   |                  |                |                    | 2 m connection cable  | 1 NC     | <b>E57LBL18T111</b> <sup>2)</sup>   | 136050                  |   |
|   |                  |                |                    | Plug-in connection M12 x 1  | 1 NC     | <b>E57LBL18T111SD</b> <sup>2)</sup> | 136053                  |   |
|    | 5                | Flush          | NPN                | 2 m connection cable  | 1 N/O    | <b>E57RAL18T110</b> <sup>1)</sup>   | 136070                  |   |
|   |                  |                |                    | Plug-in connection M12 x 1  | 1 N/O    | <b>E57RAL18T110SD</b> <sup>1)</sup> | 136073                  |   |
|   |                  |                |                    | 2 m connection cable  | 1 NC     | <b>E57RBL18T110</b> <sup>1)</sup>   | 136082                  |   |
|   |                  |                |                    | Plug-in connection M12 x 1  | 1 NC     | <b>E57RBL18T110SD</b> <sup>1)</sup> | 136085                  |   |
|   |                  |                | PNP                | 2 m connection cable  | 1 N/O    | <b>E57RAL18T111</b> <sup>1)</sup>   | 136074                  |   |
|   |                  |                |                    | Plug-in connection M12 x 1  | 1 N/O    | <b>E57RAL18T111SD</b> <sup>1)</sup> | 136077                  |   |
|   |                  |                |                    | 2 m connection cable  | 1 NC     | <b>E57RBL18T111</b> <sup>1)</sup>   | 136086                  |   |
|   |                  |                |                    | Plug-in connection M12 x 1  | 1 NC     | <b>E57RBL18T111SD</b> <sup>1)</sup> | 136089                  |   |
|   | 8                | Non-flush      | NPN                | 2 m connection cable  | 1 N/O    | <b>E57LAL18T110E</b> <sup>2)</sup>  | 136011                  |   |
|   |                  |                |                    | Plug-in connection M12 x 1  | 1 N/O    | <b>E57LAL18T110ED</b> <sup>2)</sup> | 136012                  |   |
|   |                  |                |                    | 2 m connection cable  | 1 NC     | <b>E57LBL18T110E</b> <sup>2)</sup>  | 136047                  |   |
|   |                  |                |                    | Plug-in connection M12 x 1  | 1 NC     | <b>E57LBL18T110ED</b> <sup>2)</sup> | 136048                  |   |
|   |                  |                | PNP                | 2 m connection cable  | 1 N/O    | <b>E57LAL18T111E</b> <sup>2)</sup>  | 136015                  |   |
|   |                  |                |                    | Plug-in connection M12 x 1  | 1 N/O    | <b>E57LAL18T111ED</b> <sup>2)</sup> | 136016                  |   |
|   |                  |                |                    | 2 m connection cable  | 1 NC     | <b>E57LBL18T111E</b> <sup>2)</sup>  | 136051                  |   |
|   |                  |                |                    | Plug-in connection M12 x 1  | 1 NC     | <b>E57LBL18T111ED</b> <sup>2)</sup> | 136052                  |   |
|  | 8                | Non-flush      | NPN                | 2 m connection cable  | 1 N/O    | <b>E57RAL18T110E</b> <sup>1)</sup>  | 136071                  |   |
|   |                  |                |                    | Plug-in connection M12 x 1  | 1 N/O    | <b>E57RAL18T110ED</b> <sup>1)</sup> | 136072                  |   |
|   |                  |                |                    | 2 m connection cable  | 1 NC     | <b>E57RBL18T110E</b> <sup>1)</sup>  | 136083                  |   |
|   |                  |                |                    | Plug-in connection M12 x 1  | 1 NC     | <b>E57RBL18T110ED</b> <sup>1)</sup> | 136084                  |   |
|   |                  |                | PNP                | 2 m connection cable  | 1 N/O    | <b>E57RAL18T111E</b> <sup>1)</sup>  | 136075                  |   |
|   |                  |                |                    | Plug-in connection M12 x 1  | 1 N/O    | <b>E57RAL18T111ED</b> <sup>1)</sup> | 136076                  |   |
|   |                  |                |                    | 2 m connection cable  | 1 NC     | <b>E57RBL18T111E</b> <sup>1)</sup>  | 136087                  |   |
|   |                  |                |                    | Plug-in connection M12 x 1  | 1 NC     | <b>E57RBL18T111ED</b> <sup>1)</sup> | 136088                  |   |




WWW.TM2A.PT info@tm2a.pt

WWW.TM2A.PT info@tm2a.pt

**Information relevant for export to North America**



- 1) Product Standards: UL 508; IEC60947-5-2; CE marking
- UL File No.: E166051
- UL CCN: NRKH, NRKH7
- NA Certification: UL listed
- Max. Voltage Rating: 48 V DC
- Degree of Protection: IEC: IP67, IP69K; UL/CSA Type: 4, 4x, 6, 6P, 12, 13
- 2) Product Standards: UL 508; CSA-C22.2 No. 14; IEC60947-5-2; CE marking
- UL File No.: E166051
- UL CCN: NRKH, NRKH7
- CSA File No.: 50513
- CSA Class No.: 3211-03
- NA Certification: UL listed, CSA certified
- Max. Voltage Rating: 48 V DC
- Degree of Protection: IEC: IP67, IP69K; UL/CSA Type: 4, 4x, 6, 6P, 12, 13









| Rated switching distance<br>$S_n$<br>mm  | Type of mounting           | Switching type             | For connection of:         | Contact configuration<br>N/O = normally open contact<br>N/C = normally closed contact | Part no.                            | Article no.                         | Price<br>see price list | Std. pack  |
|--|----------------------------|----------------------------|----------------------------|---|-------------------------------------|-------------------------------------|-------------------------|--|
| <b>E57 Premium Plus</b>  |                            |                            |                            |   |                                     |                                     |                         |  |
| 3-wire, Stainless steel Rated operational voltage $U_o$ 6 - 48 V DC                |                            |                            |                            |   |                                     |                                     |                         |  |
| M18 x 1  |                            |                            |                            |   |                                     |                                     |                         |  |
|   | 12                         | Semi-flush                 | PNP                        | 2 m connection cable  | 1 N/O                               | <b>E57-18LE12-B</b>                 | 135941                  | 1 off  |
|  |                            |                            |                            | 2 m connection cable  | 1 NC                                | <b>E57-18LE12-B1</b>                | 135942                  |  |
|  |                            |                            |                            | Plug-in connection M12 x 1  | 1 NC                                | <b>E57-18LE12-B1D</b>               | 135943                  |  |
|  |                            |                            |                            | Plug-in connection M12 x 1  | 1 N/O                               | <b>E57-18LE12-BD</b>                | 135944                  |  |
|  |                            | NPN                        | 2 m connection cable       | 1 N/O   | <b>E57-18LE12-C</b>                 | 135945                              |                         |  |
|  |                            |                            | 2 m connection cable       | 1 NC  | <b>E57-18LE12-C1</b>                | 135946                              |                         |  |
|  |                            |                            | Plug-in connection M12 x 1 | 1 NC  | <b>E57-18LE12-C1D</b>               | 135947                              |                         |  |
|  |                            |                            | Plug-in connection M12 x 1 | 1 N/O   | <b>E57-18LE12-CD</b>                | 135948                              |                         |  |
|  | 20                         | Semi-flush                 | PNP                        | 2 m connection cable  | 1 N/O                               | <b>E57-18LE20-B</b>                 | 135949                  |  |
|  |                            |                            |                            | 2 m connection cable  | 1 NC                                | <b>E57-18LE20-B1</b>                | 135950                  |  |
|  |                            |                            |                            | Plug-in connection M12 x 1  | 1 NC                                | <b>E57-18LE20-B1D</b>               | 135951                  |  |
|  |                            |                            |                            | Plug-in connection M12 x 1  | 1 N/O                               | <b>E57-18LE20-BD</b>                | 135952                  |  |
| NPN  |                            | 2 m connection cable       | 1 N/O                      | <b>E57-18LE20-C</b>   | 135953                              |                                     |                         |  |
|  |                            | 2 m connection cable       | 1 NC                       | <b>E57-18LE20-C1</b>  | 135954                              |                                     |                         |  |
|  |                            | Plug-in connection M12 x 1 | 1 NC                       | <b>E57-18LE20-C1D</b>   | 135955                              |                                     |                         |  |
|  |                            | Plug-in connection M12 x 1 | 1 N/O                      | <b>E57-18LE20-CD</b>  | 135956                              |                                     |                         |  |
| M30 x 1.5  |                            |                            |                            |   |                                     |                                     |                         |  |
|  | 15                         | Flush                      | NPN                        | 2 m connection cable  | 1 N/O                               | <b>E57LAL30T110</b> <sup>2)</sup>   | 136022                  | 1 off  |
|  |                            |                            |                            | Plug-in connection M12 x 1  | 1 N/O                               | <b>E57LAL30T110SD</b> <sup>2)</sup> | 136025                  |  |
|  |                            |                            |                            | 2 m connection cable  | 1 NC                                | <b>E57LBL30T110</b> <sup>2)</sup>   | 136058                  |  |
|  |                            |                            | Plug-in connection M12 x 1 | 1 NC  | <b>E57LBL30T110SD</b> <sup>2)</sup> | 136061                              |                         |  |
|  |                            |                            | PNP                        | 2 m connection cable  | 1 N/O                               | <b>E57LAL30T111</b> <sup>2)</sup>   | 136026                  |  |
|  |                            |                            |                            | Plug-in connection M12 x 1  | 1 N/O                               | <b>E57LAL30T111SD</b> <sup>2)</sup> | 136029                  |  |
|  |                            | 2 m connection cable       |                            | 1 NC  | <b>E57LBL30T111</b> <sup>2)</sup>   | 136062                              |                         |  |
|  |                            | Non-flush                  | NPN                        | 2 m connection cable  | 1 N/O                               | <b>E57LAL30T110E</b> <sup>2)</sup>  | 136023                  |  |
|  |                            |                            |                            | Plug-in connection M12 x 1  | 1 N/O                               | <b>E57LAL30T110ED</b> <sup>2)</sup> | 136024                  |  |
|  |                            |                            |                            | 2 m connection cable  | 1 NC                                | <b>E57LBL30T110E</b> <sup>2)</sup>  | 136059                  |  |
|  |                            |                            | Plug-in connection M12 x 1 | 1 NC  | <b>E57LBL30T110ED</b> <sup>2)</sup> | 136060                              |                         |  |
|  |                            |                            | PNP                        | 2 m connection cable  | 1 N/O                               | <b>E57LAL30T111E</b> <sup>2)</sup>  | 136027                  |  |
|  | Plug-in connection M12 x 1 |                            |                            | 1 N/O   | <b>E57LAL30T111ED</b> <sup>2)</sup> | 136028                              |                         |  |
|  | 2 m connection cable       | 1 NC                       |                            | <b>E57LBL30T111E</b> <sup>2)</sup>  | 136063                              |                                     |                         |  |
|  | 22                         | Semi-flush                 | PNP                        | 2 m connection cable  | 1 N/O                               | <b>E57-30LE22-B</b>                 | 135987                  |  |
|  |                            |                            |                            | 2 m connection cable  | 1 NC                                | <b>E57-30LE22-B1</b>                | 135988                  |  |
|  |                            |                            |                            | Plug-in connection M12 x 1  | 1 NC                                | <b>E57-30LE22-B1D</b>               | 135989                  |  |
|  |                            |                            |                            | Plug-in connection M12 x 1  | 1 N/O                               | <b>E57-30LE22-BD</b>                | 135990                  |  |
|  |                            |                            | NPN                        | 2 m connection cable  | 1 N/O                               | <b>E57-30LE22-C</b>                 | 135991                  |  |
|  |                            |                            |                            | 2 m connection cable  | 1 NC                                | <b>E57-30LE22-C1</b>                | 135992                  |  |
| Plug-in connection M12 x 1   |                            |                            |                            | 1 NC  | <b>E57-30LE22-C1D</b>               | 135993                              |                         |  |
| Plug-in connection M12 x 1   |                            |                            |                            | 1 N/O   | <b>E57-30LE22-CD</b>                | 135994                              |                         |  |

## Information relevant for export to North America







|                                 |   |
|---------------------------------|---|
| <sup>2)</sup> Product Standards | UL 508; CSA-C22.2 No. 14; IEC60947-5-2; CE marking  |
| UL File No.                     | E166051   |
| UL CCN                          | NRKH, NRKH7   |
| CSA File No.                    | 50513   |
| CSA Class No.                   | 3211-03   |
| NA Certification                | UL listed, CSA certified                            |
| Max. Voltage Rating             | 48 V DC   |
| Degree of Protection            | IEC: IP67, IP69K; UL/CSA Type: 4, 4x, 6, 6P, 12, 13 |



|   | Rated switching distance<br>$S_n$<br>mm | Type of mounting | Switching type | For connection of:         | Contact configuration<br>N/O = normally open contact<br>N/C = normally closed contact | Part no.            | Article no. | Price see price list | Std. pack  |
|---|---|------------------|----------------|----------------------------|---|---------------------|-------------|----------------------|--|
| <b>E57-Premium-Plus-Short</b>   |   |                  |                |                            |   |                     |             |                      |  |
| 2-wire, Stainless steel   |   |                  |                |                            |   |                     |             |                      |  |
| Rated operational voltage $U_e$ 40 - 250 V AC, 20 - 250 V DC                        |   |                  |                |                            |   |                     |             |                      |  |
| M12 x 1   |   |                  |                |                            |   |                     |             |                      |  |
|    | 2                                       | Flush            | -              | 2 m connection cable       | 1 N/O   | <b>E57SAL12A2</b>   | 136090      |                      | 1 off<br>  |
|   |   |                  | -              | Plug-in connection M12 x 1 | 1 N/O   | <b>E57SAL12A2SA</b> | 136093      |                      |  |
|   |   |                  | -              | 2 m connection cable       | 1 NC  | <b>E57SBL12A2</b>   | 136138      |                      |  |
|   |   |                  | -              | Plug-in connection M12 x 1 | 1 NC  | <b>E57SBL12A2SA</b> | 136141      |                      |  |
|   | 4                                       | Non-flush        | -              | 2 m connection cable       | 1 N/O   | <b>E57SAL12A2E</b>  | 136091      |                      |  |
|   |   |                  | -              | Plug-in connection M12 x 1 | 1 N/O   | <b>E57SAL12A2EA</b> | 136092      |                      |  |
|   |   |                  | -              | 2 m connection cable       | 1 NC  | <b>E57SBL12A2E</b>  | 136139      |                      |  |
|   |   |                  | -              | Plug-in connection M12 x 1 | 1 NC  | <b>E57SBL12A2EA</b> | 136140      |                      |  |
| M18 x 1   |   |                  |                |                            |   |                     |             |                      |  |
|    | 5                                       | Flush            | -              | 2 m connection cable       | 1 N/O   | <b>E57SAL18A2</b>   | 136106      |                      |  |
|   |   |                  | -              | Plug-in connection M12 x 1 | 1 N/O   | <b>E57SAL18A2SA</b> | 136109      |                      |  |
|   |   |                  | -              | 2 m connection cable       | 1 NC  | <b>E57SBL18A2</b>   | 136152      |                      |  |
|   |   |                  | -              | Plug-in connection M12 x 1 | 1 NC  | <b>E57SBL18A2SA</b> | 136155      |                      |  |
|   | 8                                       | Non-flush        | -              | 2 m connection cable       | 1 N/O   | <b>E57SAL18A2E</b>  | 136107      |                      |  |
|   |   |                  | -              | Plug-in connection M12 x 1 | 1 N/O   | <b>E57SAL18A2EA</b> | 136108      |                      |  |
|   |   |                  | -              | 2 m connection cable       | 1 NC  | <b>E57SBL18A2E</b>  | 136153      |                      |  |
|   |   |                  | -              | Plug-in connection M12 x 1 | 1 NC  | <b>E57SBL18A2EA</b> | 136154      |                      |  |
| M30 x 1.5   |   |                  |                |                            |   |                     |             |                      |  |
|  | 10                                      | Flush            | -              | 2 m connection cable       | 1 N/O   | <b>E57SAL30A2</b>   | 136122      |                      |  |
|   |   |                  | -              | Plug-in connection M12 x 1 | 1 N/O   | <b>E57SAL30A2SA</b> | 136125      |                      |  |
|   |   |                  | -              | 2 m connection cable       | 1 NC  | <b>E57SBL30A2</b>   | 136168      |                      |  |
|   |   |                  | -              | Plug-in connection M12 x 1 | 1 NC  | <b>E57SBL30A2SA</b> | 136171      |                      |  |
|   | 15                                      | Non-flush        | -              | 2 m connection cable       | 1 N/O   | <b>E57SAL30A2E</b>  | 136123      |                      |  |
|   |   |                  | -              | Plug-in connection M12 x 1 | 1 N/O   | <b>E57SAL30A2EA</b> | 136124      |                      |  |
|   |   |                  | -              | 2 m connection cable       | 1 NC  | <b>E57SBL30A2E</b>  | 136169      |                      |  |
|   |   |                  | -              | Plug-in connection M12 x 1 | 1 NC  | <b>E57SBL30A2EA</b> | 136170      |                      |  |
| Rated operational voltage $U_e$ 40 - 250 V AC                                       |   |                  |                |                            |   |                     |             |                      |  |
| M12 x 1   |   |                  |                |                            |   |                     |             |                      |  |
|  | 2                                       | Flush            | -              | 2 m connection cable       | 1 N/O   | <b>E57SAL12A4</b>   | 136094      |                      |  |
|   |   |                  | -              | Plug-in connection M12 x 1 | 1 N/O   | <b>E57SAL12A4SA</b> | 136097      |                      |  |
|   |   |                  | -              | 2 m connection cable       | 1 NC  | <b>E57SBL12A4</b>   | 136142      |                      |  |
|   |   |                  | -              | Plug-in connection M12 x 1 | 1 NC  | <b>E57SBL12A4SA</b> | 136145      |                      |  |
|   | 4                                       | Non-flush        | -              | 2 m connection cable       | 1 N/O   | <b>E57SAL12A4E</b>  | 136095      |                      |  |
|   |   |                  | -              | Plug-in connection M12 x 1 | 1 N/O   | <b>E57SAL12A4EA</b> | 136096      |                      |  |
|   |   |                  | -              | 2 m connection cable       | 1 NC  | <b>E57SBL12A4E</b>  | 136143      |                      |  |
|   |   |                  | -              | Plug-in connection M12 x 1 | 1 NC  | <b>E57SBL12A4EA</b> | 136144      |                      |  |
| M18 x 1   |   |                  |                |                            |   |                     |             |                      |  |
|  | 5                                       | Flush            | -              | 2 m connection cable       | 1 N/O   | <b>E57SAL18A4</b>   | 136110      |                      |  |
|   |   |                  | -              | Plug-in connection M12 x 1 | 1 N/O   | <b>E57SAL18A4SA</b> | 136113      |                      |  |
|   |   |                  | -              | 2 m connection cable       | 1 NC  | <b>E57SBL18A4</b>   | 136156      |                      |  |
|   |   |                  | -              | Plug-in connection M12 x 1 | 1 NC  | <b>E57SBL18A4SA</b> | 136159      |                      |  |
|   | 8                                       | Non-flush        | -              | 2 m connection cable       | 1 N/O   | <b>E57SAL18A4E</b>  | 136111      |                      |  |
|   |   |                  | -              | Plug-in connection M12 x 1 | 1 N/O   | <b>E57SAL18A4EA</b> | 136112      |                      |  |
|   |   |                  | -              | 2 m connection cable       | 1 NC  | <b>E57SBL18A4E</b>  | 136157      |                      |  |
|   |   |                  | -              | Plug-in connection M12 x 1 | 1 NC  | <b>E57SBL18A4EA</b> | 136158      |                      |  |
| M30 x 1.5   |   |                  |                |                            |   |                     |             |                      |  |
|  | 10                                      | Flush            | -              | 2 m connection cable       | 1 N/O   | <b>E57SAL30A4</b>   | 136126      |                      |  |
|   |   |                  | -              | Plug-in connection M12 x 1 | 1 N/O   | <b>E57SAL30A4SA</b> | 136129      |                      |  |
|   |   |                  | -              | 2 m connection cable       | 1 NC  | <b>E57SBL30A4</b>   | 136172      |                      |  |
|   |   |                  | -              | Plug-in connection M12 x 1 | 1 NC  | <b>E57SBL30A4SA</b> | 136175      |                      |  |
|   | 15                                      | Non-flush        | -              | 2 m connection cable       | 1 N/O   | <b>E57SAL30A4E</b>  | 136127      |                      |  |
|   |   |                  | -              | Plug-in connection M12 x 1 | 1 N/O   | <b>E57SAL30A4EA</b> | 136128      |                      |  |
|   |   |                  | -              | 2 m connection cable       | 1 NC  | <b>E57SBL30A4E</b>  | 136173      |                      |  |
|   |   |                  | -              | Plug-in connection M12 x 1 | 1 NC  | <b>E57SBL30A4EA</b> | 136174      |                      |  |

WWW.TM2A.PT info@tm2a.pt

WWW.TM2A.PT info@tm2a.pt

| Rated switching distance<br>$S_n$<br>mm   | Type of mounting           | Switching type             | For connection of:    | Contact configuration<br>N/O = normally open contact<br>N/C = normally closed contact | Part no. | Article no.           | Price<br>see price list | Std. pack  |
|---|----------------------------|----------------------------|-----------------------|---|----------|-----------------------|-------------------------|--|
| <b>E57-Premium-Plus-Short</b>   |                            |                            |                       |   |          |                       |                         |  |
| 3-wire, Stainless steel   |                            |                            |                       |   |          |                       |                         |  |
| Rated operational voltage $U_e$ 6 - 48 V DC   |                            |                            |                       |   |          |                       |                         |  |
| M12 x 1   |                            |                            |                       |   |          |                       |                         |  |
|    | 2                          | Flush                      | NPN                   | 2 m connection cable  | 1 N/O    | <b>E57SAL12T110</b>   | 136098                  | 1 off<br> |
|   |                            |                            | NPN                   | Plug-in connection M12 x 1  | 1 N/O    | <b>E57SAL12T110SD</b> | 136101                  |  |
|   |                            |                            | PNP                   | 2 m connection cable  | 1 N/O    | <b>E57SAL12T111</b>   | 136102                  |  |
|   |                            |                            | PNP                   | Plug-in connection M12 x 1  | 1 N/O    | <b>E57SAL12T111SD</b> | 136105                  |  |
|   |                            |                            | PNP                   | 2 m connection cable  | 1 NC     | <b>E57SBL12T111</b>   | 136148                  |  |
|   |                            |                            | PNP                   | Plug-in connection M12 x 1  | 1 NC     | <b>E57SBL12T111SD</b> | 136151                  |  |
|   | 4                          | Non-flush                  | NPN                   | 2 m connection cable  | 1 N/O    | <b>E57SAL12T110E</b>  | 136099                  |  |
|   |                            |                            | NPN                   | Plug-in connection M12 x 1  | 1 N/O    | <b>E57SAL12T110ED</b> | 136100                  |  |
|   |                            |                            | PNP                   | 2 m connection cable  | 1 N/O    | <b>E57SAL12T111E</b>  | 136103                  |  |
|   |                            |                            | PNP                   | Plug-in connection M12 x 1  | 1 N/O    | <b>E57SAL12T111ED</b> | 136104                  |  |
|   |                            |                            | NPN                   | 2 m connection cable  | 1 NC     | <b>E57SBL12T110E</b>  | 136146                  |  |
|   |                            |                            | NPN                   | Plug-in connection M12 x 1  | 1 NC     | <b>E57SBL12T110ED</b> | 136147                  |  |
|   |                            |                            | PNP                   | 2 m connection cable  | 1 NC     | <b>E57SBL12T111E</b>  | 136149                  |  |
|   |                            |                            | PNP                   | Plug-in connection M12 x 1  | 1 NC     | <b>E57SBL12T111ED</b> | 136150                  |  |
| M18 x 1   |                            |                            |                       |   |          |                       |                         |  |
|    | 5                          | Flush                      | NPN                   | 2 m connection cable  | 1 N/O    | <b>E57SAL18T110</b>   | 136114                  |  |
|   |                            |                            | NPN                   | Plug-in connection M12 x 1  | 1 N/O    | <b>E57SAL18T110SD</b> | 136117                  |  |
|   |                            |                            | PNP                   | 2 m connection cable  | 1 N/O    | <b>E57SAL18T111</b>   | 136118                  |  |
|   |                            |                            | PNP                   | Plug-in connection M12 x 1  | 1 N/O    | <b>E57SAL18T111SD</b> | 136121                  |  |
|   |                            |                            | NPN                   | 2 m connection cable  | 1 NC     | <b>E57SBL18T110</b>   | 136160                  |  |
|   |                            |                            | NPN                   | Plug-in connection M12 x 1  | 1 NC     | <b>E57SBL18T110SD</b> | 136163                  |  |
|   |                            |                            | PNP                   | 2 m connection cable  | 1 NC     | <b>E57SBL18T111</b>   | 136164                  |  |
|   |                            |                            | PNP                   | Plug-in connection M12 x 1  | 1 NC     | <b>E57SBL18T111SD</b> | 136167                  |  |
|   | 5                          | Non-flush                  | NPN                   | 2 m connection cable  | 1 N/O    | <b>E57SAL18T110E</b>  | 136115                  |  |
|   |                            |                            | NPN                   | 2 m connection cable  | 1 NC     | <b>E57SBL18T110E</b>  | 136161                  |  |
|   |                            |                            | NPN                   | Plug-in connection M12 x 1  | 1 N/O    | <b>E57SAL18T110ED</b> | 136116                  |  |
|   |                            |                            | PNP                   | 2 m connection cable  | 1 N/O    | <b>E57SAL18T111E</b>  | 136119                  |  |
|   |                            |                            | PNP                   | Plug-in connection M12 x 1  | 1 N/O    | <b>E57SAL18T111ED</b> | 136120                  |  |
|   |                            |                            | NPN                   | Plug-in connection M12 x 1  | 1 NC     | <b>E57SBL18T110ED</b> | 136162                  |  |
| PNP   | 2 m connection cable       | 1 NC                       | <b>E57SBL18T111E</b>  | 136165  |          |                       |                         |  |
| PNP   | Plug-in connection M12 x 1 | 1 NC                       | <b>E57SBL18T111ED</b> | 136166  |          |                       |                         |  |
| M30 x 1.5   |                            |                            |                       |   |          |                       |                         |  |
|  | 15                         | Flush                      | NPN                   | 2 m connection cable  | 1 N/O    | <b>E57SAL30T110</b>   | 136130                  |  |
|   |                            |                            | NPN                   | Plug-in connection M12 x 1  | 1 N/O    | <b>E57SAL30T110SD</b> | 136133                  |  |
|   |                            |                            | PNP                   | 2 m connection cable  | 1 N/O    | <b>E57SAL30T111</b>   | 136134                  |  |
|   |                            |                            | PNP                   | Plug-in connection M12 x 1  | 1 N/O    | <b>E57SAL30T111SD</b> | 136137                  |  |
|   |                            |                            | NPN                   | 2 m connection cable  | 1 NC     | <b>E57SBL30T110</b>   | 136176                  |  |
|   |                            |                            | NPN                   | Plug-in connection M12 x 1  | 1 NC     | <b>E57SBL30T110SD</b> | 136179                  |  |
|   |                            |                            | PNP                   | 2 m connection cable  | 1 NC     | <b>E57SBL30T111</b>   | 136180                  |  |
|   |                            |                            | PNP                   | Plug-in connection M12 x 1  | 1 NC     | <b>E57SBL30T111SD</b> | 136183                  |  |
|   |                            |                            | 15                    | Non-flush   | NPN      | 2 m connection cable  | 1 N/O                   | <b>E57SAL30T110E</b>   |
|   | NPN                        | 2 m connection cable       |                       |   | 1 NC     | <b>E57SBL30T110E</b>  | 136177                  |  |
|   | NPN                        | Plug-in connection M12 x 1 |                       |   | 1 N/O    | <b>E57SAL30T110ED</b> | 136132                  |  |
|   | PNP                        | 2 m connection cable       |                       |   | 1 N/O    | <b>E57SAL30T111E</b>  | 136135                  |  |
|   | PNP                        | Plug-in connection M12 x 1 |                       |   | 1 N/O    | <b>E57SAL30T111ED</b> | 136136                  |  |
|   | NPN                        | Plug-in connection M12 x 1 |                       |   | 1 NC     | <b>E57SBL30T110ED</b> | 136178                  |  |
|   | PNP                        | 2 m connection cable       |                       |   | 1 NC     | <b>E57SBL30T111E</b>  | 136181                  |  |
|   | PNP                        | Plug-in connection M12 x 1 |                       |   | 1 NC     | <b>E57SBL30T111ED</b> | 136182                  |  |

Information relevant for export to North America



|                      |  |
|----------------------|--|
| Product Standards    | UL 508; CSA-C22.2 No. 14; IEC60947-5-2; CE marking |
| UL File No.          | E166051  |
| UL CCN               | NRKH, NRKH7  |
| CSA File No.         | 50513  |
| CSA Class No.        | 3211-03  |
| NA Certification     | UL listed, CSA certified                           |
| Max. Voltage Rating  | 250 V AC, 250 V DC                                 |
| Degree of Protection | IEC: IP67; UL/CSA Type: 4, 4x, 6, 6P, 12, 13       |

Engineering

Circuit diagram


Rated operational voltage  
2-Wire Sensors

AC/DC and AC sensors  
Example AC connection


Contact

N/O and NC

2 m connection cable





Plug-in connection M12 (front view plug)





AC/DC sensor  
Example DC current connection

N/O and NC (NPN)





N/O and NC (PNP)





3-Wire Sensors

6-48 V DC\_x



N/O (NPN)





N/O (PNP)



NC (NPN)



NC (PNP)



## Technical data

|                               |             |  |          | E57L...L12A...<br>E57L...L18A...<br>E57R...L18A...<br>E57L...L30A... | E57L...L12T...<br>E57L...L18T...<br>E57R...L18T...<br>E57L...L30T... | E57-12LE...<br>E57-18LE...<br>E57-30LE... |
|-------------------------------|-------------|--|----------|--|--|---|
| <b>General</b>                |             |  |          |  |  |   |
| Standards                     |             |  |          | IEC/EN 60947-5-2   | IEC/EN 60947-5-2   | IEC/EN 60947-5-2                          |
| Ambient temperature           |             |  | °C       | - 25 - + 70  | - 25 - + 70  | - 25 - + 70                               |
| Protection type               |             |  |          | IP67   | IP67   | IP67                                      |
| Mechanical shock resistance   |             |  | g        | 30<br>Shock duration 11 ms   | 30<br>Shock duration 11 ms   | 30<br>Shock duration 11 ms                |
| <b>Characteristics</b>        |             |  |          |  |  |   |
| Temperature drift of $S_n$    |             |  | %        | 10   | 10   | 10  |
| Switching hysteresis of $S_n$ |             |  | %        | 20   | 15   | 15  |
| Rated operational voltage     |             |  | $U_e$    | 20 - 250 V AC  | 6 - 48 V DC  | 6 - 48 V DC                               |
| Maximum load current          |             |  | $I_e$ mA | < 500 (25 °C) / 250 (70 °C)  | < 500 (6 - 30 V DC)  | < 500 (6 - 30 V DC)                       |
| Switching Frequency           |             |  |          |  |  |   |
|                               | ... L12A... |  | Hz       | 20   | 800  | 800                                       |
|                               | ... L18A... |  | Hz       | 20   | 500  | 500                                       |
|                               | ... L30A... |  | Hz       | 20   | 300  | 300                                       |
| Switching state display       |             |  | LED      | Red  | Red  | Red                                       |
| Connection                    |             |  |          | 2-wire   | 3-wire   | 3-wire                                    |
| Design (outer dimensions)     |             |  |          |  |  |   |
|                               | ... L12A... |  | mm       | M12 x 1  | M12 x 1  | M12 x 1                                   |
|                               | ... L18A... |  | mm       | M18 x 1  | M18 x 1  | M18 x 1                                   |
|                               | ... L30A... |  | mm       | M30 x 1.5  | M30 x 1.5  | M30 x 1                                   |
| Material                      |             |  |          | Stainless steel  | Stainless steel  | Stainless steel                           |


|                               |             |  |          | E57S...L12A2<br>E57S...L18A2<br>E57S...L30A2 | E57S...L12A4<br>E57S...L18A4<br>E57S...L30A4 | E57S...L12T...<br>E57S...L18T...<br>E57S...L30T... |
|-------------------------------|-------------|--|----------|--|--|--|
| <b>General</b>                |             |  |          |  |  |  |
| Standards                     |             |  |          | IEC/EN 60947-5-2                             | IEC/EN 60947-5-2                             | IEC/EN 60947-5-2                                   |
| Ambient temperature           |             |  | °C       | - 25 - + 70                                  | - 25 - + 70                                  | - 25 - + 70  |
| Protection type               |             |  |          | IP67   | IP67   | IP67   |
| Mechanical shock resistance   |             |  | g        | 30<br>Shock duration 11 ms                   | 30<br>Shock duration 11 ms                   | 30<br>Shock duration 11 ms                         |
| <b>Characteristics</b>        |             |  |          |  |  |  |
| Temperature drift of $S_n$    |             |  | %        | 10   | 10   | 10   |
| Switching hysteresis of $S_n$ |             |  | %        | 20   | 20   | 15   |
| Rated operational voltage     |             |  | $U_e$    | 40 - 250 V AC<br>20 - 250 V DC               | 40 - 250 V AC                                | 6 - 48 V DC  |
| Maximum load current          |             |  | $I_e$ mA | < 250 (25 °C) / 200 (70 °C)                  | < 500 (25 °C) / 250 (70 °C)                  | < 500 (6 - 32 V DC) /<br>250 (32 - 48 V DC)        |
| Switching Frequency           |             |  |          |  |  |  |
|                               | ... L12A... |  | Hz       | 60   | 20   | 800  |
|                               | ... L18A... |  | Hz       | 60   | 20   | 500  |
|                               | ... L30A... |  | Hz       | 60   | 20   | 300  |
| Switching state display       |             |  | LED      | Red  | Red  | Red  |
| Connection                    |             |  |          | 2-wire                                       | 2-wire                                       | 3-wire   |
| Design (outer dimensions)     |             |  |          |  |  |  |
|                               | ... L12A... |  | mm       | M12 x 1                                      | M12 x 1                                      | M12 x 1  |
|                               | ... L18A... |  | mm       | M18 x 1                                      | M18 x 1                                      | M18 x 1  |
|                               | ... L30A... |  | mm       | M30 x 1.5                                    | M30 x 1.5                                    | M30 x 1.5  |
| Material                      |             |  |          | Stainless steel                              | Stainless steel                              | Stainless steel                                    |

## Notes

Further technical data can be found in the Online Catalog at <http://de.ecat.moeller.net>


Dimensions

2 m connection cable

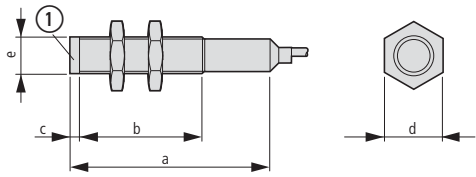

① Sensor surface

Plug-in connection M12 x 1

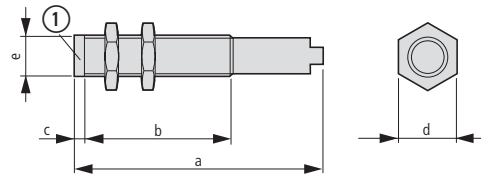

| 2         | a         | b         | c         | d         | e  |
|-----------|-----------|-----------|-----------|-----------|----|
| mm (inch) | mm (inch) | mm (inch) | mm (inch) | mm (inch) | mm |


| AC, 2 m connection cable |   |             |             |              |             |           |
|--------------------------|---|-------------|-------------|--------------|-------------|-----------|
| ∅ 12                     | ① | 62.4 (2.46) | 50.3 (1.98) | -            | 16.8 (0.67) | M12 x 1   |
|                          | ③ | 72.7 (2.87) | 50.3 (1.98) | 9.14 (0.36)  | 16.8 (0.67) | M12 x 1   |
| ∅ 18                     | ① | 64.5 (2.54) | 50.9 (2.00) | -            | 23.8 (0.94) | M18 x 1   |
|                          | ③ | 66.0 (2.60) | 37.2 (1.47) | 14.1 (0.56)  | 23.8 (0.94) | M18 x 1   |
| ∅ 30                     | ① | 69.3 (2.73) | 50.3 (1.98) | -            | 35.9 (1.41) | M30 x 1.5 |
|                          | ③ | 69.3 (2.73) | 37.8 (1.49) | 13.26 (0.52) | 35.9 (1.41) | M30 x 1.5 |

| AC, plug-in connection M12 |   |              |             |              |             |           |
|----------------------------|---|--------------|-------------|--------------|-------------|-----------|
| ∅ 12                       | ① | 68.4 (2.69)  | 50.3 (1.98) | -            | 16.8 (0.67) | M12 x 1   |
|                            | ③ | 77.7 (3.06)  | 50.3 (1.98) | 9.14 (0.36)  | 9.14 (0.36) | M12 x 1   |
| ∅ 18                       | ① | 69.06 (2.72) | 50.9 (2.00) | -            | 23.8 (0.94) | M18 x 1   |
|                            | ③ | 69.4 (2.74)  | 37.2 (1.47) | 14.1 (0.56)  | 23.8 (0.94) | M18 x 1   |
| ∅ 30                       | ① | 73.8 (2.91)  | 50.3 (1.98) | -            | 35.9 (1.41) | M30 x 1.5 |
|                            | ③ | 73.8 (2.91)  | 37.8 (1.49) | 13.26 (0.52) | 35.9 (1.41) | M30 x 1.5 |

| 3           | a_x         | b_x         | c_x         | d_x         | e_x  |
|-------------|-------------|-------------|-------------|-------------|------|
| mm (inch)_x | mm (inch)_x | mm (inch)_x | mm (inch)_x | mm (inch)_x | MM_x |

| DC, 2 m connection cable |   |             |             |              |             |           |
|--------------------------|---|-------------|-------------|--------------|-------------|-----------|
| ∅ 12                     | ① | 62.4 (2.46) | 50.3 (1.98) | -            | 16.8 (0.67) | _xM12 x 1 |
|                          | ② | 72.8 (2.87) | 57.9 (2.28) | 1.62 (0.06)  | 16.8 (0.67) | _xM12 x 1 |
|                          | ③ | 72.7 (2.87) | 50.3 (1.98) | 9.14 (0.36)  | 16.8 (0.67) | _xM12 x 1 |
| ∅ 18                     | ① | 64.5 (2.54) | 50.9 (2.00) | -            | 23.8 (0.94) | _xM18 x 1 |
|                          | ② | 66.1 (2.60) | 48.2 (1.90) | 2.54 (0.10)  | 23.8 (0.94) | _xM18 x 1 |
|                          | ③ | 66.0 (2.60) | 37.2 (1.47) | 14.1 (0.56)  | 23.8 (0.94) | _xM18 x 1 |
| ∅ 30                     | ① | 69.3 (2.73) | 50.3 (1.98) | -            | 35.9 (1.41) | M30 x 1.5 |
|                          | ② | 67.8 (2.67) | 48.2 (1.90) | 3.30 (0.13)  | 35.9 (1.41) | M30 x 1.5 |
|                          | ③ | 69.3 (2.73) | 37.8 (1.49) | 13.26 (0.52) | 35.9 (1.41) | M30 x 1.5 |

| DC, plug-in connection M12 |   |             |             |              |             |           |
|----------------------------|---|-------------|-------------|--------------|-------------|-----------|
| ∅ 12                       | ① | 68.7 (2.71) | 50.3 (1.98) | -            | 16.8 (0.67) | _xM12 x 1 |
|                            | ② | 77.2 (3.04) | 57.9 (2.28) | 1.62 (0.06)  | 16.8 (0.67) | _xM12 x 1 |
|                            | ③ | 77.7 (3.06) | 50.9 (1.98) | 9.14 (0.36)  | 16.8 (0.67) | _xM12 x 1 |
| ∅ 18                       | ① | 69.3 (2.73) | 50.9 (2.00) | -            | 23.8 (0.94) | _xM18 x 1 |
|                            | ② | 69.1 (2.72) | 48.2 (1.90) | 2.54 (0.10)  | 23.8 (0.94) | _xM18 x 1 |
|                            | ③ | 69.4 (2.74) | 37.2 (1.47) | 14.1 (0.56)  | 23.8 (0.94) | _xM18 x 1 |
| ∅ 30                       | ① | 74.1 (2.92) | 50.3 (1.98) | -            | 35.9 (1.41) | M30 x 1.5 |
|                            | ② | 70.6 (2.78) | 48.2 (1.90) | 3.30 (0.13)  | 35.9 (1.41) | M30 x 1.5 |
|                            | ③ | 74.1 (2.92) | 37.8 (1.49) | 13.26 (0.52) | 35.9 (1.41) | M30 x 1.5 |


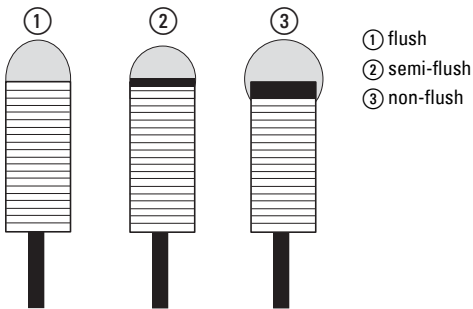


WWW.TM2A.PT info@tm2a.pt

WWW.TM2A.PT info@tm2a.pt




E57R...A2...  
E57R...110..  
E57R...111..

E57R...SA  
E57R...EA  
E57R...SD  
E57R...ED

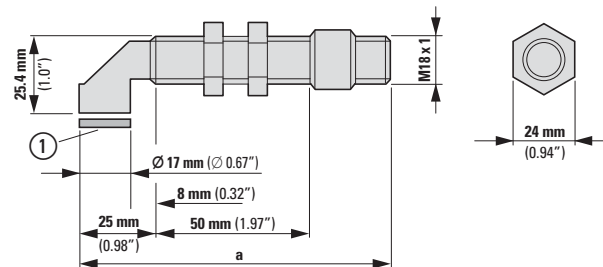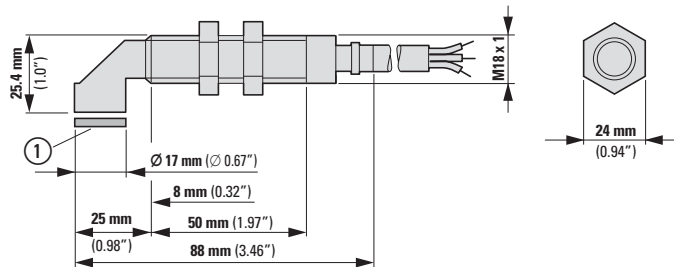


① Sensor surface





① Sensor surface


|  | a_x<br>mm (inch)_x | b_x<br>mm (inch)_x | c_x<br>mm (inch)_x | d_x<br>MM_x |
|---|--------------------|--------------------|--------------------|-------------|
|---|--------------------|--------------------|--------------------|-------------|

AC, 2 m connection cable

|      |   |             |              |              |           |
|------|---|-------------|--------------|--------------|-----------|
| ∅ 12 | ① | 51.7 (2.04) | 39.6 (1.56)  | 0.5 (0.02)   | _xM12 x 1 |
|      | ③ | 51.7 (2.04) | 35.1 (1.38)  | 5 (0.20)     | _xM12 x 1 |
| ∅ 18 | ① | 35.3 (1.39) | 0.86 (21.82) | 0.5 (0.02)   | _xM18 x 1 |
|      | ③ | 35.3 (1.39) | 15.32 (0.60) | 7 (0.28)     | _xM18 x 1 |
| ∅ 30 | ① | 40.2 (1.58) | 25.15 (0.99) | 0.8 (0.03)   | M30 x 1.5 |
|      | ③ | 44.9 (1.77) | 17.27 (0.68) | 13.26 (0.52) | M30 x 1.5 |





AC/DC, 2 m connection cable

|      |   |             |              |              |           |
|------|---|-------------|--------------|--------------|-----------|
| ∅ 12 | ① | 62.4 (2.46) | 50.27 (1.98) | -            | _xM12 x 1 |
|      | ③ | 62.4 (2.46) | 45.77 (1.80) | 5 (0.20)     | _xM12 x 1 |
| ∅ 18 | ① | 64.5 (2.54) | 50.9 (2.00)  | -            | _xM18 x 1 |
|      | ③ | 64.5 (2.54) | 44.4 (1.75)  | 7 (0.28)     | _xM18 x 1 |
| ∅ 30 | ① | 69.3 (2.72) | 53.8 (2.12)  | -            | M30 x 1.5 |
|      | ③ | 69.3 (2.72) | 41.4 (1.63)  | 13.26 (0.52) | M30 x 1.5 |


|  | a_x<br>mm (inch)_x | b_x<br>mm (inch)_x | c_x<br>mm (inch)_x | d_x<br>MM_x |
|---|--------------------|--------------------|--------------------|-------------|
|---|--------------------|--------------------|--------------------|-------------|

DC, 2 m connection cable

|      |   |             |              |              |           |
|------|---|-------------|--------------|--------------|-----------|
| ∅ 12 | ① | 35.3 (1.39) | 23.09 (0.91) | 0.5 (0.02)   | _xM12 x 1 |
|      | ③ | 35.3 (1.39) | 18.59 (0.73) | 5 (0.20)     | _xM12 x 1 |
| ∅ 18 | ① | 35.3 (1.39) | 21.82 (0.86) | 0.5 (0.02)   | _xM18 x 1 |
|      | ③ | 35.3 (1.39) | 15.32 (0.60) | 7 (0.28)     | _xM18 x 1 |
| ∅ 30 | ① | 40.2 (1.58) | 21.26 (0.84) | 0.8 (0.03)   | M30 x 1.5 |
|      | ③ | 44.9 (1.77) | 13.46 (0.53) | 13.26 (0.52) | M30 x 1.5 |

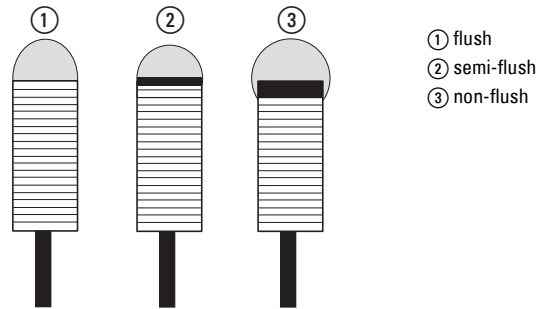

① Sensor surface


|  | a_x<br>mm (inch)_x | b_x<br>mm (inch)_x | c_x<br>mm (inch)_x | d_x<br>MM_x |
|---|--------------------|--------------------|--------------------|-------------|
|---|--------------------|--------------------|--------------------|-------------|

AC, plug-in connection M12

|      |   |             |              |              |           |
|------|---|-------------|--------------|--------------|-----------|
| ∅ 12 | ① | 57.8 (2.27) | 39.6 (1.56)  | 0.5 (0.02)   | _xM12 x 1 |
|      | ③ | 57.8 (2.27) | 35.1 (1.38)  | 5 (0.20)     | _xM12 x 1 |
| ∅ 18 | ① | 40.0 (1.57) | 21.82 (0.86) | 0.5 (0.02)   | _xM18 x 1 |
|      | ③ | 40.0 (1.57) | 15.32 (0.60) | 7 (0.28)     | _xM18 x 1 |
| ∅ 30 | ① | 44.8 (1.76) | 25.15 (0.99) | 0.8 (0.03)   | M30 x 1.5 |
|      | ③ | 49.5 (1.95) | 17.27 (0.68) | 13.26 (0.52) | M30 x 1.5 |


AC/DC, plug-in connection M12

|      |   |              |              |              |           |
|------|---|--------------|--------------|--------------|-----------|
| ∅ 12 | ① | 68.4 (2.69)  | 50.27 (1.98) | -            | _xM12 x 1 |
|      | ③ | 68.4 (2.69)  | 45.77 (1.80) | 5 (0.20)     | _xM12 x 1 |
| ∅ 18 | ① | 69.06 (2.72) | 50.9 (2.00)  | -            | _xM18 x 1 |
|      | ③ | 69.06 (2.72) | 44.4 (1.75)  | 7 (0.28)     | _xM18 x 1 |
| ∅ 30 | ① | 73.8 (2.91)  | 53.8 (2.12)  | -            | M30 x 1.5 |
|      | ③ | 73.8 (2.91)  | 41.4 (1.63)  | 13.26 (0.52) | M30 x 1.5 |

|  | a_x<br>mm (inch)_x | b_x<br>mm (inch)_x | c_x<br>mm (inch)_x | d_x<br>MM_x |
|---|--------------------|--------------------|--------------------|-------------|
|---|--------------------|--------------------|--------------------|-------------|

DC, plug-in connection M12

|      |   |             |              |              |           |
|------|---|-------------|--------------|--------------|-----------|
| ∅ 12 | ① | 41.5 (1.64) | 23.09 (0.91) | 0.5 (0.02)   | _xM12 x 1 |
|      | ③ | 41.5 (1.64) | 18.59 (0.73) | 5 (0.20)     | _xM12 x 1 |
| ∅ 18 | ① | 40.3 (1.59) | 21.82 (0.86) | 0.5 (0.02)   | _xM18 x 1 |
|      | ③ | 40.3 (1.59) | 15.32 (0.60) | 7 (0.28)     | _xM18 x 1 |
| ∅ 30 | ① | 45.0 (1.77) | 21.26 (0.84) | 0.8 (0.03)   | M30 x 1.5 |
|      | ③ | 49.7 (1.96) | 13.46 (0.53) | 13.26 (0.52) | M30 x 1.5 |

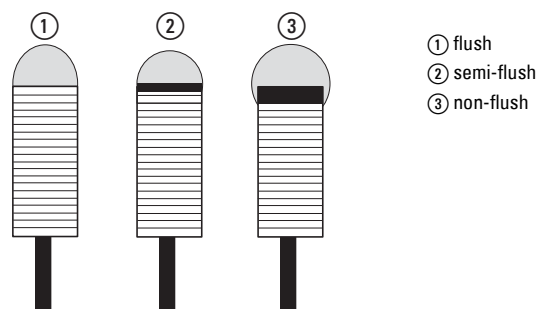

## Description



- ① High Quality Stainless Steel Housings.
- ② M12 plug connector available for sizes 6.5 and 8 mm.
- ③ Sizes 5 mm and 8 mm with thread; 4 mm and 6.5 mm without thread.
- ④ Size 6.5 mm supplied complete with mounting bracket.

## Short description

Eaton's unique inductive proximity sensors have been developed specially for use in extremely small spaces. The wide range of available models with housing diameters from 8 mm down to 4 mm covers a multitude of application scenarios. The sensors feature three-wire connections with an input voltage of 10 to 30 V DC. Both shielded and unshielded versions are available.





## Product features

- Small 4, 5, 6.5 and 8 mm diameters for use in applications with limited space for mounting sensors.
- Stainless steel enclosure.
- All models have an output status display.
- Short-circuit and reverse polarity protection.
- High degree of protection IP67.

## Approvals



## Ordering

| mm  | Rated switching distance<br>$S_n$<br>mm | Type of mounting | Switching type | For connection of:         | Contact configuration<br>N/O = normally open contact<br>N/C = normally closed contact | Part no.                                     | Article no.      | Price<br>see price list | Std. pack |
|---|---|------------------|----------------|----------------------------|---|--|------------------|-------------------------|-----------|
| <b>E57-Miniatur</b>   |   |                  |                |                            |   |  |                  |                         |           |
| Stainless steel, 3-wire, Rated operational voltage $U_e$ 10 - 30 V DC             |   |                  |                |                            |   |  |                  |                         |           |
| $\varnothing 4$   |   |                  |                |                            |   |  |                  |                         |           |
|  | 0.8                                     | Flush            | NPN<br>PNP     | 2 m connection cable       | 1 N/O   | <b>E57EAL4T110SP</b><br><b>E57EAL4T111SP</b> | 136238<br>136239 |                         | 1 off     |
| <b>M5 x 1</b>   |   |                  |                |                            |   |  |                  |                         |           |
|  | 0.8                                     | Flush            | NPN<br>PNP     | 2 m connection cable       | 1 N/O   | <b>E57EAL5T110SP</b><br><b>E57EAL5T111SP</b> | 136240<br>136241 |                         | 1 off     |
| $\varnothing 6,5$   |   |                  |                |                            |   |  |                  |                         |           |
|  | 1                                       | Flush            | NPN<br>PNP     | 2 m connection cable       | 1 N/O   | <b>E57EAL6T110SP</b><br><b>E57EAL6T111SP</b> | 136243<br>136245 |                         | 1 off     |
|   | 2                                       | Non-flush        | NPN<br>PNP     | 2 m connection cable       | 1 N/O   | <b>E57EAL6T110EP</b><br><b>E57EAL6T111EP</b> | 136242<br>136244 |                         |           |
| <b>M8 x 1</b>   |   |                  |                |                            |   |  |                  |                         |           |
|  | 1                                       | Flush            | NPN            | 2 m connection cable       | 1 N/O<br>1 NC   | <b>E57EAL8T110SP</b><br><b>E57EBL8T110SP</b> | 136249<br>136257 |                         | 1 off     |
|   |   |                  |                | Plug-in connection M12 x 1 | 1 N/O<br>1 NC   | <b>E57EAL8T110SD</b><br><b>E57EBL8T110SD</b> | 136248<br>136256 |                         |           |
|   |   |                  | PNP            | 2 m connection cable       | 1 N/O<br>1 NC   | <b>E57EAL8T111SP</b><br><b>E57EBL8T111SP</b> | 136253<br>136261 |                         |           |
|   |   |                  |                | Plug-in connection M12 x 1 | 1 N/O<br>1 NC   | <b>E57EAL8T111SD</b><br><b>E57EBL8T111SD</b> | 136252<br>136260 |                         |           |
|   |   | Non-flush        | NPN            | 2 m connection cable       | 1 N/O<br>1 NC   | <b>E57EAL8T110EP</b><br><b>E57EBL8T110EP</b> | 136247<br>136255 |                         |           |
|   |   |                  |                | Plug-in connection M12 x 1 | 1 N/O<br>1 NC   | <b>E57EAL8T110ED</b><br><b>E57EBL8T110ED</b> | 136246<br>136254 |                         |           |
|   |   |                  | PNP            | 2 m connection cable       | 1 N/O<br>1 NC   | <b>E57EAL8T111EP</b><br><b>E57EBL8T111EP</b> | 136251<br>136259 |                         |           |
|   |   |                  |                | Plug-in connection M12 x 1 | 1 N/O<br>1 NC   | <b>E57EAL8T111ED</b><br><b>E57EBL8T111ED</b> | 136250<br>136258 |                         |           |

## Technical data

## Miniature series E-57

## General

|                             |    |                            |
|-----------------------------|----|----------------------------|
| Standards                   |    | IEC/EN 60947-5             |
| Ambient temperature         | °C | - 25 - + 70                |
| Protection type             |    | IP67                       |
| Mechanical shock resistance | g  | 30<br>Shock duration 11 ms |

## Characteristics

|  |       |                                 |
|--|-------|---------------------------------|
| Repetition accuracy of $S_n$   | %     | 1                               |
| Temperature drift of $S_n$   | %     | 10                              |
| Switching hysteresis of $S_n$  | %     | 15                              |
| Rated operational voltage  | $U_e$ | 10 - 30 V DC                    |
| Operating current in the switched state at 24 V DC                             | $I_b$ | 10 mA                           |
| Maximum load current   | $I_e$ | 200 mA                          |
| Voltage drop at $I_e$  | $U_d$ | 1.5 V                           |
| Switching Frequency  | Hz    | 2000                            |
| Residual current through the load in the blocked state at 230 V AC and 24 V DC | $I_r$ | 0.01 mA                         |
| Switching state display  | LED   | Red                             |
| Protective functions   |       | Short-circuit protective device |
| Connection   |       | 3-wire                          |
| Material   |       | Stainless steel                 |

## Notes

Further technical data can be found in the Online Catalog at <http://de.ecat.moeller.net>

Engineering

Circuit diagram

Rated operational voltage  
3-Wire Sensors  
10 – 30 V DC

Contact





N/O (NPN)

N/O (PNP)





NC (NPN)

NC (PNP)

2 m connection cable




Plug-in connection M12 (front view plug)




Dimensions


E57EAL4T...

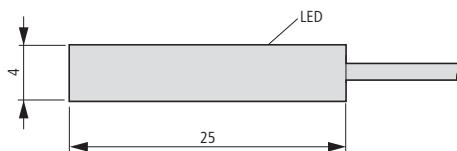

E57EAL5T...

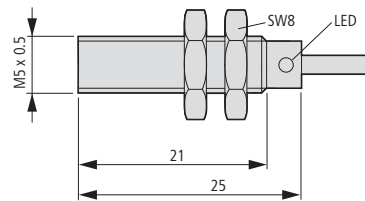


E57EAL6T...

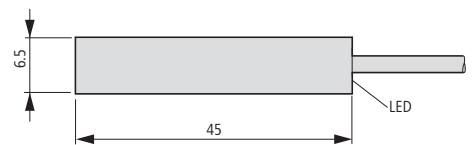


E57...8T...SP

E57...8T...EP




E57...8T...SD

E57...8T...ED

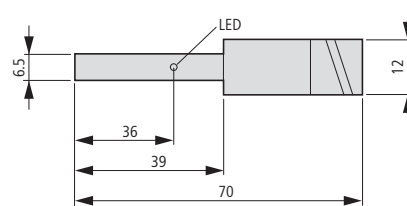

## Description

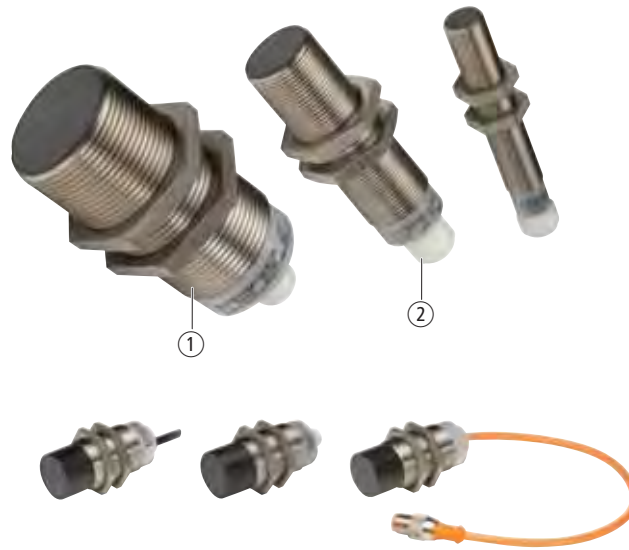

- ① Two-color 360° output signal lamp  
② Shock Absorbing Ryton Face Cap Material®

### Short Description

The iProx is Eaton's highest-performance and most versatile inductive, cylindrical sensor. With its built-in microprocessor and unique Smart-Sense™ technology this sensor has three times the range of other sensors in its class and offers unique configurability. Both screened and unscreened versions of the sensor have an extended range so that the sensor can be positioned further away from the target object. This reduces the risk of a collision with the target object and increases operational reliability. The iProx also has many extended functions, which can be activated through the optionally available programming tools. With Windows software ProxView the sensor can be programmed for any application. Sensor characteristics such as range can be set to the nearest tenth of a millimeter. The outputs can be configured as N/O or NC. Even interference immunity and response time can be adjusted. In addition the iProx features a built-in logic for deceleration and speed detection – without complex PLC programming. With its large range, high quality, sophisticated design, and adaptability to its environment, iProx is the ideal choice for demanding applications.

### Product Features










- Available as DC 3-wire version.
- Reliably detect metal targets at up to three times the range of conventional screened or unscreened tubular inductive sensors
- Quality construction using a stainless steel barrel, 360°-degree dual-color LED indicator, Ryton impact-resistant cap® and vibration-absorbing potting compound.
- The automatic configuration automatically detects NPN and PNP connections and switches the sensor accordingly and without user interaction.
- Configurable range, band detection, background (metal) object detection, deceleration and speed detection thanks to the microprocessor-based Smart-Sense™ technology.
- Optional computer programming cable and Windows-based ProxView configuration software makes it easy to customize sensors.
- Resistant to high interference levels (up to 20 V/m).
- Resistant to extreme temperatures (-40 °C).

### Approvals





Ordering

|   | Rated operational voltage<br>$U_e$ | Rated switching distance<br>$S_n$<br>mm | Type of mounting              | Switching type                     | For connection of:                 | Contact configuration<br>N/O = normally open contact<br>N/C = normally closed contact | Material                           | Part no.<br>Article no.            | Price<br>see price list | Std. pack   |
|---|------------------------------------|---|-------------------------------|------------------------------------|------------------------------------|---|------------------------------------|------------------------------------|-------------------------|---|
| <b>iProx</b>  |                                    |   |                               |                                    |                                    |   |                                    |                                    |                         |   |
| <b>3-wire</b>   |                                    |   |                               |                                    |                                    |   |                                    |                                    |                         |   |
| <b>M12 x 1</b>  |                                    |   |                               |                                    |                                    |   |                                    |                                    |                         |   |
|    | 6 - 48 V DC                        | 4                                       | Flush                         | NPN<br>PNP                         | 2 m connection cable               | 1 N/O   | Stainless steel                    | <b>E59-M12A105C02-D1</b><br>136205 | 1 off                   |       |
|   |                                    |   |                               |                                    |                                    | 1 NC  |                                    | <b>E59-M12A105C02-D2</b><br>136206 |                         |   |
|   |                                    |   | Plug-in connection<br>M12 x 1 | 1 N/O                              | <b>E59-M12A105D01-D1</b><br>136207 |   |                                    |                                    |                         |   |
|   |                                    |   |                               | 1 NC                               | <b>E59-M12A105D01-D2</b><br>136208 |   |                                    |                                    |                         |   |
|   | 10                                 | Non-flush                               | NPN<br>PNP                    | 2 m connection cable               | 1 N/O                              | Stainless steel   | <b>E59-M12C110C02-D1</b><br>136209 |                                    |                         |   |
|   |                                    |   |                               |                                    | 1 NC                               |   | <b>E59-M12C110C02-D2</b><br>136210 |                                    |                         |   |
|   |                                    | Plug-in connection<br>M12 x 1           | 1 N/O                         | <b>E59-M12C110D01-D1</b><br>136211 |                                    |   |                                    |                                    |                         |   |
|   |                                    |   | 1 NC                          | <b>E59-M12C110D01-D2</b><br>136212 |                                    |   |                                    |                                    |                         |   |
| <b>M18 x 1</b>  |                                    |   |                               |                                    |                                    |   |                                    |                                    |                         |   |
|   | 6 - 48 V DC                        | 8                                       | Flush                         | NPN<br>PNP                         | 2 m connection cable               | 1 N/O   | Stainless steel                    | <b>E59-M18A108C02-D1</b><br>136213 | 1 off                   |     |
|   |                                    |   |                               |                                    |                                    | 1 NC  |                                    | <b>E59-M18A108C02-D2</b><br>136214 |                         |   |
|   |                                    |   | Plug-in connection<br>M12 x 1 | 1 N/O                              | <b>E59-M18A108D01-D1</b><br>136215 |   |                                    |                                    |                         |   |
|   |                                    |   |                               | 1 NC                               | <b>E59-M18A108D01-D2</b><br>136216 |   |                                    |                                    |                         |   |
|   | 18                                 | Non-flush                               | NPN<br>PNP                    | 2 m connection cable               | 1 N/O                              | Stainless steel   | <b>E59-M18C116C02-D1</b><br>136217 |                                    |                         |   |
|   |                                    |   |                               |                                    | 1 NC                               |   | <b>E59-M18C116C02-D2</b><br>136218 |                                    |                         |   |
|   |                                    | Plug-in connection<br>M12 x 1           | 1 N/O                         | <b>E59-M18C116D01-D1</b><br>136219 |                                    |   |                                    |                                    |                         |   |
|   |                                    |   | 1 NC                          | <b>E59-M18C116D01-D2</b><br>136220 |                                    |   |                                    |                                    |                         |   |
| <b>M30 x 1.5</b>  |                                    |   |                               |                                    |                                    |   |                                    |                                    |                         |   |
|  | 6 - 48 V DC                        | 15                                      | Flush                         | NPN<br>PNP                         | 2 m connection cable               | 1 N/O   | Stainless steel                    | <b>E59-M30A115C02-D1</b><br>136221 | 1 off                   |   |
|   |                                    |   |                               |                                    |                                    | 1 NC  |                                    | <b>E59-M30A115C02-D2</b><br>136222 |                         |   |
|   |                                    |   | Plug-in connection<br>M12 x 1 | 1 N/O                              | <b>E59-M30A115D01-D1</b><br>136223 |   |                                    |                                    |                         |   |
|   |                                    |   |                               | 1 NC                               | <b>E59-M30A115D01-D2</b><br>136224 |   |                                    |                                    |                         |   |
|   | 29                                 | Non-flush                               | NPN<br>PNP                    | 2 m connection cable               | 1 N/O                              | Stainless steel   | <b>E59-M30C129C02-D1</b><br>136225 |                                    |                         |   |
|   |                                    |   |                               |                                    | 1 NC                               |   | <b>E59-M30C129C02-D2</b><br>136226 |                                    |                         |   |
|   |                                    | Plug-in connection<br>M12 x 1           | 1 N/O                         | <b>E59-M30C129D01-D1</b><br>136227 |                                    |   |                                    |                                    |                         |   |
|   |                                    |   | 1 NC                          | <b>E59-M30C129D01-D2</b><br>136228 |                                    |   |                                    |                                    |                         |   |
| Programming cable   | -                                  | -                                       | -                             | -                                  | Plug-in connection<br>M12 x 1      | -   | <b>E59RP1</b><br>136229            | -                                  | 1 off                   |   |
| Programming software  | -                                  | -                                       | -                             | -                                  | Plug-in connection<br>M12 x 1      | -   | <b>E59SW1</b><br>136230            | -                                  | 1 off                   |   |

WWW.TM2A.PT info@tm2a.pt

WWW.TM2A.PT info@tm2a.pt

Information relevant for export to North America



Product Standards

UL File No.  
UL CCN  
CSA File No.

UL 508; CSA-C22.2 No. 14; IEC60947-5-2; CE marking  
E166051  
NRKH, NRKH7  
UL report applies to both Canada and US

CSA Class No.  
NA Certification

Max. Voltage Rating  
Degree of Protection

-  
UL listed, certified by UL for use in Canada  
48 V DC  
IEC: IP67, IP69K; UL/CSA Type: 4, 4x, 6, 6P, 12, 13

## Technical data



|  |  |  | E59-M12A105                     | E59-M18A108 | E59-M12C110 | E59-M30A115 | E59-M18C116 | E59-M30C129 |             |             |             |
|--|--|--|---------------------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| <b>General</b>   |  |  |                                 |             |             |             |             |             |             |             |             |
| Standards  |  |  | IEC/EN 60947-5-2                |             |             |             |             |             |             |             |             |
| Ambient temperature  |  |  | °C - 40 - + 70                  |             |             |             |             |             |             |             |             |
| Protection type  |  |  | IP67                            | IP69K       | IP67        | IP69K       | IP69K       | IP69K       |             |             |             |
| Mechanical shock resistance  |  |  | g 30<br>Shock duration 11 ms    |             |             |             |             |             |             |             |             |
| <b>Characteristics</b>   |  |  |                                 |             |             |             |             |             |             |             |             |
| Rated switching distance   |  |  |                                 |             |             |             |             |             |             |             |             |
| Rated switching distance   |  |  | $S_n$                           | mm          | 4           | 8           | 10          | 15          | 18          | 29          |             |
| Repetition accuracy of $S_n$   |  |  |                                 |             | %           | 1           | 1           | 3           | 1           | 3           | 3           |
| Temperature drift of $S_n$   |  |  |                                 |             | %           | 10          | 10          | 10          | 10          | 10          | 10          |
| Switching hysteresis of $S_n$  |  |  |                                 |             | %           | 15          | 15          | 15          | 15          | 15          | 15          |
| Range  |  |  |                                 |             | mm          | -           | -           | -           | -           | -           | -           |
| Rated operational voltage  |  |  |                                 |             | $U_e$       | 6 - 48 V DC | 6 - 48 V DC | 6 - 48 V DC | 6 - 48 V DC | 6 - 48 V DC | 6 - 48 V DC |
| Supply frequency   |  |  |                                 |             |             |             |             |             |             |             |             |
| Residual ripple of $U_e$   |  |  |                                 |             | %           | -           | -           | -           | -           | -           | -           |
| Operating current in the switched state at 24 V DC                             |  |  | $I_b$                           | mA          | 15          | 15          | 15          | 15          | 15          | 15          | 15          |
| Maximum load current   |  |  | $I_e$                           | mA          | 300         | 300         | 300         | 300         | 300         | 300         | 300         |
| Voltage drop at $I_e$  |  |  | $U_d$                           | V           | 2.5         | 2.5         | 2.5         | 2.5         | 2.5         | 2.5         | 2.5         |
| Switching Frequency  |  |  |                                 |             | Hz          | 580         | 390         | 300         | 240         | 150         | 145         |
| Min. load current  |  |  | $I_e$                           | mA          | 1           | 1           | 1           | 1           | 1           | 1           | 1           |
| Short-time current (10 ms, 5 Hz)   |  |  |                                 |             | A           | -           | -           | -           | -           | -           | -           |
| Residual current through the load in the blocked state at 230 V AC and 24 V DC |  |  | $I_r$                           | mA          | 0.15        | 0.15        | 0.15        | 0.15        | 0.15        | 0.15        | 0.15        |
| Switching state display  |  |  |                                 |             | LED         | Red         | Red         | Red         | Red         | Red         | Red         |
| Operating voltage display  |  |  |                                 |             | LED         | Green       | Green       | Green       | Green       | Green       | Green       |
| Boundary gain  |  |  |                                 |             |             | -           | -           | -           | -           | -           | -           |
| Protective functions   |  |  | Short-circuit protective device |             |             |             |             |             |             |             |             |
| Connection   |  |  |                                 |             |             | 3-wire      | 3-wire      | 3-wire      | 3-wire      | 3-wire      | 3-wire      |
| Design (outer dimensions)  |  |  |                                 |             | mm          | M12 x 1     | M18 x 1     | M12 x 1     | M30 x 1.5   | M18 x 1     | M30 x 1.5   |
| Material   |  |  | Stainless steel                 |             |             |             |             |             |             |             |             |

## Notes

Further technical data can be found in the Online Catalog at <http://de.ecat.moeller.net>

## Engineering

## Circuit diagram


E59...C02-D1  
E59...C02-D2E59...D01-D1  
E59...D01-D2

Pins 2 and 4 internally interconnected.

## Dimensions

2 m connection cable


E59-M...C02...



| Type         | $a_x$       | $b_x$       | $c_x$       | $d_x$       |
|--------------|-------------|-------------|-------------|-------------|
|              | mm (inch)_x | mm (inch)_x | mm (inch)_x | mm (inch)_x |
| E59-M12A...  | 62.4 (2.46) | 50.3 (1.98) | 0.5 (0.02)  | _xM12 x 1   |
| E59-M12C...  | 62.4 (2.46) | 41.6 (1.64) | 9 (0.35)    | _xM12 x 1   |
| E59-M18A...  | 64.5 (2.54) | 50.9 (2.0)  | 0.5 (0.02)  | _xM18 x 1   |
| E59-M18C...  | 64.5 (2.54) | 37.4 (1.47) | 14 (0.55)   | _xM18 x 1   |
| E59-M30A...  | 69.6 (2.74) | 54.1 (2.13) | 0.75 (0.03) | M30 x 1.5   |
| E59-M30CA... | 69.6 (2.74) | 35.8 (1.41) | 19 (0.75)   | M30 x 1.5   |

Plug-in connection M12 x 1

E59-M...D01...



| Type         | $a_x$       | $b_x$       | $c_x$       | $d_x$       |
|--------------|-------------|-------------|-------------|-------------|
|              | mm (inch)_x | mm (inch)_x | mm (inch)_x | mm (inch)_x |
| E59-M12A...  | 68.7 (2.7)  | 50.3 (1.98) | 0.5 (0.02)  | _xM12 x 1   |
| E59-M12C...  | 68.7 (2.7)  | 41.6 (1.64) | 9 (0.35)    | _xM12 x 1   |
| E59-M18A...  | 69.3 (2.73) | 50.9 (2.0)  | 0.5 (0.02)  | _xM18 x 1   |
| E59-M18C...  | 69.3 (2.73) | 37.4 (1.47) | 14 (0.55)   | _xM18 x 1   |
| E59-M30A...  | 74.1 (2.92) | 54.1 (2.13) | 0.75 (0.03) | M30 x 1.5   |
| E59-M30CA... | 74.1 (2.92) | 35.8 (1.41) | 19 (0.75)   | M30 x 1.5   |

## Description



### Short Description

The AccuProx is a high performance analog inductive proximity sensor. The AccuProx family of analog sensors provide unmatched sensing range, linearity and resolution in an affordable and compact tubular enclosure.

Unlike standard inductive sensors, which send an open or close signal upon target presence or absence, AccuProx analog sensors provide an electrical signal that varies in proportion to the position of the metal target within its sensing range.

This makes AccuProx ideal for applications requiring precise position sensing and measurement.

The sensing performance of AccuProx sets it apart from traditional analog inductive designs. Utilizing components from the cutting-edge iProx family, AccuProx provides sensing ranges of three to four times that of typical tubular analog inductive sensors — all without compromising accuracy.

AccuProx has the range and precision to solve your most difficult measurement applications.

### Typical Applications

- Part positioning.
- Distance, size and thickness measurement.
- General inspection and error proofing, such as material imperfection or blemish detection.
- Eccentricity or Absolute Angle Detection.
- Identification of different metals.
- Two mounting options for maximum flexibility

### Product Features

- Extended linear sensing range of up to 25 millimeters—three times longer than standard tubular analog inductive sensors.
- Current outputs (4-20 or 0-20 mA) and voltage outputs (0-10 V) available.
- High output resolution and repeatability for applications requiring precision sensing performance.
- Robust stainless steel barrel, shock-resistant front cap, polycarbonate end bell and impact-absorbing potting compound.
- Resistant to elevated temperatures and high-pressure sprays - ideal for environments with extreme temperatures and wet areas.
- High noise immunity of 20V/m prevents many problems associated with electrical noise.

### Approvals



**AccuProx - Powerful analog range in a tried-and-true enclosure**

Historically, the range of applications for analog sensors has been severely limited due to short sensing ranges, which rarely exceed one or two millimeters. This, however, has changed with the use of a perfected technology that enables AccuProx sensors to sense objects at distances of up to 25 millimeters, all while maintaining excellent output accuracy levels.

AccuProx utilizes many of the proven materials found in other tubular sensor families. The threaded barrel and included mounting nuts are made of stainless steel, which exhibits superior corrosion and abrasion resistance versus nickel-plated brass. AccuProx also features a proprietary internal potting compound that absorbs impacts and vibration while sealing out moisture. The materials used in the construction of AccuProx are time-tested and proven to work.

**High Output Accuracy**

Analog inductive sensors are often used in applications that require a higher level of precision than a standard digital sensor. For example, applications such as part inspection require a sensor that can detect very small variances. AccuProx has been designed with these applications in mind.


Output accuracy is determined by the repetition accuracy, resolution, linearity and response time of the sensor.

The **Repetition accuracy** refers to the variations in sensing distance between successive sensor operations due to component tolerances, where all operating conditions are kept the same. The repetition accuracy of an 18 millimeter, unshielded AccuProx sensor is less than 20 micrometers.

**Resolution** refers to the number of "steps" in the sensor output. A higher resolution is ideal because it will allow the sensor to detect smaller changes in target position.


An 18 millimeter, unshielded AccuProx features more than 350 output steps, ensuring consistent performance.

The **Linearity** refers to the shape of the output curve. Many analog sensors exhibit a wavy or "S-shaped" output curve. This means that a change in target distance may not always translate into an equivalent change in output, particularly at the innermost and outermost ranges of a non-linear analog sensor. AccuProx features a linear output. See the diagram below for an example of AccuProx versus a non-linear sensor.




- ① Output
- ② Distance
- ③ Non-linear sensor
- ④ AccuProx Sensor


**Typical Analog Applications**





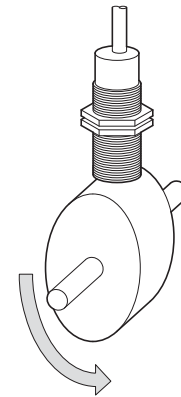






Material Imperfection or Blemish Detection



Eccentricity or Absolute Angle Detection



Saw Blade Deflection

|   | Design (outer dimensions)<br>mm | Rated switching distance<br>S <sub>n</sub><br>mm | Type of mounting           | For connection of:                                       | Description  | Part no. Article no.               | Price see price list | Std. pack  |
|---|---------------------------------|--|----------------------------|--|--|------------------------------------|----------------------|--|
| <b>E59 AccuProx</b>   |                                 |  |                            |  |  |                                    |                      |  |
| 3-wire/4-wire<br>Rated operational voltage U <sub>e</sub> 15 - 30 V DC<br>Analog<br>Stainless steel |                                 |  |                            |  |  |                                    |                      |  |
|                    | M12 x 1                         | 0.5 - 4  | Flush                      | Plug-in connection M12 x 1                               | Current output (0 - 20 mA) and voltage output (0 - 10 V) | <b>E59-A12A104D01-CV</b><br>166834 |                      | 1 off<br>      |
|   |                                 |  |                            | 2 m connection cable                                     |  | <b>E59-A12A104C02-CV</b><br>166832 |                      |  |
|   |                                 | Plug-in connection M12 x 1                       | Current output (4 - 20 mA) | <b>E59-A12A104D01-C1</b><br>166833                       |  |                                    |                      |  |
|   |                                 | 2 m connection cable                             |                            | <b>E59-A12A104C02-C1</b><br>166831                       |  |                                    |                      |  |
|   | 1 - 8                           | Non-flush  | Plug-in connection M12 x 1 | Current output (0 - 20 mA) and voltage output (0 - 10 V) | <b>E59-A12C108D01-CV</b><br>166838                       |                                    |                      |  |
|   |                                 |  | 2 m connection cable       |  | <b>E59-A12C108C02-CV</b><br>166836                       |                                    |                      |  |
|   |                                 | Plug-in connection M12 x 1                       | Current output (4 - 20 mA) | <b>E59-A12C108D01-C1</b><br>166837                       |  |                                    |                      |  |
|   |                                 | 2 m connection cable                             |                            | <b>E59-A12C108C02-C1</b><br>166835                       |  |                                    |                      |  |
|                   | M18 x 1                         | 1 - 7  | Flush                      | Plug-in connection M12 x 1                               | Current output (0 - 20 mA) and voltage output (0 - 10 V) | <b>E59-A18A107D01-CV</b><br>166806 |                      | 1 off<br>      |
|   |                                 |  |                            | 2 m connection cable                                     |  | <b>E59-A18A107C02-CV</b><br>166804 |                      |  |
|   |                                 | Plug-in connection M12 x 1                       | Current output (4 - 20 mA) | <b>E59-A18A107D01-C1</b><br>166805                       |  |                                    |                      |  |
|   |                                 | 2 m connection cable                             |                            | <b>E59-A18A107C02-C1</b><br>166839                       |  |                                    |                      |  |
|   | 1 - 15                          | Non-flush  | Plug-in connection M12 x 1 | Current output (0 - 20 mA) and voltage output (0 - 10 V) | <b>E59-A18C115D01-CV</b><br>166994                       |                                    |                      |  |
|   |                                 |  | 2 m connection cable       |  | <b>E59-A18C115C02-CV</b><br>166807                       |                                    |                      |  |
|   |                                 | Plug-in connection M12 x 1                       | Current output (4 - 20 mA) | <b>E59-A18C115D01-C1</b><br>166808                       |  |                                    |                      |  |
|   |                                 | 2 m connection cable                             |                            | <b>E59-A18C115C02-C1</b><br>138201                       |  |                                    |                      |  |
|                  | M30 x 1.5                       | 1 - 12   | Flush                      | Plug-in connection M12 x 1                               | Current output (0 - 20 mA) and voltage output (0 - 10 V) | <b>E59-A30A112D01-CV</b><br>166685 |                      | 1 off<br>  |
|   |                                 |  |                            | 2 m connection cable                                     |  | <b>E59-A30A112C02-CV</b><br>166719 |                      |  |
|   |                                 | Plug-in connection M12 x 1                       | Current output (4 - 20 mA) | <b>E59-A30A112D01-C1</b><br>166684                       |  |                                    |                      |  |
|   |                                 | 2 m connection cable                             |                            | <b>E59-A30A112C02-C1</b><br>166809                       |  |                                    |                      |  |
|   | 1 - 25                          | Non-flush  | Plug-in connection M12 x 1 | Current output (0 - 20 mA) and voltage output (0 - 10 V) | <b>E59-A30C125D01-CV</b><br>166689                       |                                    |                      |  |
|   |                                 |  | 2 m connection cable       |  | <b>E59-A30C125C02-CV</b><br>166687                       |                                    |                      |  |
|   |                                 | Plug-in connection M12 x 1                       | Current output (4 - 20 mA) | <b>E59-A30C125D01-C1</b><br>166688                       |  |                                    |                      |  |
|   |                                 | 2 m connection cable                             |                            | <b>E59-A30C125C02-C1</b><br>166686                       |  |                                    |                      |  |


WWW.TM2A.PT info@tm2a.pt

WWW.TM2A.PT info@tm2a.pt




Engineering


Linear output

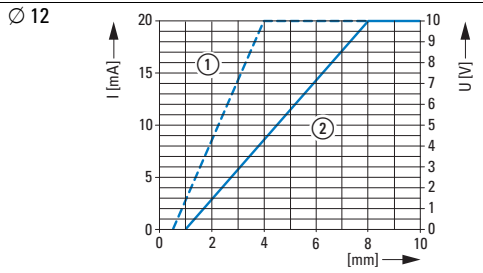




Measurement resolution<sup>1)</sup>

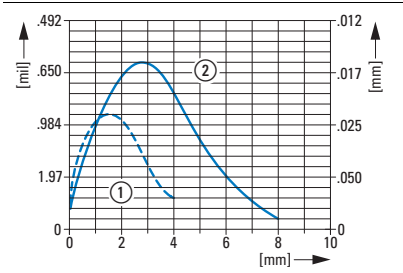




Output resolution<sup>2)</sup>

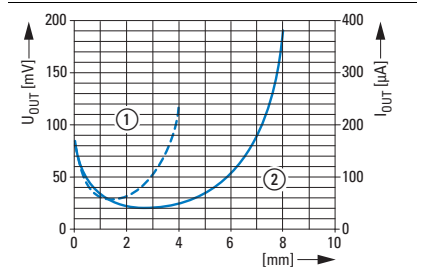

① flush  
② non-flush

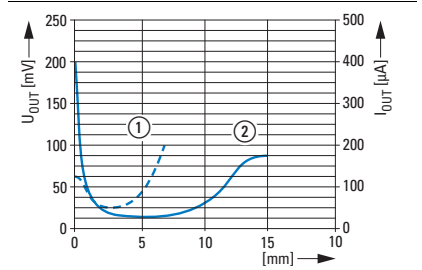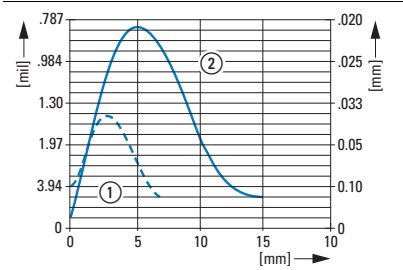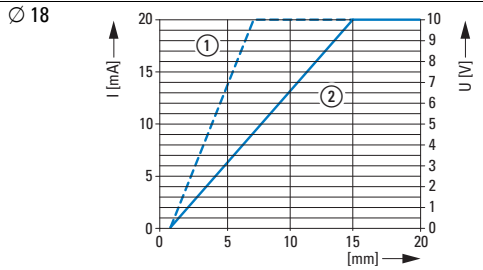

① flush  
② non-flush

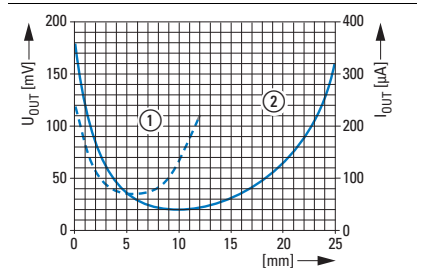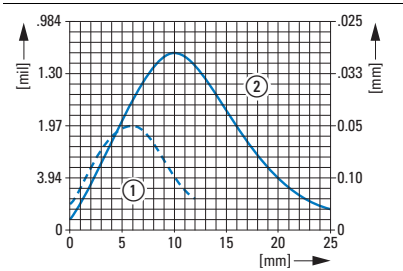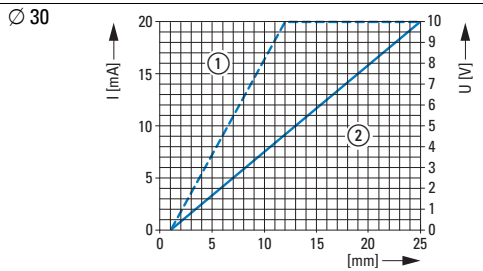

① flush  
② non-flush

<sup>1)</sup>Measurement resolution is the sensor's ability to detect a change in target position.

The measurement resolution is the finest at the highest point in the curve.

<sup>2)</sup>Output resolution is the change in output signal relative to target position.



The minimum change in output resolution is defined by the lowest point in the curve.

Outputs


Micro Connector Models

Cable and Pigtail Models



...-C1<sup>1)</sup> Ø 12 4 - 20 mA



...-C1<sup>1)</sup> Ø 18  
Ø 30 4 - 20 mA



...-CV 0 - 20 mA  
0 - 10 V



| → DIN IEC 304, DIN IEC 757 |       |
|----------------------------|-------|
| BK                         | Black |
| BN                         | Brown |
| BU                         | Blue  |
| WH                         | white |

<sup>1)</sup> Pins 2 and 4 are internally connected in all models ending in -C1 (models with current output only).


→ Do not connect the outputs of C1 models to different loads—these sensors should only be connected to one single output load!

Technical data


|                                       |                   | E59-A12A...                | E59-A12C...      | E59-A18A...      | E59-A18C...      | E59-A30A...      | E59-A30C...      |
|---------------------------------------|-------------------|----------------------------|------------------|------------------|------------------|------------------|------------------|
| <b>General</b>                        |                   |                            |                  |                  |                  |                  |                  |
| Standards                             |                   | IEC/EN 60947-5-2           | IEC/EN 60947-5-2 | IEC/EN 60947-5-2 | IEC/EN 60947-5-2 | IEC/EN 60947-5-2 | IEC/EN 60947-5-2 |
| Ambient temperature                   | °C                | - 40 - + 70                | - 40 - + 70      | - 40 - + 70      | - 40 - + 70      | - 40 - + 70      | - 40 - + 70      |
| Protection type                       |                   | IP67                       | IP67             | IP67             | IP67             | IP67             | IP67             |
| Mechanical shock resistance           | g                 | 30<br>Shock duration 11 ms |                  |                  |                  |                  |                  |
| <b>Characteristics</b>                |                   |                            |                  |                  |                  |                  |                  |
| Rated switching distance              | S <sub>n</sub> mm | 0.5 - 4                    | 1 - 8            | 1 - 7            | 1 - 15           | 1 - 12           | 1 - 25           |
| Repetition accuracy of S <sub>n</sub> | %                 | 3                          | 1                | 2                | 1                | 1                | 1                |
| Temperature drift of S <sub>n</sub>   | %                 | 10                         | 10               | 10               | 10               | 10               | 10               |
| Rated operational voltage             | U <sub>e</sub>    | 15 - 30 V DC               | 15 - 30 V DC     | 15 - 30 V DC     | 15 - 30 V DC     | 15 - 30 V DC     | 15 - 30 V DC     |
| Switching state display               | LED               | Red                        | Red              | Red              | Red              | Red              | Red              |
| Operating voltage display             | LED               | Green                      | Green            | Green            | Green            | Green            | Green            |
| Connection                            |                   | 3-wire/4-wire              | 3-wire/4-wire    | 3-wire/4-wire    | 3-wire/4-wire    | 3-wire/4-wire    | 3-wire/4-wire    |
| Design (outer dimensions)             | mm                | M12 x 1                    | M12 x 1          | M18 x 1          | M18 x 1          | M30 x 1.5        | M30 x 1.5        |
| For connection of:                    |                   | Plug-in connection M12 x 1 |                  |                  |                  |                  |                  |
| ...D01...                             |                   | 2 m connection cable       |                  |                  |                  |                  |                  |
| ...C02...                             |                   |                            |                  |                  |                  |                  |                  |
| Material                              |                   | Stainless steel            | Stainless steel  | Stainless steel  | Stainless steel  | Stainless steel  | Stainless steel  |

Dimensions

Plug-in connection M12 x 1

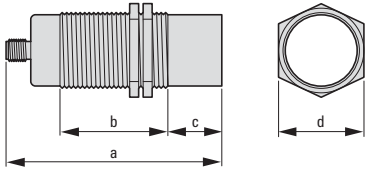


2 m connection cable

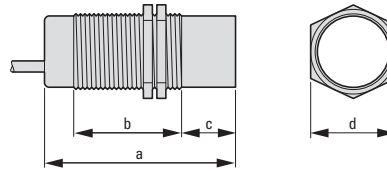


| mm   |   | a<br>mm (inch) | b<br>mm (inch) | c<br>mm (inch) | d<br>mm (inch) |
|------|---|----------------|----------------|----------------|----------------|
| ∅ 12 | ① | 77.5 (3.05)    | 50.3 (1.98)    | 0.5 (0.02)     | 17 (0.67)      |
|      | ③ | 77.5 (3.05)    | 41.6 (1.64)    | 9 (0.36)       | 17 (0.67)      |
| ∅ 18 | ① | 69.3 (2.73)    | 50.9 (2)       | 0.5 (0.02)     | 24 (0.94)      |
|      | ③ | 69.3 (2.73)    | 37.4 (1.47)    | 14 (0.55)      | 24 (0.94)      |
| ∅ 30 | ① | 74.1 (2.92)    | 54.1 (2.13)    | 0.75 (0.03)    | 36 (1.41)      |
|      | ③ | 74.1 (2.92)    | 35.8 (1.41)    | 19 (0.75)      | 36 (1.41)      |

| mm   |   | a<br>mm (inch) | b<br>mm (inch) | c<br>mm (inch) | d<br>mm (inch) |
|------|---|----------------|----------------|----------------|----------------|
| ∅ 12 | ① | 62.4 (2.46)    | 50.3 (1.98)    | 0.5 (0.02)     | 17 (0.67)      |
|      | ③ | 62.4 (2.46)    | 41.6 (1.64)    | 9 (0.36)       | 17 (0.67)      |
| ∅ 18 | ① | 64.5 (2.54)    | 50.9 (2)       | 0.5 (0.02)     | 24 (0.94)      |
|      | ③ | 64.5 (2.54)    | 37.4 (1.47)    | 14 (0.55)      | 24 (0.94)      |
| ∅ 30 | ① | 69.6 (2.74)    | 54.1 (2.13)    | 0.75 (0.03)    | 36 (1.41)      |
|      | ③ | 64.5 (2.54)    | 35.8 (1.41)    | 19 (0.75)      | 36 (1.41)      |



- ① bündig
- ② halbbündig
- ③ nicht bündig

## Description

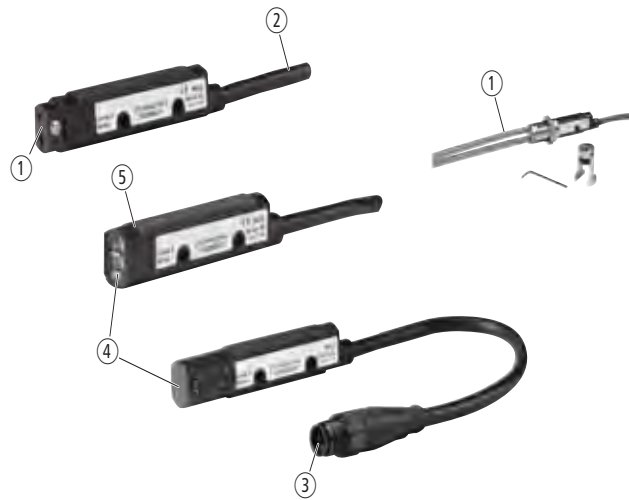

- ① FO cable versions possible.
- ② Bright/dark selector switch on all models.
- ③ Models with M12 plug connector.
- ④ Sensing beam 0° or 90°.
- ⑤ Solid Polyurethane Body for Rugged Use.

## Short Description

Eaton's high-performance light barriers feature a tubular enclosure with a diameter of 18 mm and are available in a range of versions to solve virtually any sensing problem. The sensors are available in thru-beam, reflex, polarized reflex, diffuse reflective, focused diffuse reflective, wide-angle diffuse reflective, Perfect Prox<sup>®</sup>\_x, Fine Spot Perfect Prox<sup>®</sup>\_x and fiber optic sensing versions. Perfect Prox<sup>®</sup>\_x light barriers are among the most powerful on the market. These sensors can reliably detect targets of different color, reflectance, contrast or surface shape at the same range, while ignoring background objects just a fraction of an inch away. The Comet model series includes AC/DC and DC-only models with 2-, 3- and 4-wire circuitry, and with cable or M 12 micro-connector. Each light barrier features a Light/ Dark changeover switch and a gain control to provide for quick adjustment to peak optical performance. The unique threaded housing with flat sides allows quick mounting in a 3/4 mm hole or against any flat surface. Internal components are rigidly sealed in a solid encapsulated package for excellent performance in high vibration and high-shock applications.
























## Product Features

- Industry standard 18 mm diameter threaded body has flat sides allowing it to be mounted like a tubular sensor or against any flat surface.
- Models with a 90° measurement direction can be installed in holes with a depth of only 152 mm.
- Perfect Prox<sup>®</sup>\_x technology provides exceptional background rejection and application problem-solving.
- Visible sensing beams let you see where the light barrier is aimed for quick flush mounting and alignment.
- Solid polyurethane housing completely encapsulates internal circuits for high resistance to shock and vibration
- Adaptable modulation circuit provides immunity to crosstalk from other closely mounted sensors
- Models available with both AC and DC operation in a single unit – up to 264 volts AC.
- 4-wire DC sensors offer both NPN and PNP outputs.
- Output status indicator visible from a wide 270° angle.



## Approvals



Ordering




|   | Rated operational voltage<br>$U_e$ | Switching type | Rated switching distance<br>$S_n$<br>mm | For connection of:                     | Description                                    | Type of light               | Part no.<br>Article no.                      | Price<br>see price list  | Std. pack  |  |  |  |  |
|---|------------------------------------|----------------|---|--|--|-----------------------------|--|--|--|--|--|--|--|
| <b>Comet series</b>   |                                    |                |   |  |  |                             |  |  |  |  |  |  |  |
| M18 x 1, Light/dark switching adjustable, Insulated material                        |                                    |                |   |  |  |                             |  |  |  |  |  |  |  |
| 3-wire  |                                    |                |   |  |  |                             |  |  |  |  |  |  |  |
| Thru-beam photoelectric sensor, Beam: straight                                      |                                    |                |   |  |  |                             |  |  |  |  |  |  |  |
|    | 20 - 264 V AC<br>15 - 30 V DC      | NPN            | 6000                                    | 2 m connection cable                   | Detector (for combination with source)         | Visible red                 | <b>12100A6513</b><br>135566                  |  | 1 off<br>      |  |  |  |  |
|   |                                    |                |   | Plug-in connection M12 x 1             |  |                             | <b>12100AQD03</b><br>135568                  |  |  |  |  |  |  |
|   |                                    |                | 24000                                   | 2 m connection cable                   | Source (for combination with detector)         | Visible red                 | <b>12102A6513</b><br>135574                  |  |  |  |  |  |  |
|   |                                    |                |   | Plug-in connection M12 x 1             |  |                             | <b>12102AQD03</b><br>135576                  |  |  |  |  |  |  |
|   |                                    | 6000           | 2 m connection cable                    | Source (for combination with detector) | Visible red                                    | <b>11100A6513</b><br>135554 |  | 1 off<br>  |  |  |  |  |  |
|   |                                    |                | Plug-in connection M12 x 1              |  |  | <b>11100AQD03</b><br>135556 |  |  |  |  |  |  |  |
|   |                                    | 24000          | 2 m connection cable                    | Source (for combination with detector) | Visible red                                    | <b>11102A6513</b><br>135562 |  |  |  | 1 off<br>  |  |  |  |
|   |                                    |                | Plug-in connection M12 x 1              |  |  | <b>11102AQD03</b><br>135564 |  |  |  |  |  |  |  |
| Thru-beam photoelectric sensor, Beam: right-angled                                  |                                    |                |   |  |  |                             |  |  |  |  |  |  |  |
|   | 20 - 264 V AC<br>15 - 30 V DC      | NPN            | 6000                                    | 2 m connection cable                   | Detector (for combination with source)         | Visible red                 | <b>12100R6513</b><br>135570                  |  |  |  | 1 off<br>  |  |  |
|   |                                    |                |   | Plug-in connection M12 x 1             |  |                             | <b>12100RQD03</b><br>135572                  |  |  |  |  |  |  |
|   |                                    |                |   |  |  | 2 m connection cable        | Source (for combination with detector)       |  | Visible red  | <b>11100R6513</b><br>135558  |  |  | 1 off<br>  |
|   |                                    |                |   |  |  | Plug-in connection M12 x 1  |  |  |  | <b>11100RQD03</b><br>135560  |  |  |  |
| Reflex photoelectric sensor, Beam: straight   |                                    |                |   |  |  |                             |  |  |  |  |  |  |  |
|  | 20 - 264 V AC<br>15 - 30 V DC      | NPN            | 4500                                    | 2 m connection cable                   | Polarized light for combination with reflector | Visible red                 | <b>14101A6513</b><br>135646                  |  | 1 off<br>  |  |  |  |  |
|   |                                    |                |   | Plug-in connection M12 x 1             |  |                             | <b>14101AQD03</b><br>135648                  |  |  |  |  |  |  |
|   |                                    |                | 7600                                    | 2 m connection cable                   | non-polarized for combination with reflector   | Infra-red                   | <b>14100A6513</b><br>135642                  |  |  |  |  |  |  |
|   |                                    |                |   | Plug-in connection M12 x 1             |  |                             | <b>14100AQD03</b><br>135644                  |  |  |  |  |  |  |
|   |                                    |                |   |  |  | 2 m connection cable        | non-polarized for combination with reflector |  |  | Visible red  | <b>14102A6513</b><br>135654  |  | 1 off<br>  |
|   |                                    |                |   |  |  | Plug-in connection M12 x 1  |  |  |  |  | <b>14102AQD03</b><br>135656  |  |  |
| Reflex photoelectric sensor, Beam: right-angled                                     |                                    |                |   |  |  |                             |  |  |  |  |  |  |  |
|  | 20 - 264 V AC<br>15 - 30 V DC      | NPN            | 3000                                    | 2 m connection cable                   | Polarized light for combination with reflector | Visible red                 | <b>14101R6513</b><br>135650                  |  | 1 off<br>  |  |  |  |  |
|   |                                    |                |   | Plug-in connection M12 x 1             |  |                             | <b>14101RQD03</b><br>135652                  |  |  |  |  |  |  |
|   |                                    |                | 4500                                    | 2 m connection cable                   | non-polarized for combination with reflector   | Visible red                 | <b>14102R6513</b><br>135658                  |  |  |  |  |  |  |
|   |                                    |                |   | Plug-in connection M12 x 1             |  |                             | <b>14102RQD03</b><br>135660                  |  |  |  |  |  |  |
| Reflected-light beam, Beam: focused, forward viewing                                |                                    |                |   |  |  |                             |  |  |  |  |  |  |  |
|  | 20 - 264 V AC<br>15 - 30 V DC      | NPN            | 40                                      | 2 m connection cable                   |  | Visible red                 | <b>13102A6513</b><br>135590                  |  | 1 off<br>  |  |  |  |  |
|   |                                    |                | 40                                      | Plug-in connection M12 x 1             |  |                             | <b>13102AQD03</b><br>135592                  |  |  |  |  |  |  |

Information relevant for export to North America

|   |                      |  |
|---|----------------------|--|
|   | Product Standards    | UL 508; CSA-C22.2 No. 14; IEC60947-5-2; CE marking |
|   | UL File No.          | E117028  |
|   | UL CCN               | NRKH, NRKH7  |
|   | CSA File No.         | 50513  |
|   | CSA Class No.        | 3211-07  |
|   | NA Certification     | UL listed, CSA certified                           |
|   | Max. Voltage Rating  | 264 V AC, 30 V DC                                  |
|   | Degree of Protection | IEC: IP68, IP69K; UL/CSA Type: 1, 4, 6             |

WWW.TM2A.PT info@tm2a.pt















WWW.TM2A.PT info@tm2a.pt

|   | Rated operational voltage<br>$U_e$ | Switching type                                     | Rated switching distance<br>$S_n$<br>mm   | For connection of:            | Description  | Type of light | Part no.<br>Article no.    | Price<br>see price list                       | Std. pack  |             |            |  |  |
|---|------------------------------------|--|---|-------------------------------|--|---------------|----------------------------|---|--|-------------|------------|--|--|
| <b>Reflected-light beam, Beam: straight</b>                                       |                                    |  |   |                               |  |               |                            |   |  |             |            |  |  |
|  | 20 - 264 V AC<br>15 - 30 V DC      | NPN  | 50  | 2 m connection cable          | with background suppression<br>(Perfect Prox)                      | Visible red   | 13104A6513                 |   | 1 off<br>  |             |            |  |  |
|   |                                    |  |   | Plug-in connection M12 x 1    |  |               | 13104A0D03                 |   |  |             |            |  |  |
|   |                                    |  | 100   | 2 m connection cable          | with background suppression<br>(Perfect Prox)<br>Fine Spot Sensors | Infra-red     | 13105A6513                 |   |  |             |            |  |  |
|   |                                    |  |   | Plug-in connection M12 x 1    |  |               | 13105A0D03                 |   |  |             |            |  |  |
|   |                                    |  | 150   | 2 m connection cable          | Detection of transparent objects                                   | Infra-red     | 13101A6513                 |   |  |             |            |  |  |
|   |                                    |  |   | Plug-in connection M12 x 1    |  |               | 13101A0D03                 |   |  |             |            |  |  |
|   |                                    |  | 200   | 2 m connection cable          | with background suppression<br>(Perfect Prox)                      | Infra-red     | 13107AS6513                |   |  |             |            |  |  |
|   |                                    |  |   | Plug-in connection M12 x 1    |  |               | 13107AS0D03                |   |  |             |            |  |  |
|   |                                    |  | 225   | 2 m connection cable          | Expandable with fiber optic cable →<br>Accessories                 | Infra-red     | 13108A6513                 |   |  |             |            |  |  |
|   |                                    |  |   | Plug-in connection M12 x 1    |  |               | 13108A0D03                 |   |  |             |            |  |  |
|   |                                    |  | 610   | 2 m connection cable          | with background suppression<br>(Perfect Prox)                      | Infra-red     | 13106A6513                 |   |  |             |            |  |  |
|   |                                    |  |   | Plug-in connection M12 x 1    |  |               | 13106A0D03                 |   |  |             |            |  |  |
|   |                                    |  |  | 20 - 264 V AC<br>15 - 30 V DC | NPN  | 50            | 2 m connection cable       | with background suppression<br>(Perfect Prox) |  | Visible red | 13104R6513 |  | 1 off<br>  |
|   |                                    |  |   |                               |  |               | Plug-in connection M12 x 1 |   |  |             | 13104R0D03 |  |  |
| 100   | Plug-in connection M12 x 1         | with background suppression<br>(Perfect Prox)      |   |                               |  | Visible red   | 13104RS5003                |   |  |             |            |  |  |
|   | 2 m connection cable               |  |   |                               |  |               | 13104RS5013                |   |  |             |            |  |  |
| 150   | 2 m connection cable               | Detection of transparent objects                   |   |                               |  | Infra-red     | 13107RS6513                |   |  |             |            |  |  |
|   | Plug-in connection M12 x 1         |  |   |                               |  |               | 13107RS0D03                |   |  |             |            |  |  |
| 200   | 2 m connection cable               | with background suppression<br>(Perfect Prox)      |   |                               |  | Infra-red     | 13108R6513                 |   |  |             |            |  |  |
|   | Plug-in connection M12 x 1         |  |   |                               |  |               | 13108R0D03                 |   |  |             |            |  |  |
| 225   | 2 m connection cable               | Expandable with fiber optic cable →<br>Accessories |   |                               |  | Infra-red     | 13106R6513                 |   |  |             |            |  |  |
|   | Plug-in connection M12 x 1         |  |   |                               |  |               | 13106R0D03                 |   |  |             |            |  |  |
| 610   | 2 m connection cable               | with background suppression<br>(Perfect Prox)      |   |                               |  | Infra-red     | 13103R6513                 |   |  |             |            |  |  |
|   | Plug-in connection M12 x 1         |  |   |                               |  |               | 13103R0D03                 |   |  |             |            |  |  |
| 610   | 2 m connection cable               | Expandable with fiber optic cable →<br>Accessories |   |                               |  | Infra-red     | 13100R6513                 |   |  |             |            |  |  |
|   | Plug-in connection M12 x 1         |  |   |                               |  |               | 13100R0D03                 |   |  |             |            |  |  |

## Information relevant for export to North America



|                      |  |
|----------------------|--|
| Product Standards    | UL 508; CSA-C22.2 No. 14; IEC60947-5-2; CE marking |
| UL File No.          | E117028  |
| UL CCN               | NRKH, NRKH7  |
| CSA File No.         | 50513  |
| CSA Class No.        | 3211-07  |
| NA Certification     | UL listed, CSA certified                           |
| Max. Voltage Rating  | 264 V AC, 30 V DC                                  |
| Degree of Protection | IEC: IP68, IP69K; UL/CSA Type: 1, 4, 6             |

|   | Rated operational voltage<br>$U_e$ | Switching type | Rated switching distance<br>$S_n$<br>mm | For connection of:                           | Description                                    | Type of light              | Part no.<br>Article no.    | Price<br>see price list | Std. pack  |
|---|------------------------------------|----------------|---|--|--|----------------------------|----------------------------|-------------------------|--|
| <b>Comet series</b>   |                                    |                |   |  |  |                            |                            |                         |  |
| M18 x 1, Light/dark switching adjustable, Insulated material                        |                                    |                |   |  |  |                            |                            |                         |  |
| 4-wire  |                                    |                |   |  |  |                            |                            |                         |  |
| Thru-beam photoelectric sensor, Beam: straight                                      |                                    |                |   |  |  |                            |                            |                         |  |
|    | 10 - 30 V DC                       | NPN<br>PNP     | 6000                                    | 2 m connection cable                         | Detector (for combination with source)         | Visible red                | 12100A6517<br>135567       |                         | 1 off<br>      |
|   |                                    |                |   | Plug-in connection M12 x 1                   |  |                            | 12100AQD07<br>135569       |                         |  |
|   |                                    |                | 24000                                   | 2 m connection cable                         |  |                            | 12102A6517<br>135575       |                         |  |
|   |                                    |                |   | Plug-in connection M12 x 1                   |  |                            | 12102AQD07<br>135577       |                         |  |
|   | 6000                               | NPN<br>PNP     | 6000                                    | 2 m connection cable                         | Source (for combination with detector)         | Visible red                | 11100A6517<br>135555       |                         | 1 off<br>      |
|   |                                    |                |   | Plug-in connection M12 x 1                   |  |                            | 11100AQD07<br>135557       |                         |  |
|   |                                    |                | 24000                                   | 2 m connection cable                         |  |                            | 11102A6517<br>135563       |                         |  |
|   |                                    |                |   | Plug-in connection M12 x 1                   |  |                            | 11102AQD07<br>135565       |                         |  |
| Thru-beam photoelectric sensor, Beam: right-angled                                  |                                    |                |   |  |  |                            |                            |                         |  |
|    | 10 - 30 V DC                       | NPN<br>PNP     | 6000                                    | 2 m connection cable                         | Detector (for combination with source)         | Visible red                | 12100R6517<br>135571       |                         | 1 off<br>      |
|   |                                    |                |   | Plug-in connection M12 x 1                   |  |                            | 12100RQD07<br>135573       |                         |  |
|   |                                    |                |   | 2 m connection cable                         | Source (for combination with detector)         | Visible red                | 11100R6517<br>135559       |                         |  |
|   |                                    |                |   |  |  |                            | Plug-in connection M12 x 1 |                         |  |
| Reflex photoelectric sensor, Beam: right-angled                                     |                                    |                |   |  |  |                            |                            |                         |  |
|  | 10 - 30 V DC                       | NPN<br>PNP     | 3000                                    | 2 m connection cable                         | Polarized light for combination with reflector | Visible red                | 14101R6517<br>135651       |                         | 1 off<br>  |
|   |                                    |                |   | Plug-in connection M12 x 1                   |  |                            | 14101RQD07<br>135653       |                         |  |
|   |                                    |                | 4500                                    | non-polarized for combination with reflector | Visible red                                    | 14102R6517<br>135659       |                            |                         |  |
|   |                                    |                |   |  |  | Plug-in connection M12 x 1 | 14102RQD07<br>135661       |                         |  |
| Reflex photoelectric sensor, Beam: straight   |                                    |                |   |  |  |                            |                            |                         |  |
|  | 10 - 30 V DC                       | NPN<br>PNP     | 4500                                    | 2 m connection cable                         | Polarized light for combination with reflector | Visible red                | 14101A6517<br>135647       |                         | 1 off<br>  |
|   |                                    |                |   | Plug-in connection M12 x 1                   |  |                            | 14101AQD07<br>135649       |                         |  |
|   |                                    |                | 7600                                    | non-polarized for combination with reflector | Infra-red                                      | 14100A6517<br>135643       |                            |                         |  |
|   |                                    |                |   |  |  | Plug-in connection M12 x 1 | 14100AQD07<br>135645       |                         |  |
|   |                                    |                | 2 m connection cable                    | Visible red                                  | 14102A6517<br>135655                           |                            |                            |                         |  |
|   |                                    |                |   |  | Plug-in connection M12 x 1                     | 14102AQD07<br>135657       |                            |                         |  |

Information relevant for export to North America






|                      |  |
|----------------------|--|
| Product Standards    | UL 508; CSA-C22.2 No. 14; IEC60947-5-2; CE marking |
| UL File No.          | E117028  |
| UL CCN               | NRKH, NRKH7  |
| CSA File No.         | 50513  |
| CSA Class No.        | 3211-07  |
| NA Certification     | UL listed, CSA certified                           |
| Max. Voltage Rating  | 30 V DC  |
| Degree of Protection | IEC: IP68, IP69K; UL/CSA Type: 1, 4, 6             |

WWW.TM2A.PT info@tm2a.pt

WWW.TM2A.PT info@tm2a.pt





|   | Rated operational voltage<br>$U_e$ | Switching type                                     | Rated switching distance<br>$S_n$<br>mm | For connection of:         | Description   | Type of light | Part no.<br>Article no.                    | Price<br>see price list | Std. pack  |
|---|------------------------------------|--|---|----------------------------|---|---------------|--|-------------------------|--|
| <b>Comet series</b>   |                                    |  |   |                            |   |               |  |                         |  |
| M18 x 1, Light/dark switching adjustable, Insulated material                      |                                    |  |   |                            |   |               |  |                         |  |
| Reflected-light beam, Beam: straight  |                                    |  |   |                            |   |               |  |                         |  |
|  | 10 - 30 V DC                       | NPN<br>PNP   | 40                                      | 2 m connection cable       | with background suppression (Perfect Prox)                      | Visible red   | 13102A6517                                 |                         | 1 off<br>  |
|   |                                    |  |   | Plug-in connection M12 x 1 |   |               | 13102AQD07                                 |                         |  |
|   |                                    |  | 50                                      | 2 m connection cable       | with background suppression (Perfect Prox)                      | Visible red   | 13104A6517                                 |                         |  |
|   |                                    |  |   | Plug-in connection M12 x 1 |   |               | 13104AQD07                                 |                         |  |
|   |                                    |  |   | 2 m connection cable       | with background suppression (Perfect Prox)<br>Fine Spot Sensors |               | 13105A6517                                 |                         |  |
|   |                                    |  |   | Plug-in connection M12 x 1 |   |               | 13105AQD07                                 |                         |  |
|   |                                    |  | 100                                     | 2 m connection cable       | with background suppression (Perfect Prox)                      | Infra-red     | 13101A6517                                 |                         |  |
|   |                                    |  |   | Plug-in connection M12 x 1 |   |               | 13101AQD07                                 |                         |  |
|   |                                    |  | 150                                     | 2 m connection cable       | Detection of transparent objects                                |               | 13107AS6517                                |                         |  |
|   |                                    |  |   | Plug-in connection M12 x 1 |   |               | 13107ASQD07                                |                         |  |
|   |                                    |  |   | 2 m connection cable       |   |               | with background suppression (Perfect Prox) | 13108A6517              |  |
|   |                                    |  | Plug-in connection M12 x 1              | 13108AQD07                 |   |               |  |                         |  |
|   |                                    |  | 200                                     | 2 m connection cable       | Expandable with fiber optic cable →<br>Accessories              |               | 13106A6517                                 |                         |  |
|   |                                    |  |   | Plug-in connection M12 x 1 |   |               | 13106AQD07                                 |                         |  |
| 225   | 2 m connection cable               | with background suppression (Perfect Prox)         |   | 13103A6517                 |   |               |  |                         |  |
|   | Plug-in connection M12 x 1         |  |   | 13103AQD07                 |   |               |  |                         |  |
| 610   | 2 m connection cable               | Expandable with fiber optic cable →<br>Accessories |   | 13100A6517                 |   |               |  |                         |  |
|   | Plug-in connection M12 x 1         |  |   | 13100AQD07                 |   |               |  |                         |  |

## Information relevant for export to North America



|                      |  |
|----------------------|--|
| Product Standards    | UL 508; CSA-C22.2 No. 14; IEC60947-5-2; CE marking |
| UL File No.          | E117028  |
| UL CCN               | NRKH, NRKH7  |
| CSA File No.         | 50513  |
| CSA Class No.        | 3211-07  |
| NA Certification     | UL listed, CSA certified                           |
| Max. Voltage Rating  | 30 V DC  |
| Degree of Protection | IEC: IP68, IP69K; UL/CSA Type: 1, 4, 6             |

|   | Rated operational voltage<br>$U_e$ | Switching type | Rated switching distance<br>$S_n$<br>mm | For connection of:         | Description                                   | Type of light | Part no.<br>Article no. | Price<br>see price list | Std. pack  |
|---|------------------------------------|----------------|---|----------------------------|---|---------------|-------------------------|-------------------------|--|
| <b>Comet series</b>   |                                    |                |   |                            |   |               |                         |                         |  |
| M18 x 1, Light/dark switching adjustable, Insulated material                      |                                    |                |   |                            |   |               |                         |                         |  |
|  | 10 - 30 V DC                       | NPN<br>PNP     | 50                                      | 2 m connection cable       | with background suppression<br>(Perfect Prox) | Visible red   | 13104R6517<br>135607    |                         | 1 off<br> |
|   |                                    |                |   | Plug-in connection M12 x 1 |   |               | 13104RQD07<br>135609    |                         |  |
|   |                                    |                | 100                                     | Plug-in connection M12 x 1 |   | Infra-red     | 13104RS5007<br>135611   |                         |  |
|   |                                    |                |   | 2 m connection cable       |   |               | 13104RS5020<br>135613   |                         |  |
|   |                                    |                | 150                                     | 2 m connection cable       | Detection of transparent objects              | Infra-red     | 13107RS6517<br>135631   |                         |  |
|   |                                    |                |   | Plug-in connection M12 x 1 |   |               | 13107RSQD07<br>135633   |                         |  |
|   |                                    |                |   | 2 m connection cable       | with background suppression<br>(Perfect Prox) |               | 13108R6517<br>135639    |                         |  |
|   |                                    |                |   | Plug-in connection M12 x 1 |   |               | 13108RQD07<br>135641    |                         |  |
|   |                                    |                | 200                                     | 2 m connection cable       |   |               | 13106R6517<br>135623    |                         |  |
|   |                                    |                |   | Plug-in connection M12 x 1 |   |               | 13106RQD07<br>135625    |                         |  |
|   |                                    |                | 225                                     | 2 m connection cable       | with background suppression<br>(Perfect Prox) |               | 13103R6517<br>135599    |                         |  |
|   |                                    |                |   | Plug-in connection M12 x 1 |   |               | 13103RQD07<br>135601    |                         |  |
|   |                                    |                | 610                                     | 2 m connection cable       |   |               | 13100R6517<br>135583    |                         |  |
|   |                                    |                |   | Plug-in connection M12 x 1 |   |               | 13100RQD07<br>135585    |                         |  |

## Information relevant for export to North America



|                      |  |
|----------------------|--|
| Product Standards    | UL 508; CSA-C22.2 No. 14; IEC60947-5-2; CE marking |
| UL File No.          | E117028  |
| UL CCN               | NRKH, NRKH7  |
| CSA File No.         | 50513  |
| CSA Class No.        | 3211-07  |
| NA Certification     | UL listed, CSA certified                           |
| Max. Voltage Rating  | 30 V DC  |
| Degree of Protection | IEC: IP68, IP69K; UL/CSA Type: 1, 4, 6             |

## Description



### Short Description

Eaton's Plastic Fiber Optic Cables from offer a lower-cost alternative to glass fibers.











Single fiber optic cable is normally used for thru-beam sensing and duplex fiber optic cable (two isolated cables running in parallel) for diffuse reflective.























Pre-assembled fiber optic cables are special purpose cables to solve a variety of fiber optic sensing applications.

### Product Features

- Fiber optic cables allow remote sensing in areas where space is restricted or tight viewing angles are required
- Single cable styles are ideal for thru-beam sensing.
- Duplex fiber optic cable styles are typically used for diffuse reflective sensing
- Pre-assembled cables are available in 0.5 mm for sensing extremely small targets

## Ordering


|   | Design (outer dimensions)<br>mm | Material | Sheathing       | Part no.<br>Article no.     | Price<br>see price<br>list | Std. pack |
|---|---------------------------------|----------|-----------------|-----------------------------|----------------------------|-----------|
| <b>Glass fibre-Component adapter</b>  |                                 |          |                 |                             |                            |           |
| In combination with reflex sensors 13106A... or 13100A... and E51KF fiber optic     |                                 |          |                 |                             |                            |           |
|    | -                               | Metal    | -               | <b>6235A-6501</b><br>135759 |                            | 1 off     |
| <b>Glass fiber duplex cable</b>   |                                 |          |                 |                             |                            |           |
|    | 2.4 Ø x 914                     | -        | PVC             | <b>E51KF163</b><br>135761   |                            | 1 off     |
|   | 2.4 Ø x 914                     | -        | Stainless steel | <b>E51KF563</b><br>135783   |                            |           |
|    | 1.6 Ø x 914                     | -        | PVC             | <b>E51KF183</b><br>135763   |                            |           |
|   | 1.6 Ø x 914                     | -        | Stainless steel | <b>E51KF583</b><br>135785   |                            |           |
|    | 0.5 x 3.9 Ø x 914               | -        | PVC             | <b>E51KF193</b><br>135764   |                            |           |
|   | 0.5 x 3.9 Ø x 914               | -        | Stainless steel | <b>E51KF593</b><br>135786   |                            |           |
|   | 3.2 Ø x 914                     | -        | PVC             | <b>E51KF323</b><br>135771   |                            |           |
|   | 3.2 Ø x 914                     | -        | Stainless steel | <b>E51KF723</b><br>135793   |                            |           |
|   | 3.2 Ø x 914                     | -        | PVC             | <b>E51KF313</b><br>135770   |                            |           |
|   | 3.2 Ø x 914                     | -        | Stainless steel | <b>E51KF713</b><br>135792   |                            |           |
|  | 0.8 x 9.7 Ø x 914               | -        | PVC             | <b>E51KF343</b><br>135773   |                            |           |
|   | 0.8 x 9.7 Ø x 914               | -        | Stainless steel | <b>E51KF743</b><br>135795   |                            |           |
|  | 0.5 x 3.9 Ø x 914               | -        | Stainless steel | <b>E51KF553</b><br>135782   |                            |           |
|   | 0.5 x 3.9 Ø x 914               | -        | PVC             | <b>E51KF153</b><br>135760   |                            |           |
|  | 1.6 Ø x 914                     | -        | Stainless steel | <b>E51KF573</b><br>135784   |                            |           |
|   | 3.2 Ø x 914                     | -        | Stainless steel | <b>E51KF733</b><br>135794   |                            |           |
|   | 1.6 Ø x 914                     | -        | PVC             | <b>E51KF173</b><br>135762   |                            |           |
|   | 3.2 Ø x 914                     | -        | PVC             | <b>E51KF333</b><br>135772   |                            |           |
|  | 3.2 Ø x 914                     | -        | Stainless steel | <b>E51KF7A3</b><br>135796   |                            |           |
|   | 3.2 Ø x 914                     | -        | PVC             | <b>E51KF3A3</b><br>135774   |                            |           |
|  | 3.2 Ø x 914                     | -        | Stainless steel | <b>E51KF7B3</b><br>135797   |                            |           |
|   | 3.2 Ø x 914                     | -        | PVC             | <b>E51KF3B3</b><br>135775   |                            |           |

|   | Design (outer dimensions)<br>mm | Material        | Sheathing       | Part no.<br>Article no.     | Price<br>see price<br>list | Std. pack |
|---|---------------------------------|-----------------|-----------------|-----------------------------|----------------------------|-----------|
| <b>Glass fiber simplex cable</b>  |                                 |                 |                 |                             |                            |           |
|    | 2.4 Ø x 914                     | -               | Stainless steel | <b>E51KF663</b><br>135788   |                            | 1 off     |
|   | 2.4 Ø x 914                     | -               | PVC             | <b>E51KF263</b><br>135766   |                            |           |
|    | 1.6 Ø x 914                     | -               | Stainless steel | <b>E51KF683</b><br>135790   |                            |           |
|   | 1.6 Ø x 914                     | -               | PVC             | <b>E51KF283</b><br>135768   |                            |           |
|    | 0.5 x 3.9 Ø x 914               | -               | Stainless steel | <b>E51KF693</b><br>135791   |                            |           |
|    | 3.2 Ø x 914                     | -               | Stainless steel | <b>E51KF823</b><br>135799   |                            |           |
|    | 3.2 Ø x 914                     | -               | PVC             | <b>E51KF423</b><br>135777   |                            |           |
|    | 0.5 x 3.9 Ø x 914               | -               | PVC             | <b>E51KF293</b><br>135769   |                            |           |
|   | 3.2 Ø x 914                     | -               | Stainless steel | <b>E51KF813</b><br>135798   |                            |           |
|  | 3.2 Ø x 914                     | -               | PVC             | <b>E51KF413</b><br>135776   |                            |           |
|  | 0.8 x 9.7 Ø x 914               | -               | Stainless steel | <b>E51KF843</b><br>135801   |                            |           |
|  | 0.8 x 9.7 Ø x 914               | -               | PVC             | <b>E51KF443</b><br>135779   |                            |           |
|  | 0.5 x 3.9 Ø x 914               | -               | Stainless steel | <b>E51KF653</b><br>135787   |                            |           |
|  | 0.5 x 3.9 Ø x 914               | -               | PVC             | <b>E51KF253</b><br>135765   |                            |           |
|  | 1.6 Ø x 914                     | -               | Stainless steel | <b>E51KF673</b><br>135789   |                            |           |
|  | 3.2 Ø x 914                     | -               | Stainless steel | <b>E51KF833</b><br>135800   |                            |           |
|  | 1.6 Ø x 914                     | -               | PVC             | <b>E51KF273</b><br>135767   |                            |           |
|  | 3.2 Ø x 914                     | -               | PVC             | <b>E51KF433</b><br>135778   |                            |           |
|  | 3.2 Ø x 914                     | -               | Stainless steel | <b>E51KF8A3</b><br>135802   |                            |           |
|  | 3.2 Ø x 914                     | -               | PVC             | <b>E51KF4A3</b><br>135780   |                            |           |
|  | 3.2 Ø x 914                     | -               | Stainless steel | <b>E51KF8B3</b><br>135803   |                            |           |
|  | 3.2 Ø x 914                     | -               | PVC             | <b>E51KF4B3</b><br>135781   |                            |           |
| <b>Safety bar</b>   |                                 |                 |                 |                             |                            |           |
|  | -                               | Metal           | -               | <b>E58KS5200</b><br>135757  |                            | 1 off     |
| <b>Fixing bracket</b>   |                                 |                 |                 |                             |                            |           |
|  | 53 x 44                         | Stainless steel | -               | <b>6161AS5296</b><br>135738 |                            | 1 off     |
|  | 53 x 44                         | Stainless steel | -               | <b>6161AS5297</b><br>135739 |                            | 1 off     |

Engineering


Circuit diagrams

AC/DC Models (AC Connection)

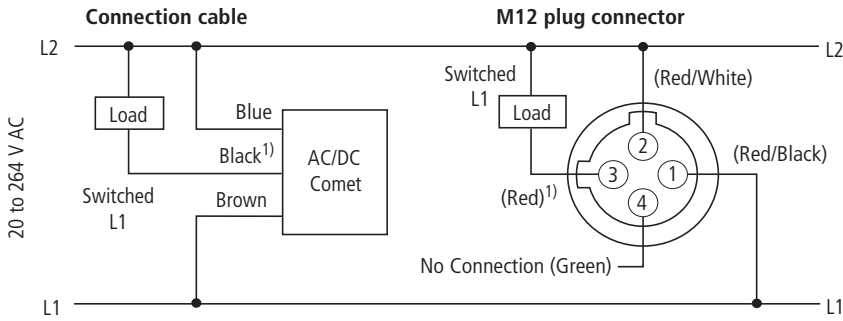


1) Note: Cable not connected on source of thru-beam sensors.

AC/DC Models (DC Connection)

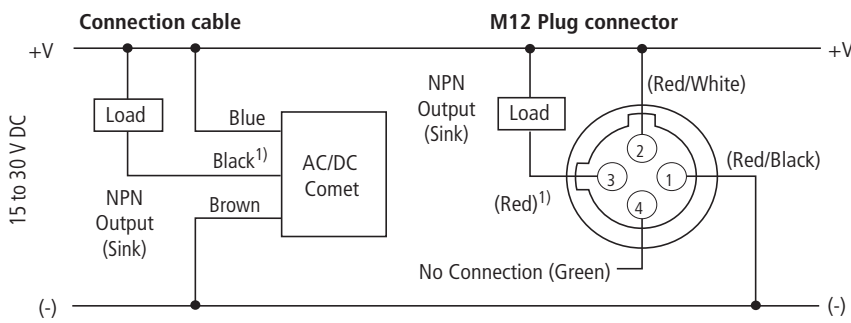

1) Note: Cable not connected on source of thru-beam sensors.

DC Models (DC Connection)

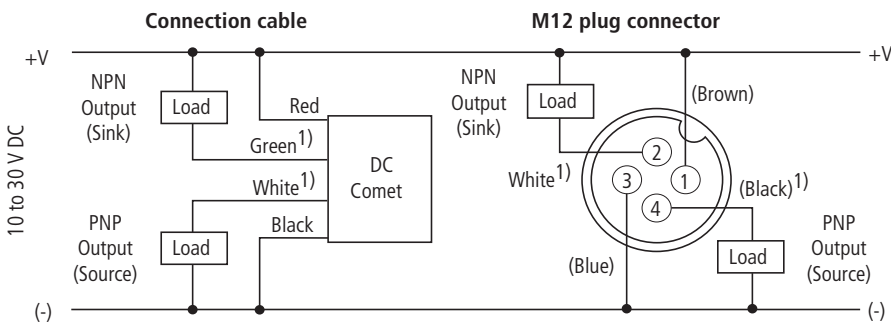

1) Note: Cable not connected on source of thru-beam sensors.

**Note:** AC/DC sensors have AC plug connectors. Take into account when using with DC voltage.

WWW.TM2A.PT info@tm2a.pt


WWW.TM2A.PT info@tm2a.pt



Excess gain chart


**Thru-beam photoelectric sensor**

- ① Detector 12100A and 12100R with source 11100A or 11100R
- ② Detector 12102A with source 11102A

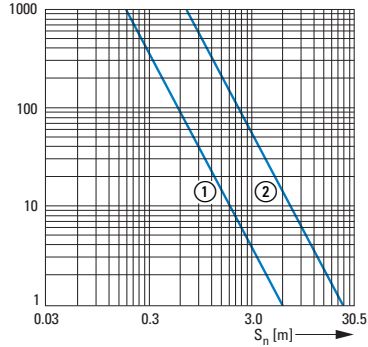



**Retroreflective sensing sensor (84-mm-Reflector)**

- ① 14100A/14102A
- ② 14102R
- ③ 14101A
- ④ 14101R

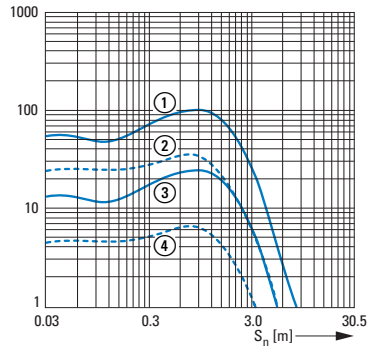

**Diffuse reflective sensor (90% reflex test card)**

- ⑤ 13107
- ⑥ 13100
- ⑦ 13106


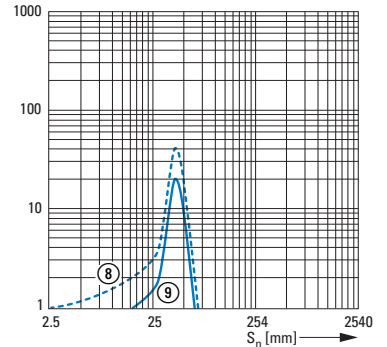
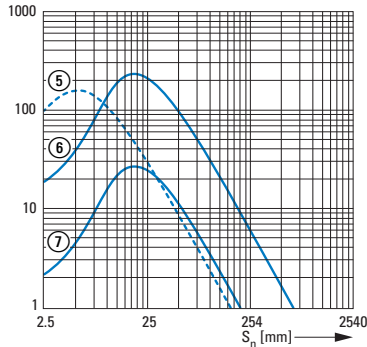


**Focused diffuse reflective sensor (90% reflex test card)**

- ⑧ 13102A typ.
- ⑨ 13102A minimum

**Perfect Prox®**


- ① 13108A/13108R
- ② 13104A
- ③ 14104RS
- ④ 13103A/13103R
- ⑤ 13101A typ.
- ⑥ 13101A minimum
- ⑦ 13102A typ.
- ⑧ 13102A min.
- ⑨ 13105A typ.
- ⑩ 13105A minimum

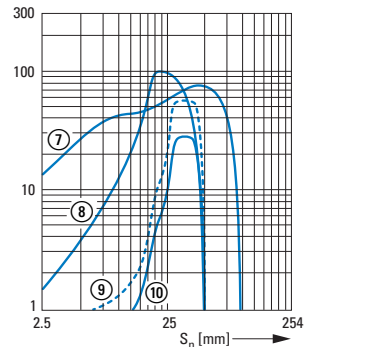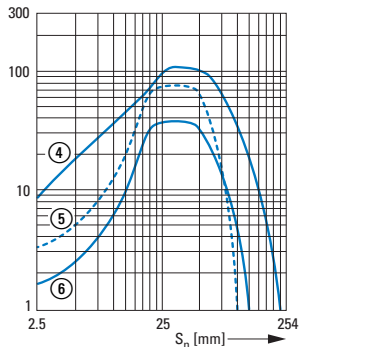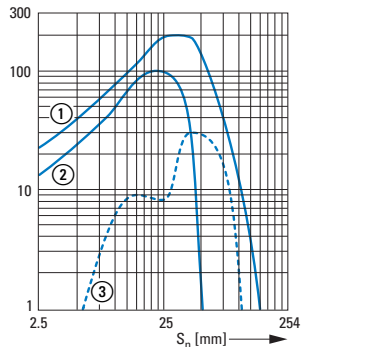

**Fibre optic sensors**


**Thru-beam photoelectric sensor**

- With single FO cable E51KF823
- ① 13100A Comet
- ② 13106A Comet

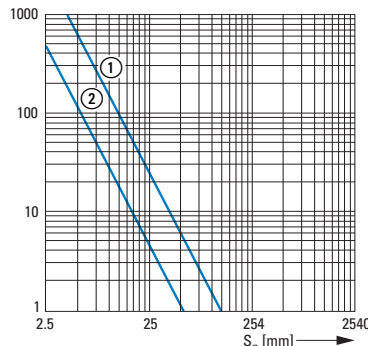

**Diffuse reflective sensor**

- With duplex FO cable E51KF723
- ③ 13100A Comet
- ④ 13106A Comet

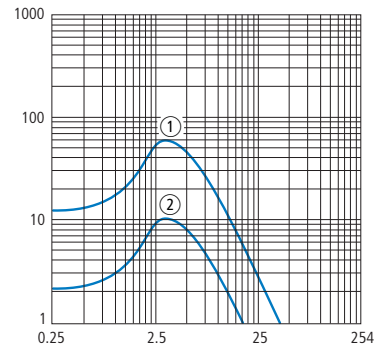

## Technical data


|  |                |                | 3-wire<br>111-Part no.  | 121 Part no.                  | 131-Part no.                  | 141-Part no.                  |
|--|----------------|----------------|---|-------------------------------|-------------------------------|-------------------------------|
| <b>General</b>                                     |                |                |   |                               |                               |                               |
| Standards  |                |                | IEC/EN 60947-5-2  |                               |                               |                               |
| Ambient temperature                                |                | °C             | - 20 - + 70   | - 20 - + 70                   | - 40 - + 70                   | - 40 - + 70                   |
| Protection type                                    |                |                | IP67  | IP67                          | IP67                          | IP67                          |
| Mechanical shock resistance                        |                | g              | 100<br>Shock duration 3 ms  |                               |                               |                               |
| <b>Characteristics</b>                             |                |                |   |                               |                               |                               |
| Rated operational voltage                          |                | U <sub>e</sub> | 20 - 264 V AC<br>15 - 30 V DC   | 20 - 264 V AC<br>15 - 30 V DC | 20 - 264 V AC<br>15 - 30 V DC | 20 - 264 V AC<br>15 - 30 V DC |
| Operating current in the switched state at 24 V DC | I <sub>b</sub> | mA             | 30  | 30                            | 30                            | 30                            |
| Maximum load current                               | I <sub>e</sub> | mA             | < 300   | < 300                         | < 300                         | < 300                         |
| Response time                                      |                | ms             | 10  | 10                            | 10                            | 10                            |
| Switching state display                            |                | LED            | Red   | Red                           | Red                           | Red                           |
| Operating voltage display                          |                | LED            | -   | -                             | -                             | -                             |
| Protective functions                               |                |                | Short-circuit protective device<br>Protection against polarity reversal |                               |                               |                               |
| Connection   |                |                | 3-wire  | 3-wire                        | 3-wire                        | 3-wire                        |
| Design (outer dimensions)                          |                | mm             | M18 x 1   | M18 x 1                       | M18 x 1                       | M18 x 1                       |
| For connection of:                                 |                |                | 2 m connection cable  |                               |                               |                               |
| Material   |                |                | Insulated material  |                               |                               |                               |

|  |                |                | 4-wire<br>111-Part no.  | 121 Part no.                       | 131-Part no.                       | 141-Part no.                       |
|--|----------------|----------------|---|------------------------------------|------------------------------------|------------------------------------|
| <b>General</b>                                     |                |                |   |                                    |                                    |                                    |
| Standards  |                |                | IEC/EN 60947-5-2  |                                    |                                    |                                    |
| Ambient temperature                                |                | °C             | - 20 - + 70   | - 20 - + 70                        | - 40 - + 70                        | - 40 - + 70                        |
| Protection type                                    |                |                | IP67  | IP67                               | IP67                               | IP67                               |
| Mechanical shock resistance                        |                | g              | 100<br>Shock duration 3 ms  |                                    |                                    |                                    |
| <b>Characteristics</b>                             |                |                |   |                                    |                                    |                                    |
| Rated operational voltage                          |                | U <sub>e</sub> | 10 - 30 V DC  | 10 - 30 V DC                       | 10 - 30 V DC                       | 10 - 30 V DC                       |
| Operating current in the switched state at 24 V DC | I <sub>b</sub> | mA             | 25  | 30                                 | 30                                 | 30                                 |
| Maximum load current                               | I <sub>e</sub> | mA             | PNP: 100<br>NPN: 250 (120 > 55 °C)                                      | PNP: 100<br>NPN: 250 (120 > 55 °C) | PNP: 100<br>NPN: 250 (120 > 55 °C) | PNP: 100<br>NPN: 250 (120 > 55 °C) |
| Response time                                      |                | ms             | 3.5   | 3.5                                | 1                                  | 1                                  |
| Switching state display                            |                | LED            | -   | Red                                | Red                                | Red                                |
| Operating voltage display                          |                | LED            | red   | -                                  | -                                  | -                                  |
| Protective functions                               |                |                | Short-circuit protective device<br>Protection against polarity reversal |                                    |                                    |                                    |
| Connection   |                |                | 4-wire  | 4-wire                             | 4-wire                             | 4-wire                             |
| Design (outer dimensions)                          |                | mm             | M18 x 1   | M18 x 1                            | M18 x 1                            | M18 x 1                            |
| For connection of:                                 |                |                | 2 m connection cable  |                                    |                                    |                                    |
| Material   |                |                | Insulated material  |                                    |                                    |                                    |

## Notes


Further technical data can be found in the Online Catalog at <http://de.ecat.moeller.net>

Dimensions

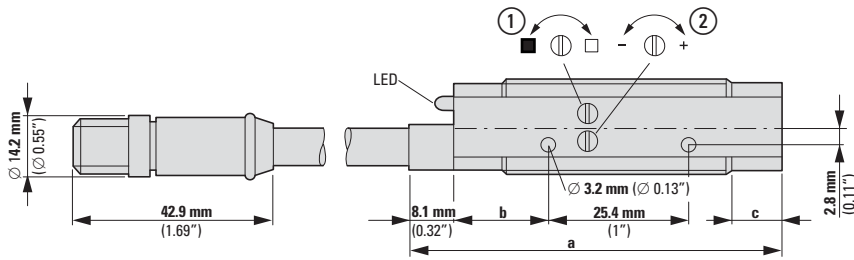

- ① Brightness setting
- ② Gain adjustment

| Type                                       | a_x<br>mm (inch)_x | b_x<br>mm (inch)_x | c_x<br>mm (inch)_x | d_x<br>mm (inch)_x | Settings     |        | Enclosure style |
|--|--------------------|--------------------|--------------------|--------------------|--------------|--------|-----------------|
|  |                    |                    |                    |                    | ① Light/dark | ② Gain |                 |
| 11100A...                                  | 56 (2.2)           | 17 (0.67)          | 6 (0.24)           | -                  | -            | -      | 2               |
| 11100R...                                  | 65 (2.56)          | 17 (0.67)          | 15 (0.59)          | 5 (0.197)          | -            | -      | 4               |
| 11102A...                                  | 70 (2.78)          | 17 (0.67)          | 28 (1.10)          | -                  | -            | -      | 1               |
| 12100A...                                  | 56 (2.2)           | 17 (0.67)          | 6 (0.24)           | -                  | x            | x      | 2               |
| 12100R...                                  | 65 (2.56)          | 17 (0.67)          | 15 (0.59)          | 5 (0.197)          | x            | x      | 4               |
| 12102A...                                  | 66 (2.60)          | 15 (0.59)          | 7 (0.28)           | -                  | x            | x      | 1               |
| 13100A..., 13106A...                       | 56 (2.2)           | 17 (0.67)          | 6 (0.24)           | -                  | x            | x      | 2               |
| 13100R..., 13106R...                       | 65 (2.56)          | 17 (0.67)          | 15 (0.59)          | 5 (0.197)          | x            | x      | 4               |
| 13101A..., 13104A...                       | 66 (2.60)          | 15 (0.59)          | 6 (0.24)           | -                  | x            | -      | 1               |
| 13102A..., 13103A..., 13105A..., 13108A... | 66 (2.60)          | 15 (0.59)          | 6 (0.24)           | -                  | x            | x      | 1               |
| 13104R...                                  | 77 (3.03)          | 15 (0.59)          | 28 (1.10)          | 5 (0.197)          | x            | -      | 6               |
| 14100A..., 14102A...                       | 66 (2.60)          | 15 (0.59)          | 7 (0.28)           | -                  | x            | x      | 1               |
| 14101R..., 14102R...                       | 76 (2.99)          | 15 (0.59)          | 18 (0.71)          | 5 (0.197)          | x            | x      | 5               |
| 14101A...                                  | 67 (2.64)          | 15 (0.59)          | 7 (0.28)           | -                  | x            | x      | 1               |
| 15100A..., 15101A...                       | 73 (2.87)          | 15 (0.59)          | 15 (0.59)          | -                  | x            | x      | 3               |

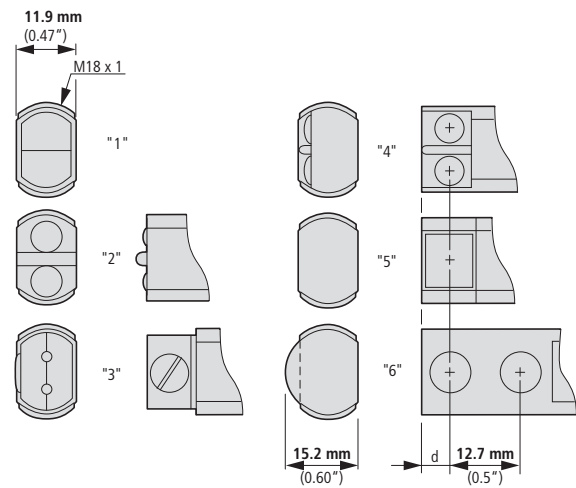


Enclosure style


| Type  | S_xn_x<br>mm (inch)_x |
|---|-----------------------|
| 13104A..., 13104R6..., 13104RQ..., 131055_x | 50 (1.97)             |
| 13104RS..., 13101..._X                      | 100 (3.94)            |
| 13107..., 13108...                          | 150 (5.91)            |
| 13106...                                    | 200 (7.87)            |
| 13103...                                    | 225 (8.86)            |
| 13100...                                    | 610 (24.02)           |
| 14101R...                                   | 3000 (118.11)         |
| 14101A..., 14102R..._x                      | 4500 (177.17)         |
| 11100..., 12100...                          | 6000 (236.22)         |
| 14100A..., 14102A...                        | 7600 (299.21)         |
| 11102..., 12102...                          | 24000 (944.88)        |

Glass fiber duplex cable


E51KF313  
E51KF713

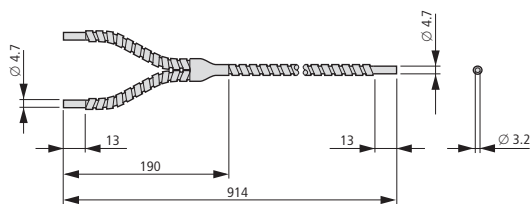


E51KF3B3  
E51KF7B3

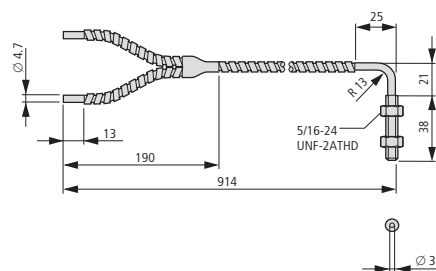


E51KF333  
E51KF733

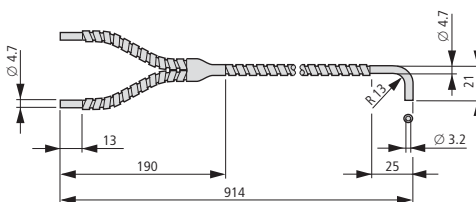


E51KF163  
E51KF563

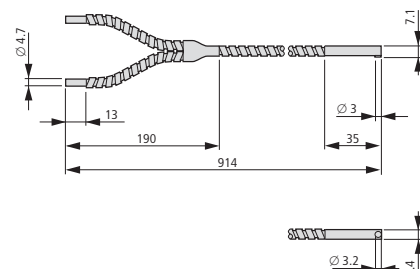


E51KF323  
E51KF723

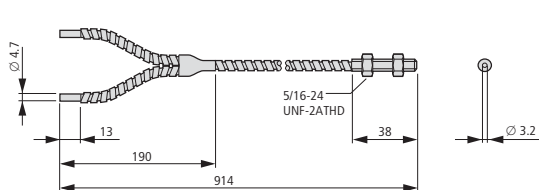


E51KF183  
E51KF583

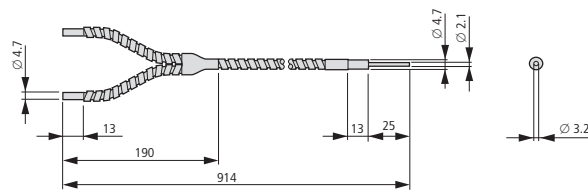


E51KF193  
E51KF593

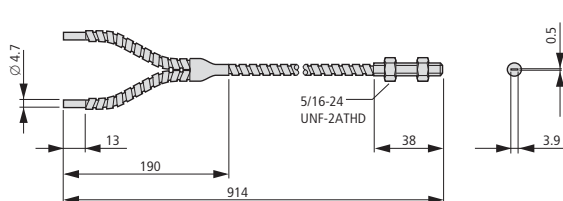

E51KF173  
E51KF573

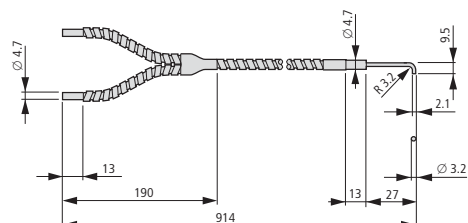


E51KF3A3  
E51KF7A3

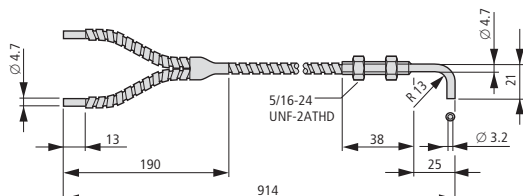

E51KF343  
E51KF743



E51KF153  
E51KF553

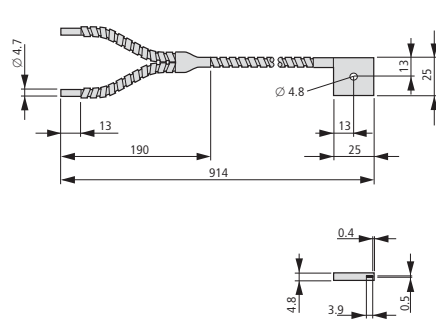


WWW.TM2A.PT info@tm2a.pt


WWW.TM2A.PT info@tm2a.pt

Glass fiber simplex cable


E51KF413  
E51KF813

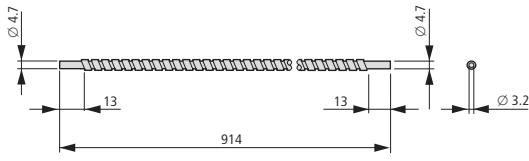


E51KF4B3  
E51KF8B3

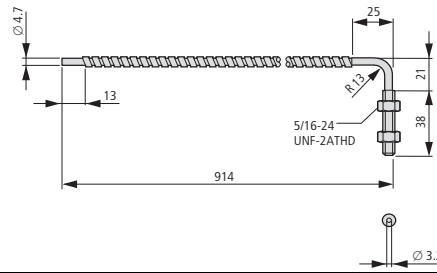


E51KF433  
E51KF833

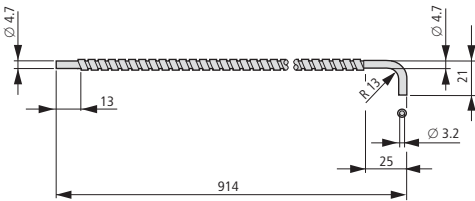


E51KF263  
E51KF663

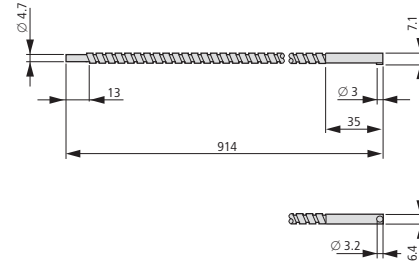


E51KF423  
E51KF823

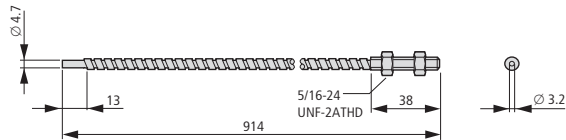


E51KF283  
E51KF683

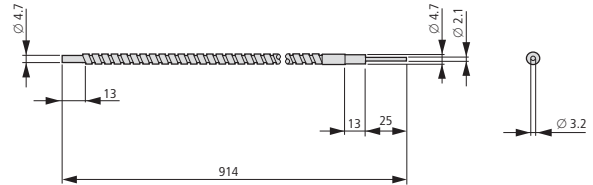


E51KF293  
E51KF693

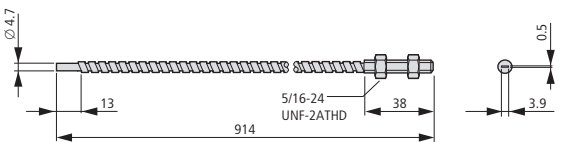

E51KF273  
E51KF673

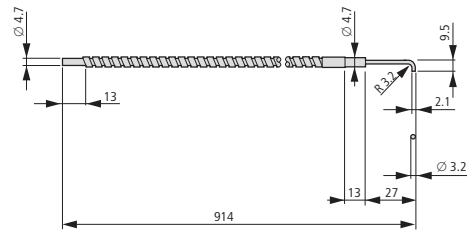


E51KF4A3  
E51KF8A3

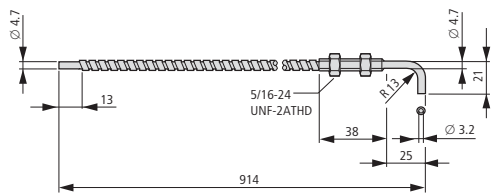

E51KF443  
E51KF843




E51KF253  
E51KF653

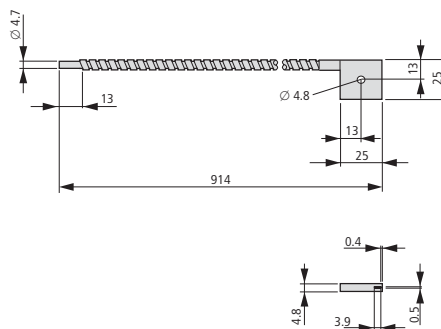


WWW.TM2A.PT info@tm2a.pt

WWW.TM2A.PT info@tm2a.pt


Safety bar, adjustable

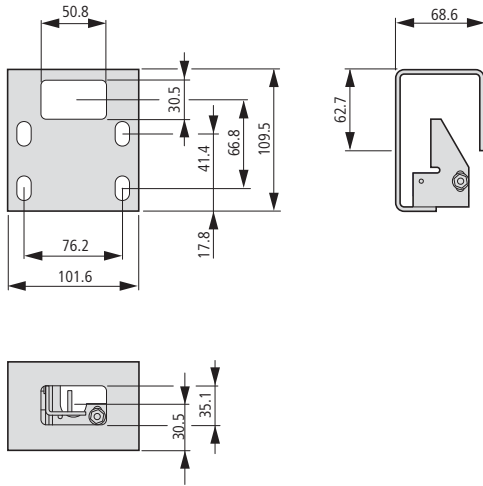

Clip-type fixing bracket, increased

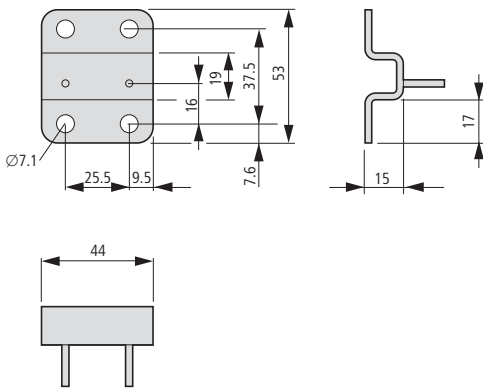

Clip-type fixing bracket, flat

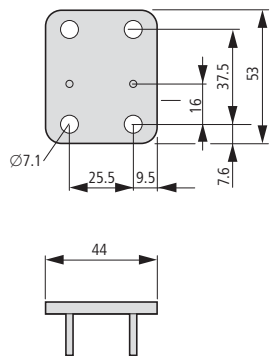

WWW.TM2A.PT info@tm2a.pt

WWW.TM2A.PT info@tm2a.pt



## Description



- ① Tempered Glass Lens Cover Protects Against Abrasion.
- ② Bright 360° function display.
- ③ All models with visible red light.
- ④ All models are available in versions with M12 (micro) plug connector.

### Short Description




Eaton's E58 series was designed to withstand harshest physical, chemical and optical environments. Stainless steel, PVDF and tempered glass components are mechanically assembled using Viton® seals to ensure complete sealing and resistance to industry chemicals. All adhesives and potting subject to failure from chemical attack have been eliminated from the design. The result is a sensor highly resistant to chemical attack and moisture intrusion, that can withstand heavy shock and vibration in almost any application. E58 Harsh Duty sensors feature unparalleled optical performance. They are ideal for automotive applications where exposure to lubricants, cutting fluids, coolants and glycols is common. For food processing applications, a smooth housing version simplifies high-pressure chemical washdowns. Furthermore it withstands the use of sanitizers, surfactants, and cleaning agents including diluted bases and acids.

### Product Features

- Sensor with a diameter of 18 mm and 30 mm.
- Highly refined optics for long sensing ranges and to see through high levels of contamination – unmatched optical performance
- Perfect Prox® technology provides exceptional background rejection and extremely high excess gain.
- Resistant to the wide range of chemicals used in the automotive, food processing and forest products industries
- Suitable for high temperature, high pressure washdown (82 bar).
- Mechanical Viton gaskets are resistant to extreme temperature variations.
- Visible sensing beam on all models lets you see where the beam is aimed for quick flush mounting and alignment.
- The function display is the brightest available and is visible from any angle and in any lighting condition
- The industry's only background suppression sensors with a 2-wire circuit design
- Four-wire DC sensors feature an NPN and a PNP output

### Approvals






| Con-<br>nection   | Design<br>(outer<br>dimen-<br>sions)<br>mm | Rated<br>operational<br>voltage<br>U <sub>e</sub> | Rated<br>switching<br>distance<br>S <sub>n</sub><br>mm | Switch-<br>ing type | Switching<br>principle | For connection of: | Type of<br>light              | Part no.<br>Article no. | Price<br>see<br>price<br>list | Std. pack  |
|---|--|---|--|---------------------|------------------------|--------------------|-------------------------------|-------------------------|-------------------------------|--|
| <b>E58</b>  |  |   |  |                     |                        |                    |                               |                         |                               |  |
| Stainless steel   |  |   |  |                     |                        |                    |                               |                         |                               |  |
| Reflected-light beam<br>with background suppression (Perfect Prox)                |  |   |  |                     |                        |                    |                               |                         |                               |  |
|  | 2-wire                                     | M18 x 1   | 18 - 50 V DC   | 50                  | -                      | Dark<br>switching  | Plug-in connection<br>M12 x 1 | Visible<br>red          |                               | 1 off<br>  |
|   |  |   |  |                     | -                      | Light<br>switching |                               |                         |                               |  |
|   |  |   |  |                     | -                      | Dark<br>switching  |                               |                         |                               |  |
|   |  |   |  |                     | -                      | Light<br>switching |                               |                         |                               |  |
|   |  |   |  |                     | -                      | Dark<br>switching  |                               |                         |                               |  |
|   |  |   |  |                     | -                      | Light<br>switching |                               |                         |                               |  |
| M30 x 1.5   | 150  | -   | Dark<br>switching                                      |                     |                        |                    |                               |                         |                               |  |
|   |  | -   | Light<br>switching                                     |                     |                        |                    |                               |                         |                               |  |
|   |  | -   | Dark<br>switching                                      |                     |                        |                    |                               |                         |                               |  |
|   |  | -   | Light<br>switching                                     |                     |                        |                    |                               |                         |                               |  |
|   |  | -   | Dark<br>switching                                      |                     |                        |                    |                               |                         |                               |  |
|   |  | -   | Light<br>switching                                     |                     |                        |                    |                               |                         |                               |  |

Information relevant for export to North America















Product Standards  
UL File No.  
UL CCN  
CSA File No.  
CSA Class No.  
NA Certification  
Max. Voltage Rating  
Degree of Protection

UL 508; CSA-C22.2 No. 14; IEC60947-5-2; CE marking  
E166051  
NRKH, NRKH7  
UL report applies to both Canada and US  
-  
UL listed, certified by UL for use in Canada  
50 V DC  
IEC: IP68, IP69K; UL/CSA Type: 1, 2, 3, 3R, 3S, 4, 4x, 6, 6P, 12, 12K, 13

| Con-<br>nection   | Design<br>(outer<br>dimen-<br>sions)<br>mm | Rated<br>operational<br>voltage<br>U <sub>e</sub> | Rated<br>switching<br>distance<br>S <sub>n</sub><br>mm | Switch-<br>ing type | Switching<br>principle | For connection of: | Type of<br>light              | Part no.<br>Article no. | Price<br>see<br>price<br>list | Std. pack  |
|---|--|---|--|---------------------|------------------------|--------------------|-------------------------------|-------------------------|-------------------------------|--|
| <b>E58</b>  |  |   |  |                     |                        |                    |                               |                         |                               |  |
| Stainless steel   |  |   |  |                     |                        |                    |                               |                         |                               |  |
| Reflected-light beam<br>with background suppression (Perfect Prox)                  |  |   |  |                     |                        |                    |                               |                         |                               |  |
|  | 4-wire                                     | M18 x 1   | 10 - 30 V DC   | 50                  | NPN<br>PNP             | Dark<br>switching  | 2 m connection<br>cable       | Visible<br>red          |                               | 1 off<br>  |
|   |  |   |  |                     |                        | Light<br>switching | Plug-in connection<br>M12 x 1 |                         |                               |  |
|   |  |   |  |                     |                        | Light<br>switching | 2 m connection<br>cable       |                         |                               |  |
|   |  |   |  |                     |                        | Light<br>switching | Plug-in connection<br>M12 x 1 |                         |                               |  |
|   |  |   |  |                     |                        | Dark<br>switching  | 2 m connection<br>cable       |                         |                               |  |
|   |  |   |  |                     |                        | Dark<br>switching  | Plug-in connection<br>M12 x 1 |                         |                               |  |
|   |  |   |  | 100                 | NPN<br>PNP             | Dark<br>switching  | 2 m connection<br>cable       |                         |                               |  |
|   |  |   |  |                     |                        | Dark<br>switching  | Plug-in connection<br>M12 x 1 |                         |                               |  |
|   |  |   |  |                     |                        | Light<br>switching | 2 m connection<br>cable       |                         |                               |  |
|   |  |   |  |                     |                        | Light<br>switching | Plug-in connection<br>M12 x 1 |                         |                               |  |
|   |  |   |  |                     |                        | Dark<br>switching  | 2 m connection<br>cable       |                         |                               |  |
|   |  |   |  |                     |                        | Dark<br>switching  | Plug-in connection<br>M12 x 1 |                         |                               |  |
| 150   | NPN<br>PNP                                 | Dark<br>switching                                 | 2 m connection<br>cable                                |                     |                        |                    |                               |                         |                               |  |
|   |  | Dark<br>switching                                 | Plug-in connection<br>M12 x 1                          |                     |                        |                    |                               |                         |                               |  |
|   |  | Light<br>switching                                | 2 m connection<br>cable                                |                     |                        |                    |                               |                         |                               |  |
|   |  | Light<br>switching                                | Plug-in connection<br>M12 x 1                          |                     |                        |                    |                               |                         |                               |  |
|   |  | Dark<br>switching                                 | 2 m connection<br>cable                                |                     |                        |                    |                               |                         |                               |  |
|   |  | Dark<br>switching                                 | Plug-in connection<br>M12 x 1                          |                     |                        |                    |                               |                         |                               |  |
| 280   | NPN<br>PNP                                 | Dark<br>switching                                 | 2 m connection<br>cable                                |                     |                        |                    |                               |                         |                               |  |
|   |  | Dark<br>switching                                 | Plug-in connection<br>M12 x 1                          |                     |                        |                    |                               |                         |                               |  |
|   |  | Light<br>switching                                | 2 m connection<br>cable                                |                     |                        |                    |                               |                         |                               |  |
|   |  | Light<br>switching                                | Plug-in connection<br>M12 x 1                          |                     |                        |                    |                               |                         |                               |  |
|   |  | Dark<br>switching                                 | 2 m connection<br>cable                                |                     |                        |                    |                               |                         |                               |  |
|   |  | Dark<br>switching                                 | Plug-in connection<br>M12 x 1                          |                     |                        |                    |                               |                         |                               |  |

WWW.TM2A.PT info@tm2a.pt

WWW.TM2A.PT info@tm2a.pt

| Connection  | Design (outer dimensions) mm | Rated operational voltage $U_e$ | Rated switching distance $S_n$ mm | Switching type | Switching principle | For connection of:                | Type of light | Part no. Article no.   | Price see price list   | Std. pack   |
|---|------------------------------|---------------------------------|-----------------------------------|----------------|---------------------|-----------------------------------|---------------|--|--|---|
| <b>E58</b>  |                              |                                 |                                   |                |                     |                                   |               |  |  |   |
| Stainless steel   |                              |                                 |                                   |                |                     |                                   |               |  |  |   |
| Reflex photoelectric sensor<br>Polarized light<br>for combination with reflector    |                              |                                 |                                   |                |                     |                                   |               |  |  |   |
|    | 4-wire                       | M30 x 1.5                       | 10 - 30 V DC                      | 10000          | NPN<br>PNP          | Dark switching<br>Light switching | Visible red   | 2 m connection cable<br>Plug-in connection M12 x 1<br>2 m connection cable<br>Plug-in connection M12 x 1 | <b>E58-30RP10-HD</b><br>135684<br><b>E58-30RP10-HDP</b><br>135685<br><b>E58-30RP10-HL</b><br>135686<br><b>E58-30RP10-HLP</b><br>135687     | 1 off       |
| Reflex photoelectric sensor<br>for combination with reflector                       |                              |                                 |                                   |                |                     |                                   |               |  |  |   |
|    | 4-wire                       | M30 x 1.5                       | 10 - 30 V DC                      | 18000          | NPN<br>PNP          | Dark switching<br>Light switching | Visible red   | 2 m connection cable<br>Plug-in connection M12 x 1<br>2 m connection cable<br>Plug-in connection M12 x 1 | <b>E58-30RS18-HD</b><br>135688<br><b>E58-30RS18-HDP</b><br>135689<br><b>E58-30RS18-HL</b><br>135690<br><b>E58-30RS18-HLP</b><br>135691     | 1 off       |
| Thru-beam photoelectric sensor<br>Detector (for combination with source)            |                              |                                 |                                   |                |                     |                                   |               |  |  |   |
|  | 4-wire                       | M30 x 1.5                       | 10 - 30 V DC                      | 250000         | NPN<br>PNP          | Dark switching<br>Light switching | -             | 2 m connection cable<br>Plug-in connection M12 x 1<br>2 m connection cable<br>Plug-in connection M12 x 1 | <b>E58-30TD250-HD</b><br>135692<br><b>E58-30TD250-HDP</b><br>135693<br><b>E58-30TD250-HL</b><br>135694<br><b>E58-30TD250-HLP</b><br>135695 | 1 off   |
| Thru-beam photoelectric sensor<br>Source (for combination with detector)            |                              |                                 |                                   |                |                     |                                   |               |  |  |   |
|  | 4-wire                       | M30 x 1.5                       | 10 - 30 V DC                      | 250000         | NPN<br>PNP          | -<br>-                            | Visible red   | 2 m connection cable<br>Plug-in connection M12 x 1   | <b>E58-30TS250-HA</b><br>135696<br><b>E58-30TS250-HAP</b><br>135697  | 1 off   |

Information relevant for export to North America




Product Standards  
UL File No.  
UL CCN  
CSA File No.  
CSA Class No.  
NA Certification  
Max. Voltage Rating  
Degree of Protection

UL 508; CSA-C22.2 No. 14; IEC60947-5-2; CE marking  
E166051  
NRKH, NRKH7  
UL report applies to both Canada and US  
-  
UL listed, certified by UL for use in Canada  
30 V DC  
IEC: IP68, IP69K; UL/CSA Type: 1, 2, 3, 3R, 3S, 4, 4x, 6, 6P, 12, 12K, 13


Engineering

Circuit diagrams


E58...HA




E58...HAP




E58...DDP, E58...DLP



E58...HD  
E58...HL




E58...HDP  
E58...HLP




Excess gain chart

- One-way light barrier**  
 ① One-way light barrier  
**Reflex**  
 ② 84-mm-Reflector  
**Polarized reflex**  
 ③ 84-mm-Reflector

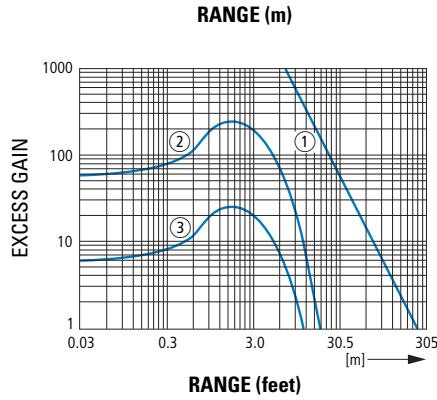


- Perfect Prox®**  
 ① 18 mm Diameter, 50-mm-Designs  
 ② 18 mm Diameter, 100-mm-Designs  
 ③ 30 mm Diameter, 150-mm-Designs  
 ④ 30 mm Diameter, 280-mm-Design

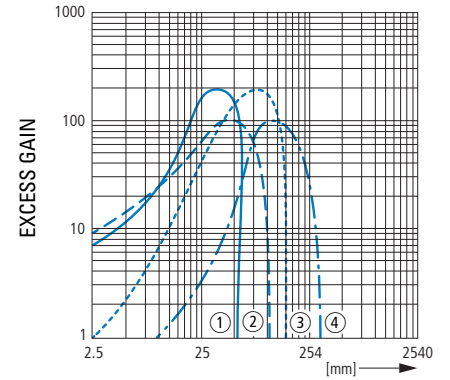


Dimensions

E58-Serie

E58-18...

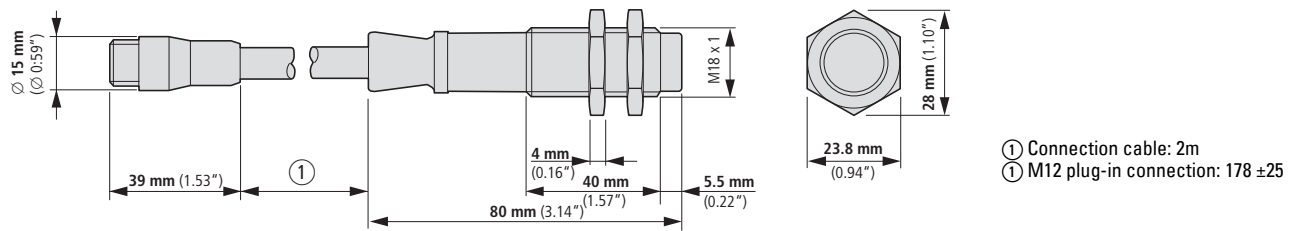

E58-30...

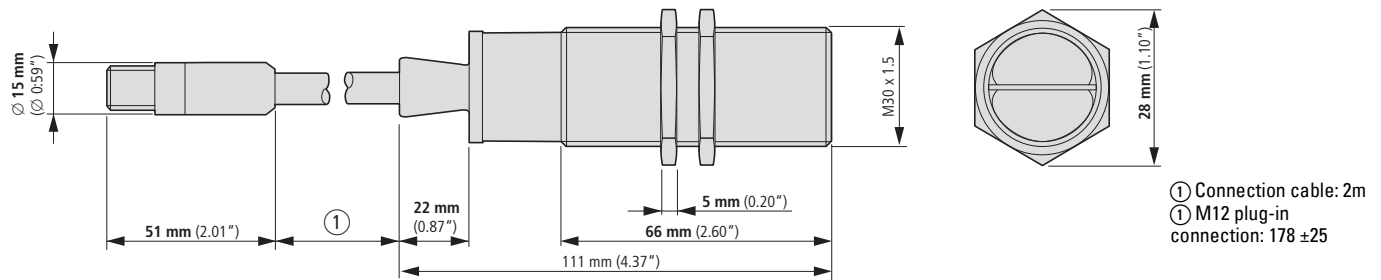

Technical data

|  |                | 2-wire                          |                 | 4-wire               |                 |
|--|----------------|---------------------------------|-----------------|----------------------|-----------------|
|  |                | E58-18...                       | E58-30...       | E58-18...            | E58-30...DP150  |
| <b>General</b>                                     |                |                                 |                 |                      |                 |
| Standards  |                | IEC/EN 60947-5-2                |                 |                      |                 |
| Ambient temperature                                | °C             | - 40 - + 70                     | - 25 - + 55     | - 40 - + 55          | - 40 - + 55     |
| Protection type                                    |                | IP69K                           | IP69K           | IP69K                | IP69K           |
| Mechanical shock resistance                        | g              | 100<br>Shock duration 3 ms      |                 |                      |                 |
| <b>Characteristics</b>                             |                |                                 |                 |                      |                 |
| Rated operational voltage                          | U <sub>e</sub> | 18 - 50 V DC                    | 18 - 50 V DC    | 10 - 30 V DC         | 10 - 30 V DC    |
| Operating current in the switched state at 24 V DC | I <sub>b</sub> | 1.7 mA                          | 1.7             | -                    | -               |
| Maximum load current                               | I <sub>e</sub> | 100                             | 300             | PNP: 100<br>NPN: 250 | 100             |
| Response time                                      | ms             | 35                              | 35              | 1                    | 1.6             |
| Switching state display                            | LED            | Red                             | Red             | Red                  | Red             |
| Protective functions                               |                | Short-circuit protective device |                 |                      |                 |
| <b>Connection</b>                                  |                |                                 |                 |                      |                 |
| Design (outer dimensions)                          | mm             | M18 x 1                         | M30 x 1.5       | M18 x 1              | M30 x 1.5       |
| Material   |                | Stainless steel                 | Stainless steel | Stainless steel      | Stainless steel |

Notes

Further technical data can be found in the Online Catalog at <http://de.ecat.moeller.net>

## Description



- ① 18 mm thread
- ② Voltage LED (green)
- ③ Output LED (red)
- ④ Targetlock™ LED (orange)
- ⑤ Gain adjustment

### Short Description

Eaton's SM series photoelectric sensors offer a high performance and simple use in a compact, cost-effective design. Regardless how good a sensor's performance just a slight maladjustment or incorrectly positioned target will sooner or later impact reliability. TargetLock™ not only simplifies sensor setup but visually confirms your sensor is positioned to operate with the highest possible reliability. In addition TargetLock™ outputs diagnostic information during operation, which provide an early warning about potential problems to help prevent costly downtimes. The SM Series includes many other features that simplify use. Visible sensing beams on all models show you exactly where the sensors are pointing. The durable enclosure features multiple fixing possibilities to easily fit on your equipment in the tightest of spaces. Full protection from overvoltage, reverse polarity and short circuits reduces the chance of damage. Bright 360° LED indicators clearly show sensor status.










### Product Features

- Bright indicators for current, output, and TargetLock™.
- TargetLock™ simplifies setup and ensures a high operational reliability.
- Perfect Prox® models detect targets with different colors at the same range while ignoring background objects.
- DC-models feature PNP and NPN outputs.
- Visible sensing beam on all models lets you see where the beam is aimed for quick flush mounting and alignment.
- Compact design for space-saving flush mounting.
- Range of mounting options, including standard 18 mm thread.
- Short-circuit, overload and protection against polarity reversal.
- Full family includes thru-beam, polarized reflex, diffuse reflective and Perfect Prox® background rejection.

### Approvals



Ordering

| Rated operational voltage<br>$U_e$  | Description     | Rated switching distance<br>$S_n$<br>mm        | Switching type                   | Switching principle        | For connection of:               | Part no.<br>Article no.          | Price<br>see price list          | Std. pack  |
|---|-----------------|--|----------------------------------|----------------------------|----------------------------------|----------------------------------|----------------------------------|--|
| <b>E65-SM</b>   |                 |  |                                  |                            |                                  |                                  |                                  |  |
| 4-wire<br>Insulated material  |                 |  |                                  |                            |                                  |                                  |                                  |  |
| Reflected-light beam  |                 |  |                                  |                            |                                  |                                  |                                  |  |
|    | 10 - 30 V DC    | with background suppression (Perfect Prox)     | 50                               | NPN<br>PNP                 | Dark switching                   | 2 m connection cable             | <b>E65-SMPP050-HD</b><br>135702  | 1 off<br>      |
|   |                 |  |                                  |                            |                                  | Plug-in connection M12 x 1       | <b>E65-SMPP050-HDD</b><br>135703 |  |
|   |                 |  | Light switching                  | 2 m connection cable       | <b>E65-SMPP050-HL</b><br>135704  |                                  |                                  |  |
|   |                 |  |                                  | Plug-in connection M12 x 1 | <b>E65-SMPP050-HLD</b><br>135705 |                                  |                                  |  |
|   |                 |  | 100                              | NPN<br>PNP                 | Dark switching                   | 2 m connection cable             | <b>E65-SMPP100-HD</b><br>135710  |  |
|   |                 |  |                                  |                            |                                  | Plug-in connection M12 x 1       | <b>E65-SMPP100-HDD</b><br>135711 |  |
|   | Light switching | 2 m connection cable                           | <b>E65-SMPP100-HL</b><br>135712  |                            |                                  |                                  |                                  |  |
|   |                 | Plug-in connection M12 x 1                     | <b>E65-SMPP100-HLD</b><br>135713 |                            |                                  |                                  |                                  |  |
|   | -               | 200  | NPN<br>PNP                       | Dark switching             | 2 m connection cable             | <b>E65-SMSD200-HD</b><br>135726  |                                  |  |
|   |                 |  |                                  |                            | Plug-in connection M12 x 1       | <b>E65-SMSD200-HDD</b><br>135727 |                                  |  |
|   |                 |  |                                  | Light switching            | 2 m connection cable             | <b>E65-SMSD200-HL</b><br>135728  |                                  |  |
|   |                 |  |                                  |                            | Plug-in connection M12 x 1       | <b>E65-SMSD200-HLD</b><br>135729 |                                  |  |
| Reflex photoelectric sensor   |                 |  |                                  |                            |                                  |                                  |                                  |  |
|  | 10 - 30 V DC    | Polarized light for combination with reflector | 3000                             | NPN<br>PNP                 | Dark switching                   | 2 m connection cable             | <b>E65-SMPR3-HD</b><br>135718    | 1 off<br>  |
|   |                 |  |                                  |                            |                                  | Plug-in connection M12 x 1       | <b>E65-SMPR3-HDD</b><br>135719   |  |
|   |                 |  |                                  |                            | Light switching                  | 2 m connection cable             | <b>E65-SMPR3-HL</b><br>135720    |  |
|   |                 |  |                                  |                            |                                  | Plug-in connection M12 x 1       | <b>E65-SMPR3-HLD</b><br>135721   |  |
| Thru-beam photoelectric sensor  |                 |  |                                  |                            |                                  |                                  |                                  |  |
|  | 10 - 30 V DC    | Detector (for combination with source)         | 15000                            | NPN<br>PNP                 | Dark switching                   | 2 m connection cable             | <b>E65-SMTD15-HD</b><br>135730   | 1 off<br>  |
|   |                 |  |                                  |                            |                                  | Plug-in connection M12 x 1       | <b>E65-SMTD15-HDD</b><br>135731  |  |
|   |                 |  |                                  |                            | Light switching                  | 2 m connection cable             | <b>E65-SMTD15-HL</b><br>135732   |  |
|   |                 |  |                                  |                            |                                  | Plug-in connection M12 x 1       | <b>E65-SMTD15-HLD</b><br>135733  |  |
|   |                 | Source (for combination with detector)         | 15000                            | NPN<br>PNP                 | -                                | 2 m connection cable             | <b>E65-SMTS15-HA</b><br>135734   |  |
|   |                 |  |                                  |                            |                                  | Plug-in connection M12 x 1       | <b>E65-SMTS15-HAD</b><br>135735  |  |
|   |                 |  |                                  |                            | -                                |                                  |                                  |  |
|   |                 |  |                                  |                            | -                                |                                  |                                  |  |

Information relevant for export to North America



Product Standards  
UL File No.  
UL CCN  
CSA File No.  
CSA Class No.  
NA Certification  
Max. Voltage Rating  
Degree of Protection

UL 508; CSA-C22.2 No. 14; IEC60947-5-2; CE marking  
E166051  
NRKH, NRKH7  
UL report applies to both Canada and US  
-  
UL listed, certified by UL for use in Canada  
132 V AC, 30 V DC  
IEC: IP68, IP69K; UL/CSA Type: 1, 3, 4, 4x, 6, 6P, 12, 13

WWW.TM2A.PT info@tm2a.pt

WWW.TM2A.PT info@tm2a.pt




## Technical data

|  |                |                |  | E65...50-H...  | E65...15-H...      | E65...-HA...       |
|--|----------------|----------------|--|--|--------------------|--------------------|
| <b>General</b>                                     |                |                |  |  |                    |                    |
| Standards  |                |                |  | IEC/EN 60947-5-2   |                    |                    |
| Ambient temperature                                |                |                |  | -  | -                  | -                  |
| Operation  | θ              | °C             |  | -25 - +55  | -25 - +55          | -25 - +55          |
| Storage  | θ              | °C             |  | -25 - +70  | -25 - +70          | -25 - +70          |
| Protection type                                    |                |                |  | IP68, IP69K  | IP68, IP69K        | IP68, IP69K        |
| Mechanical shock resistance                        |                | g              |  | 50<br>Shock duration 10 ms   |                    |                    |
| <b>Characteristics</b>                             |                |                |  |  |                    |                    |
| Rated operational voltage                          |                | U <sub>e</sub> |  | 10 - 30 V DC   | 10 - 30 V DC       | 10 - 30 V DC       |
| Operating current in the switched state at 24 V DC | I <sub>b</sub> | mA             |  | 20   | 20                 | 40                 |
| Maximum load current                               | I <sub>e</sub> | mA             |  | 100  | 100                | 100                |
| Switching Frequency                                |                | Hz             |  | -  | -                  | -                  |
| Switching state display                            |                | LED            |  | Red  | Red                | Red                |
| Operating voltage display                          |                | LED            |  | Green  | Green              | Green              |
| Boundary gain                                      |                |                |  | Yellow   | Yellow             | Yellow             |
| Protective functions                               |                |                |  | Short-circuit protective device<br>Protection against polarity reversal<br>Protection against wire breakage                      |                    |                    |
| Connection   |                |                |  | 4-wire   | 4-wire             | 4-wire             |
| Design (outer dimensions)                          |                | mm             |  | 33 x 41 x 37   | 33 x 41 x 37       | 33 x 41 x 37       |
| Material   |                |                |  | Insulated material   | Insulated material | Insulated material |
| <b>Notes</b>                                       |                |                |  | Further technical data can be found in the Online Catalog at <a href="http://de.ecat.moeller.net">http://de.ecat.moeller.net</a> |                    |                    |


Engineering

Circuit diagrams


E65...HA




E65...HAD






E65...HD  
E65...HL



E65...HDD  
E65...HLD



Excess gain chart

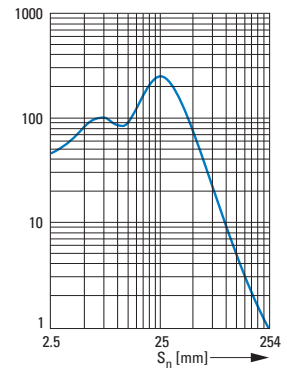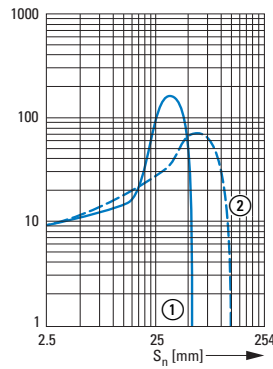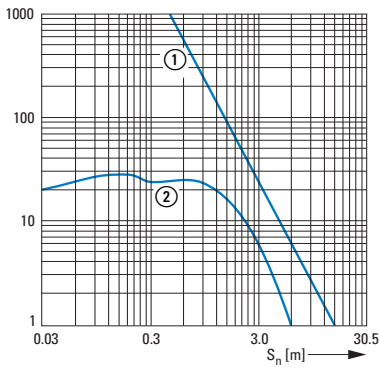

- ① One-way light barrier
- ② Retroreflective sensing sensor with polarization filter


- ① 50 mm Perfect Prox®
- ② 100 mm Perfect Prox®

- Light switch
- 90% reflection test card



Dimensions

E65-SM-Series

- E65...-HD
- E65...-HL
- E65...-HA

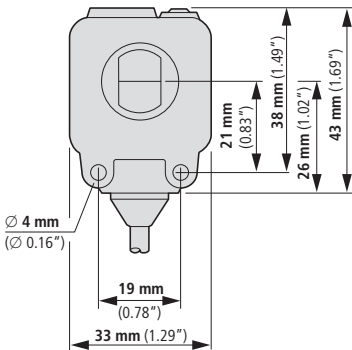

- E65...-HDD
- E65...-HLD
- E65...-HAD



info@tm2a.pt

WWW.TM2A.PT

info@tm2a.pt

WWW.TM2A.PT

## Description



### Short Description

The E67 Long Range Perfect Prox series includes long-range sensors with background suppression, making it ideal for demanding sensing applications. E67 Long Range Perfect Prox sensors will reliably detect target objects within their sensing range regardless of variations in color, reflectance, contrast, or surface shape. Accordingly, they will simply ignore objects that are just outside their target range.


### Product Features

- Perfect Prox technology provides exceptional background rejection and application problem solving
- Sensing ranges of 60 to 240 cm are available.
- No user adjustments required.
- Dual indicators communicate both output and power status from an easy-to-see location at the top of the sensor enclosure
- The DC sensors come with NPN and PNP outputs.
- Two mounting options for maximum flexibility
- Fully sealed enclosure.

### Approvals




Ordering
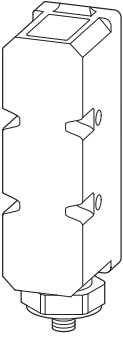
| Rated switching distance<br>$S_n$<br>mm  | Switching type | Type of light | Light switching                  |                         | Dark switching                   |                         | Std. pack |
|--|----------------|---------------|----------------------------------|-------------------------|----------------------------------|-------------------------|-----------|
|  |                |               | Part no.<br>Article no.          | Price<br>see price list | Part no.<br>Article no.          | Price<br>see price list |           |
| <b>E67 Long Range Series</b><br>with background suppression (Perfect Prox)<br>4-wire<br>Reflected-light beam<br>Rated operational voltage $U_e$ 18 – 30 V DC<br>Plug-in connection M12 x 1 |                |               |                                  |                         |                                  |                         |           |
|   | NPN<br>PNP     | Infra-red     | <b>E67-LRDP060-HLD</b><br>100540 |                         | <b>E67-LRDP060-HDD</b><br>100539 | 1 off                   |           |
|  |                |               | <b>E67-LRDP070-HLD</b><br>100542 |                         | <b>E67-LRDP070-HDD</b><br>100541 |                         |           |
|  |                |               | <b>E67-LRDP080-HLD</b><br>100544 |                         | <b>E67-LRDP080-HDD</b><br>100543 |                         |           |
|  |                |               | <b>E67-LRDP090-HLD</b><br>100546 |                         | <b>E67-LRDP090-HDD</b><br>100545 |                         |           |
|  |                |               | <b>E67-LRDP100-HLD</b><br>100548 |                         | <b>E67-LRDP100-HDD</b><br>100547 |                         |           |
|  |                |               | <b>E67-LRDP110-HLD</b><br>100550 |                         | <b>E67-LRDP110-HDD</b><br>100549 |                         |           |
|  |                |               | <b>E67-LRDP120-HLD</b><br>100552 |                         | <b>E67-LRDP120-HDD</b><br>100551 |                         |           |
|  |                |               | <b>E67-LRDP130-HLD</b><br>100554 |                         | <b>E67-LRDP130-HDD</b><br>100553 |                         |           |
|  |                |               | <b>E67-LRDP140-HLD</b><br>100556 |                         | <b>E67-LRDP140-HDD</b><br>100555 |                         |           |
|  |                |               | <b>E67-LRDP150-HLD</b><br>100558 |                         | <b>E67-LRDP150-HDD</b><br>100557 |                         |           |
|  |                |               | <b>E67-LRDP160-HLD</b><br>100560 |                         | <b>E67-LRDP160-HDD</b><br>100559 |                         |           |
|  |                |               | <b>E67-LRDP170-HLD</b><br>100562 |                         | <b>E67-LRDP170-HDD</b><br>100561 |                         |           |
|  |                |               | <b>E67-LRDP180-HLD</b><br>100564 |                         | <b>E67-LRDP180-HDD</b><br>100563 |                         |           |
|  |                |               | <b>E67-LRDP190-HLD</b><br>100566 |                         | <b>E67-LRDP190-HDD</b><br>100565 |                         |           |
|  |                |               | <b>E67-LRDP200-HLD</b><br>100568 |                         | <b>E67-LRDP200-HDD</b><br>100567 |                         |           |
|  |                |               | <b>E67-LRDP210-HLD</b><br>100570 |                         | <b>E67-LRDP210-HDD</b><br>100569 |                         |           |
|  |                |               | <b>E67-LRDP220-HLD</b><br>100572 |                         | <b>E67-LRDP220-HDD</b><br>100571 |                         |           |
|  |                |               | <b>E67-LRDP230-HLD</b><br>100574 |                         | <b>E67-LRDP230-HDD</b><br>100573 |                         |           |
|  |                |               | <b>E67-LRDP240-HLD</b><br>100576 |                         | <b>E67-LRDP240-HDD</b><br>100575 |                         |           |

WWW.TM2A.PT info@tm2a.pt


WWW.TM2A.PT info@tm2a.pt

Dimensions

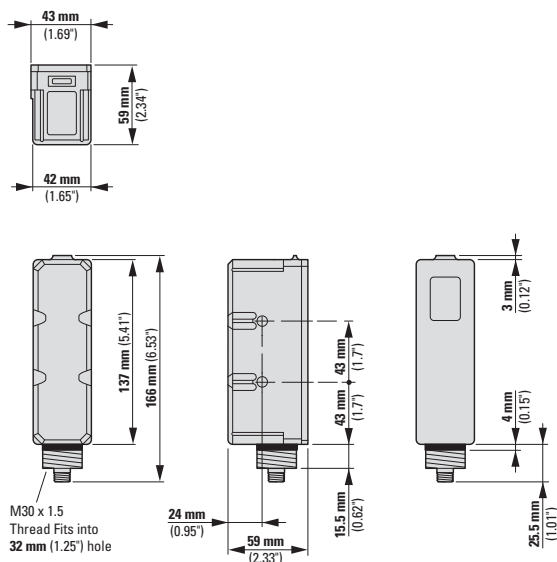

Engineering

Excess gain chart

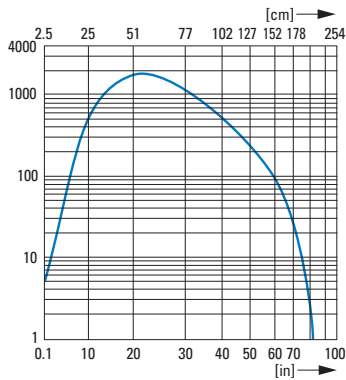


① This fixed sensing range is printed on the product label. Other ranges are available from Eaton upon request.

Circuit diagram

Connector Version - Face view male

DC current<sup>1)</sup>  
NPN & PNP

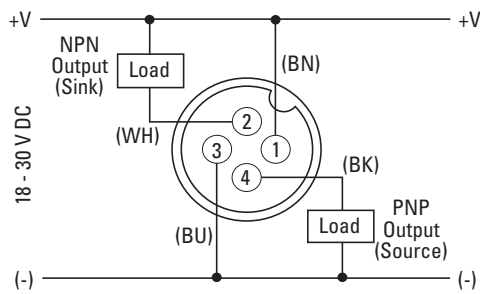

→ DIN IEC 304, DIN IEC 757

|    |       |
|----|-------|
| BK | Black |
| BN | Brown |
| BU | Blue  |
| GN | Green |
| RD | Red   |
| WH | White |

<sup>1)</sup> Connector Versions: The pin numbering and wire colors are typical of several manufacturers, however, variations are possible.  
→ In case of discrepancies, rely on function indicated and pin location rather than pin number or wire color.

Technical data

|                             |   |                | E67                         |
|-----------------------------|---|----------------|-----------------------------|
| <b>General</b>              |   |                |                             |
| Ambient temperature         |   | °C             |                             |
| Operation                   | θ | °C             | -35 - + 55                  |
| Storage                     | θ | °C             | -40 - +70                   |
| Protection type             |   |                | IP67                        |
| Mechanical shock resistance |   | g              | 30<br>Shock duration 6 ms   |
| Vibration                   |   |                | 10 g (10 Hz - 2 kHz)        |
| <b>Characteristics</b>      |   |                |                             |
| Rated operational voltage   |   | U <sub>e</sub> | 18 – 30 V DC                |
| Maximum load current        |   | I <sub>e</sub> | < 100                       |
| Response time               |   | ms             | 15                          |
| Switching state display     |   | LED            | Red                         |
| Operating voltage display   |   | LED            | Green                       |
| Connection                  |   |                | 4-wire                      |
| Design (outer dimensions)   |   | mm             | Rectangular (166 x 59 x 43) |
| For connection of:          |   |                | Plug-in connection M12 x 1  |

WWW.TM2A.PT info@tm2a.pt

WWW.TM2A.PT info@tm2a.pt

## Description



### Short Description

The NanoView™ Series from Eaton is a family of miniature rectangular photoelectric sensors designed for optimum value and sensing performance in a wide range of applications.

These small sensors are available for a wide variety of optical operating modes: retroreflective sensing sensor, diffuse reflective sensor, and thru-beam photoelectric sensor. They can even be used to detect transparent objects, such as plastic bottles, molded parts, containers, and films. NanoView sensors are housed in ABS enclosures rated IP66 or better. Two top-mounted indicator LEDs communicate power and output status.

Each model includes both light operate and dark operate modes. Termination options include a 4pole M8 connector cable or a built-in 6 ft (2m) cable. NanoView is the ultimate solution to sensing challenges that require reduced dimensions and costs.







### Product Features

- Complete range.
- Small size: With a length of less than 38 mm and a depth of 13 mm, NanoView sensors can fit pretty much anywhere.
- Models with focused beam path: A focal length of 100 mm makes them perfect for detecting small target objects. In addition, a visible red LED beam makes them easy to set up.

### Approvals



## Ordering

|   | Description   | Rated operational voltage<br>$U_e$ | Switching principle             | Rated switching distance<br>$S_n$<br>mm | Switching type | For connection of:        | Type of light | Part no.<br>Article no.                   | Price<br>see price list   | Std. pack |
|---|---|------------------------------------|---------------------------------|---|----------------|---------------------------|---------------|---|---|-----------|
| <b>E71-Serie NanoView</b><br>4-wire   |   |                                    |                                 |   |                |                           |               |   |   |           |
|    | Source (for combination with detector)                          | 10 - 30 V DC                       | Light/dark switching adjustable | 1500                                    | 9999999        | Plug-in connection M8 x 1 | Infra-red     | <b>E71-NTBS-M8<sup>1)</sup></b><br>100522 | 1 off   |           |
|   |   |                                    |                                 |   | 9999999        | 2 m connection cable      |               | <b>E71-NTBS-CA<sup>1)</sup></b><br>100521 |   |           |
|   |   |                                    |                                 |   | 9999999        | Plug-in connection M8 x 1 |               | <b>E71-TBS-M8<sup>1)</sup></b><br>100536  |   |           |
|   |   |                                    |                                 |   | 9999999        | 2 m connection cable      |               | <b>E71-TBS-CA<sup>1)</sup></b><br>100535  |   |           |
|   | Detector (for combination with source)                          | 10 - 30 V DC                       | Light/dark switching adjustable | 6000                                    | NPN            | Plug-in connection M8 x 1 | Infra-red     | <b>E71-TBRN-M8<sup>1)</sup></b><br>100532 |   |           |
|   |   |                                    |                                 |   | NPN            | 2 m connection cable      |               | <b>E71-TBRN-CA<sup>1)</sup></b><br>100531 |   |           |
|   |   |                                    |                                 |   | PNP            | Plug-in connection M8 x 1 |               | <b>E71-TBRP-M8<sup>1)</sup></b><br>100534 |   |           |
|   |   |                                    |                                 |   | PNP            | 2 m connection cable      |               | <b>E71-TBRP-CA<sup>1)</sup></b><br>100533 |   |           |
|   | for combination with reflector<br>Detecting transparent objects | 10 - 30 V DC                       | Light/dark switching adjustable | 800                                     | NPN            | Plug-in connection M8 x 1 | Visible red   | <b>E71-CON-M8<sup>2)</sup></b><br>100426  |   |           |
|   |   |                                    |                                 |   | NPN            | 2 m connection cable      |               | <b>E71-CON-CA<sup>2)</sup></b><br>100069  |   |           |
|   |   |                                    |                                 |   | PNP            | Plug-in connection M8 x 1 |               | <b>E71-COP-M8<sup>2)</sup></b><br>100428  |   |           |
|   |   |                                    |                                 |   | PNP            | 2 m connection cable      |               | <b>E71-COP-CA<sup>2)</sup></b><br>100427  |   |           |
|   | for combination with reflector<br>(polarized light)             | 10 - 30 V DC                       | Light/dark switching adjustable | 2500                                    | PNP            | Plug-in connection M8 x 1 | Visible red   | <b>E71-PRP-M8<sup>2)</sup></b><br>100526  |   |           |
|   |   |                                    |                                 |   | PNP            | 2 m connection cable      |               | <b>E71-PRP-CA<sup>2)</sup></b><br>100525  |   |           |
|   |   |                                    |                                 |   | NPN            | Plug-in connection M8 x 1 |               | <b>E71-PRN-M8<sup>2)</sup></b><br>100524  |   |           |
|   |   |                                    |                                 |   | NPN            | 2 m connection cable      |               | <b>E71-PRN-CA<sup>2)</sup></b><br>100523  |   |           |
|  | Beam: focused, forward viewing                                  | 10 - 30 V DC                       | Light/dark switching adjustable | 100                                     | NPN            | Plug-in connection M8 x 1 | Visible red   | <b>E71-FFDN-M8<sup>1)</sup></b><br>100511 |   |           |
|   |   |                                    |                                 |   | NPN            | 2 m connection cable      |               | <b>E71-FFDN-CA<sup>1)</sup></b><br>100429 |   |           |
|   |   |                                    |                                 |   | PNP            | 2 m connection cable      |               | <b>E71-FFDP-CA<sup>1)</sup></b><br>100517 |   |           |
|   |   |                                    |                                 |   | PNP            | Plug-in connection M8 x 1 |               | <b>E71-FFDP-M8<sup>1)</sup></b><br>100518 |   |           |
|  | Beam: straight  | 10 - 30 V DC                       | Light/dark switching adjustable | 350                                     | NPN            | Plug-in connection M8 x 1 | Infra-red     | <b>E71-SDN-M8<sup>2)</sup></b><br>100528  |   |           |
|   |   |                                    |                                 |   | NPN            | 2 m connection cable      |               | <b>E71-SDN-CA<sup>2)</sup></b><br>100527  |   |           |
|   |   |                                    |                                 |   | PNP            | Plug-in connection M8 x 1 |               | <b>E71-SDP-M8<sup>2)</sup></b><br>100530  |   |           |
|   |   |                                    |                                 |   | PNP            | 2 m connection cable      |               | <b>E71-SDP-CA<sup>2)</sup></b><br>100529  |   |           |

## Information relevant for export to North America



- Product Standards  
UL File No.  
UL CCN  
CSA File No.  
NA Certification  
Max. Voltage Rating  
Degree of Protection

UL 508; CSA-C22.2 No. 14; IEC60947-5-2; CE marking  
E166051  
NRKH, NRKH7  
UL report applies to both Canada and US  
UL listed, certified by UL for use in Canada  
30 V DC  
IEC: IP67; UL/CSA Type: -

- Product Standards  
UL File No.  
UL CCN  
CSA File No.  
NA Certification  
Max. Voltage Rating  
Degree of Protection


UL 508; CSA-C22.2 No. 14; IEC60947-5-2; CE marking  
E166051  
NRKH, NRKH7  
UL report applies to both Canada and US  
UL listed, certified by UL for use in Canada  
30 V DC  
IEC: IP66; UL/CSA Type: -



Engineering


Charts

E71-P

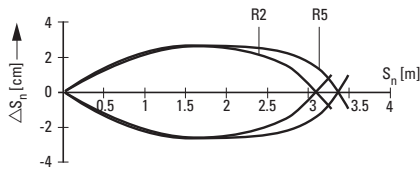


R2 = 48-mm reflector, R5 = 75-mm reflector


E71-F

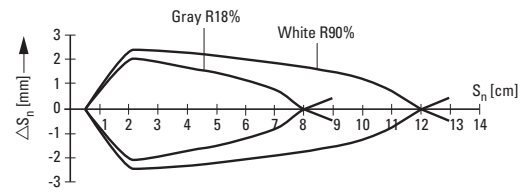

E71-S

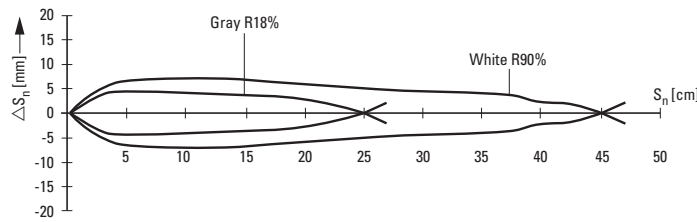


E71-C

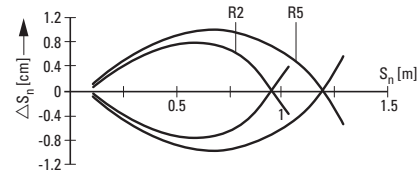


R2 = 48-mm reflector, R5 = 75-mm reflector

Circuit diagrams

NPN


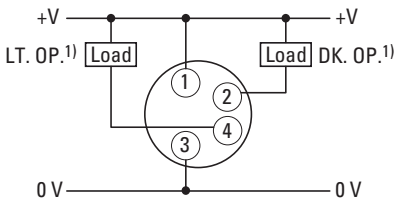


PNP

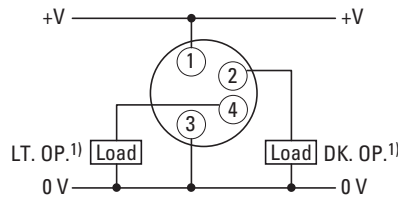

→ DIN IEC 304, DIN IEC 757


|    |       |
|----|-------|
| BK | Black |
| BN | Brown |
| BU | Blue  |
| WH | white |



<sup>1)</sup> LT. OP. = Light operated  
DK. OP. = dark operated

## Dimensions

E71...

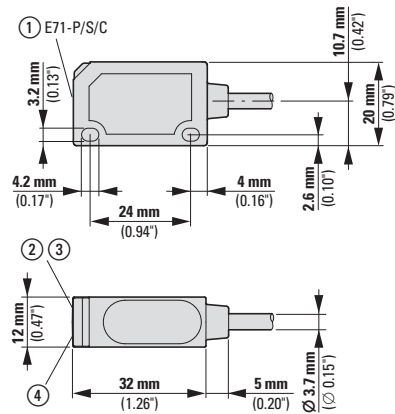

- ① Sensitivity potentiometer
- ② Stability LED
- ③ Power On LED
- ④ Output LED

## Technical data

|                              |          | E71-T... | E71-N...  | E71-P...  | E71-S...  | E71-F...  | E71-C...  |
|------------------------------|----------|----------|---|---|---|---|---|
| <b>General</b>               |          |          |   |   |   |   |   |
| Ambient temperature          | °C       |          |   |   |   |   |   |
| Operation                    | $\theta$ | °C       | -25 - +55   | -25 - +55   | -25 - +55   | -25 - +55   | -25 - +55   |
| Storage                      | $\theta$ | °C       | -25 - +70   | -25 - +70   | -25 - +70   | -25 - +70   | -25 - +70   |
| Protection type              |          |          | IP67  | IP67  | IP66  | IP66  | IP66  |
| Mechanical shock resistance  | g        |          | 30<br>Shock duration<br>11 ms   | 30<br>Shock duration<br>11 ms   | 30<br>Shock duration<br>11 ms   | 30<br>Shock duration<br>11 ms   | 30<br>Shock duration<br>11 ms   |
| Vibration                    |          |          | Amplitude 0.5 mm:<br>10 - 55 Hz.<br>IEC/EN 60068-2-6                    | Amplitude 0.5 mm:<br>10 - 55 Hz.<br>IEC/EN 60068-2-6                    | Amplitude 0.5 mm:<br>10 - 55 Hz.<br>IEC/EN 60068-2-6                    | Amplitude 0.5 mm:<br>10 - 55 Hz.<br>IEC/EN 60068-2-6                    | Amplitude 0.5 mm:<br>10 - 55 Hz.<br>IEC/EN 60068-2-6                    |
| <b>Characteristics</b>       |          |          |   |   |   |   |   |
| Bemessungsschaltabstand      | $S_n$    | mm       | 6000  | 1500  | 2500  | 350   | 100   |
| Rated operational voltage    |          | $U_e$    | 10 - 30 V DC  | 10 - 30 V DC  | 10 - 30 V DC  | 10 - 30 V DC  | 10 - 30 V DC  |
| Maximum load current         |          | $I_e$    | mA  | < 100   | < 100   | < 100   | < 100   |
| Switching Frequency          |          |          | Hz  | 500   | 500   | 500   | 500   |
| Response time                |          |          | ms  | 1   | 1   | 1   | 1   |
| Switching state display      |          |          | LED   | Yellow  | Yellow  | Yellow  | Yellow  |
| Operating voltage display    |          |          | LED   | Green   | Green   | Green   | Green   |
| Protective functions         |          |          | Short-circuit protective device<br>Protection against polarity reversal | Short-circuit protective device<br>Protection against polarity reversal | Short-circuit protective device<br>Protection against polarity reversal | Short-circuit protective device<br>Protection against polarity reversal | Short-circuit protective device<br>Protection against polarity reversal |
| Connection                   |          |          | 4-wire  | 4-wire  | 4-wire  | 4-wire  | 4-wire  |
| Bauform (äußere Abmessungen) |          | mm       | Rectangular<br>(20 x 12 x 32)   | Rectangular<br>(20 x 12 x 32)   | Rectangular<br>(20 x 12 x 32)   | Rectangular<br>(20 x 12 x 32)   | Rectangular<br>(20 x 12 x 32)   |
| For connection of:           |          |          |   |   |   |   |   |
| ...CA                        |          |          | 2 m connection cable  | 2 m connection cable  | 2 m connection cable  | 2 m connection cable  | 2 m connection cable  |
| ...M8...                     |          |          | Plug-in connection M8 x 1   | Plug-in connection M8 x 1   | Plug-in connection M8 x 1   | Plug-in connection M8 x 1   | Plug-in connection M8 x 1   |
| Material                     |          |          | Insulated material  | Insulated material  | Insulated material  | Insulated material  | Insulated material  |

## Description



### Short Description

The IntelliView™ Series from Eaton is a family of compact, high performance specialty photoelectric sensors designed to solve a wide array of sensing challenges.

IntelliView encompasses a variety of new sensing technologies: color, contrast and luminescence sensing; field-adjustable foreground and background suppression sensing; short-range distance sensing with analog outputs; and long-range, high-precision laser distance sensing with analog outputs.

To fit into your application, IntelliView sensors are available in industry-standard M18 flat-tubular and compact rectangular enclosure sizes. For ease of installation and replacement, all models are available with micro-connectors.

### Product Features

- **New Sensing Technologies**—Eaton has developed high-accuracy sensing solutions designed to detect color, contrast, luminescence, and distance.
- **Small Size, Big Solutions**—IntelliView sensors come in either compact rectangular or flat-tubular enclosure sizes, both rugged sealed enclosures
- **Simple "learning mode" installation:** Most models feature a learning mode for quick and simple installation and setup.
- **Adjustable Background Suppression**—For the first time, Eaton offers a fully field-adjustable background suppression photoelectric sensor capable of detecting targets as far as 3.9 ft (1.9m) away.
- **LED Indicators and Pushbuttons**—Multiple LEDs communicate output and power status while built-in pushbuttons and adjustment potentiometers simplify the teaching of sensor settings.

### Approvals



### Adjustable Foreground/ Background Suppression Models



- Ignores nuisance foreground or background objects.
- Field-adjustable sensing ranges.
- Compact 50x50 mm rectangular enclosure size.
- M12 micro-connector termination with 90- and 180-degree rotation options.
- Sensing ranges up to 47.2 in (120 cm).

#### Foreground/Background Sensing Basic Information

Foreground/background suppression sensors make it possible to set exact minimum and maximum detection distances. In other words, they can be used to ensure that targets will only be detected if they are exactly within the specified range. This prevents false positives caused by objects that are too close (foreground) or too far (background). This type of sensor is ideal for suppressing the detection of box edges and bottoms, sending an output only upon the presence of goods actually contained in the box.

### Distance Sensing Models with Analog Outputs



Long-Range, High-Precision Laser  
Distance Measurement Sensor



Short-Range Distance Sensor

- When within the effective range of the sensor, outputs a 0–10V signal proportional to the target's distance from the sensor face
- Class II laser emitter detects objects from 0.3 to 4m (1 to 13.1 ft) away.
- Two additional PNP outputs can be programmed to switch at predetermined ranges.
- Simple three-step learning mode for programming range limits.
- Unmatched accuracy and resolution at long sensing distances.
- Visible red LED emitter detects objects from 5 to 10 cm (1.9 to 3.9 in).
- Two indicator LEDs communicate sensor status: a yellow LED with light intensity proportional to the target's distance within the sensor's range, and a red LED that activates when the target is beyond maximum sensing range.
- Flat tubular enclosure can be mounted using the body threads or flat against a surface

#### Distance Sensing Explained

Distance sensors output a 0–10V analog signal in proportion to the measurement of the distance between the sensor and target. Optical triangulation, a technology similar to that used in Eaton's Perfect Prox or diffuse sensors, is used for short- to mid-range distance sensing applications that do not require a high degree of accuracy. For distance sensing applications that involve longer ranges, time-of-flight technology is used instead. "Time-of-flight" is a method that measures the time it takes for the emitted beam to bounce off the target and return to the sensor. Time-of-flight is highly accurate, with precise resolution over long sensing distances.

## Color Sensors



- Can be programmed to recognize three different colors independently.
- Capable of sensing targets 5–45 mm away from the sensor face.
- Rectangular plastic enclosure features a four-digit display, two programming buttons and output status LEDs.
- Optional serial connection (RS485) allows for remote communications.
- Standard 8pole M12 micro connector.

**Color Sensing Basic Information**

Color sensors work by using a chromaticity detection algorithm. Chromaticity is determined by two characteristics: hue and saturation. Hue is determined by the reflected light's wavelength, while saturation indicates the pureness percentage (with white representing 0%). Eaton's color sensor goes one step further and provides an optional "chromaticity plus intensity" algorithm. This operating mode provides a higher sensitivity to tone variations and is recommended for detection of different colors on the same type of material. It will also better distinguish between gray tones.

The color of a target is determined by the color components of the reflected source light. The target color is identified by analyzing the red (R), green (G) and blue (B) channels of reflected light.

For example, yellow can be identified by the following reflections:

R=50%, G=50%, B=0%

orange can be identified by

R=75%, G=25%, B=0%

pink by

R=50%, G=0%, B=0%

The RGB combinations are practically unlimited. Applications for color sensors are common in many industries, ranging from quality and process control, to automatic material handling for identification, to orientation and selection of objects according to their color.

## Contrast Sensors



- Ideal for detecting different colored or grayscale contrasts, such as registration marks
- Capable of sensing targets out to 10 mm from the sensor face
- Simple three-step setup routine for quick installation or optional "fine setup routine" for more complicated applications
- Complementary outputs can function in either light operate or dark operate modes.
- Standard M12 4pole micro-connector.

**Contrast Sensing Basic Information**

Contrast sensors (also defined as color mark readers, according to their most popular application) go beyond simple presence/absence detection to distinguish two surfaces according to the contrast produced by their difference in reflectivity.

For example, a dark reference mark (low reflectivity) can be detected by comparing it against the contrast of the lighter surface (high reflectivity). A white LED light source is used for general-purpose contrast detection. This makes it possible to detect the slightest contrast changes even when the reference material has the same composition and color.

Contrast sensors are frequently used in automated packaging applications for registration mark detection to automate the folding, cutting and sorting phases.

## Luminescence Sensor



- Perfect for the detection of any luminescent target, even on reflective materials such as ceramics, metal or mirrored glass.
- Capable of sensing from 8–20 mm from the sensor face.
- Simple three-step setup routine. An advanced setup routine is also available for more complex applications.
- Can function in either light operate or dark operate mode.
- Standard M12 4pole micro-connector.













**Luminescence Sensing Basic Information**

Luminescence is defined as visible light emission from fluorescent or phosphorescent substances.

Luminescence sensors emit ultraviolet light, which is then reflected at a higher wavelength from the target surface. The UV emission from the sensor is modulated and the visible light received is synchronized, resulting in immunity against external interferences such as reflections caused by shiny objects.

Luminescence sensors are used in various industries to detect labels, fluorescent marks or signs, fluorescent glues on paper, to distinguish cutting and sewing guides, and to check fluorescent paints or lubricants.


## Ordering

|   | Conne-<br>ction   | Rated<br>operational<br>voltage | Switching<br>principle                | Rated<br>switching<br>distance<br>$S_n$ | Switch-<br>ing type | Type of<br>light                                 | Part no.<br>Article no.  | Price<br>see<br>price list   | Std.<br>pack   |
|---|---|---------------------------------|---------------------------------------|---|---------------------|--|--|--|--|
|   |   | $U_e$                           |                                       | mm                                      |                     |  |  |  |  |
| <b>E75-Serie IntelliView</b><br>Reflected-light beam<br>Plug-in connection M12 x 1    |   |                                 |                                       |   |                     |  |  |  |  |
| Distance sensor 5 - 10 cm<br>Analog output 0 - 10 V                                   | 4-wire  | 18 - 30 V DC                    | analog (0 - 10 V)                     | 100                                     | Analog              | Infra-<br>red                                    | <b>E75-DST010A010-M12</b><br>166995  |  | 1 off<br>      |
|      |   |                                 |                                       |   |                     |  |  |  |  |
| Distance sensor 30 - 400 cm<br>2 programmable PNP outputs<br>1 analog output 0 - 10 V | 5<br>conduct<br>or  | 15 - 30 V DC                    | analog (0 - 10 V)<br>Light switching  | 4000                                    | PNP                 | Visible<br>red                                   | <b>E75-DST400A010-M12</b><br>166996  |  |  |
|      |   |                                 |                                       |   |                     |  |  |  |  |
| Background suppression (Perfect Prox)   | 4-wire  | 10 - 30 V DC                    | Light/dark<br>switching<br>adjustable | 100<br>250<br>500                       | PNP                 | Visible<br>red<br>Infra-<br>red<br>Infra-<br>red | <b>E75-PPA010P-M12</b><br>166998<br><b>E75-PPA025P-M12</b><br>166999<br><b>E75-PPA050P-M12</b><br>166924 |  |  |
|     |   |                                 |                                       |   |                     |  |  |  |  |
| Background suppression (Perfect Prox)   | 4-wire  | 10 - 30 V DC                    | Light/dark<br>switching<br>adjustable | 1200                                    | PNP                 | Infra-<br>red                                    | <b>E75-PP1MP-M12</b><br>166997   |  |  |
|    |   |                                 |                                       |   |                     |  |  |  |  |
| Fore-/background suppression<br>(Perfect Prox)  | 4-wire  | 10 - 30 V DC                    | Light/dark<br>switching<br>adjustable | 1100                                    | PNP                 | Infra-<br>red                                    | <b>E75-PPA110P-M12</b><br>166925   |  |  |
|    |   |                                 |                                       |   |                     |  |  |  |  |
| <b>E76-Serie IntelliView</b><br>Reflected-light beam<br>Plug-in connection M12 x 1    |   |                                 |                                       |   |                     |  |  |  |  |
| Color sensing   | 3 NO NPN outputs<br>3 NO PNP outputs<br>3 NO NPN outputs<br>RS485-connection<br>possible →<br>Engineering | 8<br>conduct<br>or              | 10 - 30 V DC                          | -                                       | 450                 | NPN<br>PNP<br>NPN                                | Infra-<br>red  | <b>E76-CLRMKN-M12</b><br>166926<br><b>E76-CLRMKP-M12</b><br>166927<br><b>E76-CLRMKRS-M12</b><br>166928 | 1 off<br>  |
|    |   |                                 |                                       |   |                     |  |  |  |  |
| Contrast sensing  |   | 4-wire                          | 10 - 30 V DC                          | Light/dark<br>switching<br>adjustable   | 100<br>100          | NPN<br>PNP                                       | Infra-<br>red  | <b>E76-CNT010N-M12</b><br>166929<br><b>E76-CNT010P-M12</b><br>166892                                   |  |
|    |   |                                 |                                       |   |                     |  |  |  |  |
| Luminescence sensing  |   | 4-wire                          | 10 - 30 V DC                          | Light/dark<br>switching<br>adjustable   | 200                 | PNP  | UV<br>(white<br>LED, 400<br>- 700 nm)  | <b>E76-UV020P-M12</b><br>166830  |  |
|    |   |                                 |                                       |   |                     |  |  |  |  |

Engineering


Detection diagram E75-DST400A010-M12

Analog output

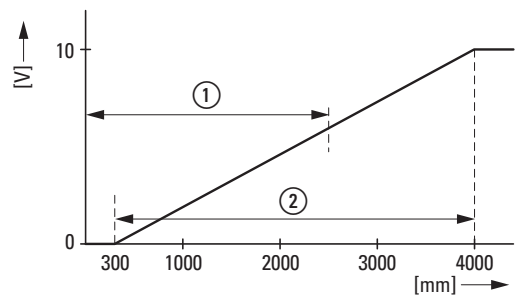


- ① Measuring distance
- ② Measurement range

Digital output

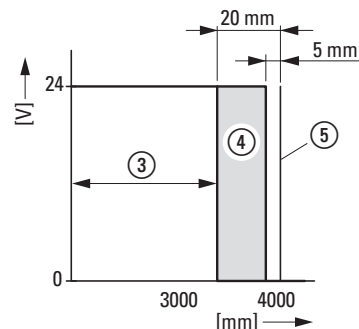

- ③ Switching distance
- ④ Hysteresis
- ⑤ Background


Black / white difference

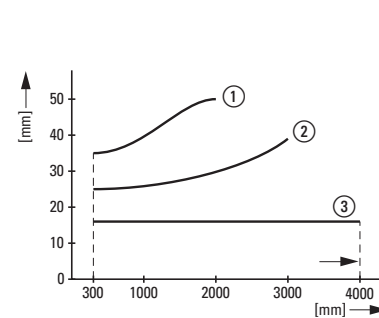


- ① White = 90 %, Black = 4 %
- ② White = 90 %, Grey = 18 %
- ③ White = 90 %

Detection diagram E75-DST010A010-M12


Analog output, proportional (default setting)

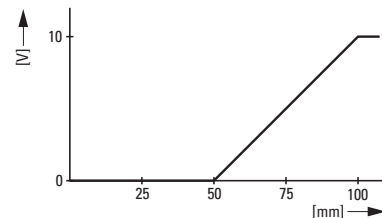

Analog output, proportionally inverted

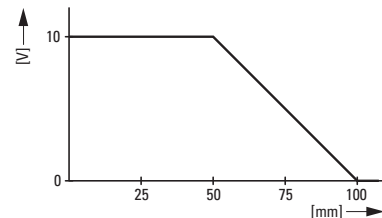


Detection diagram E76-CLR...

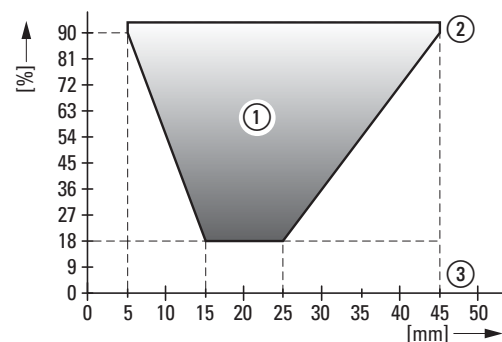

- ① Detectable Colors
- ② White/Light yellow
- ③ Dark blue/Black

Detection diagram E76-CN...

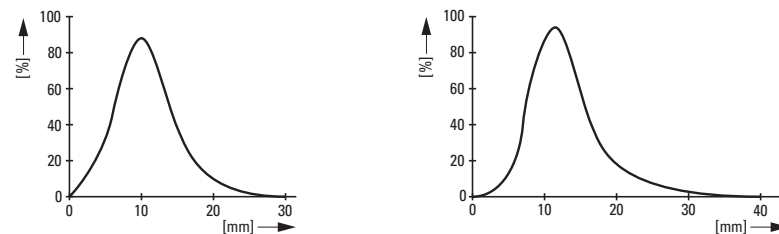


WWW.TM2A.PT info@tm2a.pt

WWW.TM2A.PT info@tm2a.pt



Circuit diagram E75-PPA.../E76PP1...

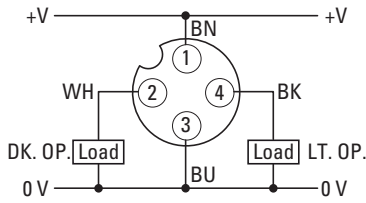


→ DIN IEC 304, DIN IEC 757


|    |        |
|----|--------|
| BN | Brown  |
| BU | Blue   |
| GN | Green  |
| GY | Gray   |
| PK | Pink   |
| RD | Red    |
| WH | white  |
| YE | Yellow |

Circuit diagram E75-DST010A010-M12

"Directly proportional" (DIR) is enabled when the white wire is connected to +V. "Indirectly proportional" is enabled when the white wire is connected to 0V. The white wire must be connected!

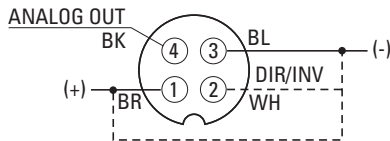


Circuit diagram E75-DST400A010-M12

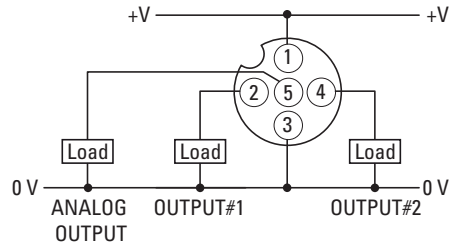


Circuit diagrams E76-CLR...


NPN

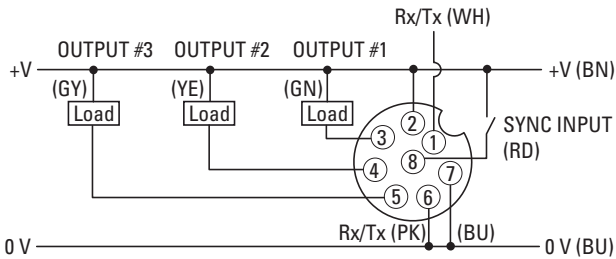

PNP

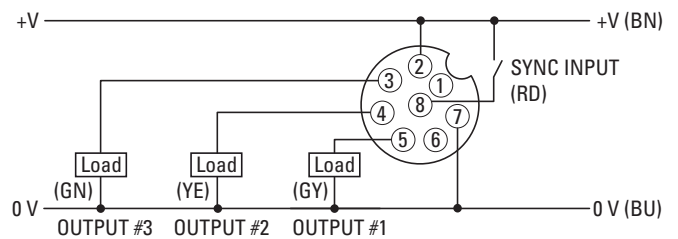


RS485

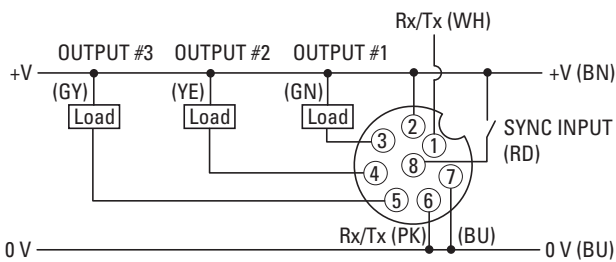


Circuit diagrams E76-CN...


NPN

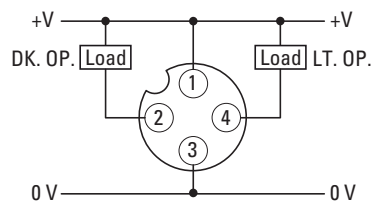

PNP

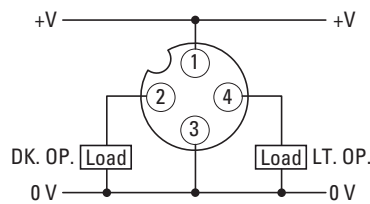

Circuit diagram E76-UV

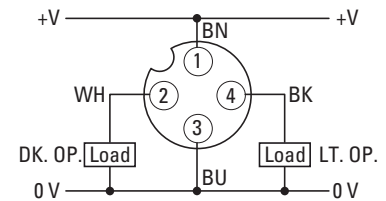


## Technical data

|                             |          |       | E76-CLR...  | E76-CNT...  | E76-UV...   |
|-----------------------------|----------|-------|---|---|---|
| <b>General</b>              |          |       |   |   |   |
| Standards                   |          |       | IEC/EN 60947-5-2                                  | IEC/EN 60947-5-2                                  | IEC/EN 60947-5-2                                  |
| Ambient temperature         |          | °C    |   |   |   |
| Operation                   | $\theta$ | °C    | -10 - +55   | -10 - +55   | -10 - +55   |
| Storage                     | $\theta$ | °C    | -20 - +70   | -20 - +70   | -10 - +70   |
| Protection type             |          |       | IP67  | IP67  | IP67  |
| Mechanical shock resistance |          | g     | 30<br>Shock duration 11 ms                        | 30<br>Shock duration 11 ms                        | 30<br>Shock duration 11 ms                        |
| Vibration                   |          |       | Amplitude 0.5 mm: 10 - 55 Hz.<br>IEC/EN 60068-2-6 | Amplitude 0.5 mm: 10 - 55 Hz.<br>IEC/EN 60068-2-6 | Amplitude 0.5 mm: 10 - 55 Hz.<br>IEC/EN 60068-2-6 |
| <b>Characteristics</b>      |          |       |   |   |   |
| Rated switching distance    | $S_n$    | mm    | 450   | 100   | 200   |
| Rated operational voltage   |          | $U_e$ | 10 - 30 V DC                                      | 10 - 30 V DC                                      | 10 - 30 V DC                                      |
| Maximum load current        | $I_e$    | mA    | -   | < 100   | < 100   |
| Switching Frequency         |          | Hz    | 770   | 2700  | 445   |
| Response time               |          | ms    | 0.65  | 0.19  | 1.1   |
| Switching state display     |          | LED   | Yellow  | Yellow  | Yellow  |
| Operating voltage display   |          | LED   | -   | Green   | Green   |
| Protective functions        |          |       | Short-circuit protective device                   | Short-circuit protective device                   | Short-circuit protective device                   |
| Connection                  |          |       | 8 conductor                                       | 4-wire  | 4-wire  |
| Design (outer dimensions)   |          | mm    | Rectangular (50 x 50 x 25)                        | M18 x 1   | M18 x 1   |
| For connection of:          |          |       | Plug-in connection M12 x 1                        | Plug-in connection M12 x 1                        | Plug-in connection M12 x 1                        |


|                             |            |       | E75-DST0...  | E75-DST4...  | E75-PP1...   | E75-PPA...   |
|-----------------------------|------------|-------|--|--|--|--|
| <b>General</b>              |            |       |  |  |  |  |
| Standards                   |            |       | IEC/EN 60947-5-2                                     | IEC/EN 60947-5-2                                     | IEC/EN 60947-5-2                                     | IEC/EN 60947-5-2                                     |
| Ambient temperature         |            | °C    |  |  |  |  |
| Operation                   | $\theta$   | °C    | -10 - +55  | 0 - +50  | -25 - +55  | -25 - +55  |
| Storage                     | $\theta$   | °C    | -20 - +70  | -20 - +70  | -25 - +70  | -25 - +70  |
| Protection type             |            |       | IP67   | IP67   | IP67   | IP65   |
| Mechanical shock resistance |            | g     | 30<br>Shock duration 11 ms                           | 30<br>Shock duration 11 ms                           | 30<br>Shock duration 11 ms                           | 30<br>Shock duration 11 ms                           |
| Vibration                   |            |       | Amplitude 0.5 mm:<br>10 - 55 Hz.<br>IEC/EN 60068-2-6 | Amplitude 0.5 mm:<br>10 - 55 Hz.<br>IEC/EN 60068-2-6 | Amplitude 0.5 mm:<br>10 - 55 Hz.<br>IEC/EN 60068-2-6 | Amplitude 0.5 mm:<br>10 - 55 Hz.<br>IEC/EN 60068-2-6 |
| <b>Characteristics</b>      |            |       |  |  |  |  |
| Rated switching distance    | $S_n$      | mm    | 100  | 4000   | 1200   |  |
|                             | ... 010... |       | -  | -  | -  | 100  |
|                             | ... 025... |       | -  | -  | -  | 250  |
|                             | ... 050... |       | -  | -  | -  | 500  |
|                             | ... 110... |       | -  | -  | -  | 1100   |
| Rated operational voltage   |            | $U_e$ | 18 - 30 V DC   | 15 - 30 V DC   | 10 - 30 V DC   | 10 - 30 V DC   |
| Maximum load current        |            | $I_e$ | mA   | < 100  | < 100  | < 100  |
| Switching Frequency         |            | Hz    | 68   | 42   | 500  | 500  |
| Response time               |            | ms    | 7.3  | 12   | -  | -  |
| Switching state display     |            | LED   | Yellow   | Yellow   | Yellow   | Red  |
| Operating voltage display   |            | LED   | Green  | Green  | Green  | Green  |
| Protective functions        |            |       | -  | Short-circuit protective device                      | Short-circuit protective device                      | Short-circuit protective device                      |
| Connection                  |            |       | 4-wire   | 5 conductor  | 4-wire   | 4-wire   |
| Design (outer dimensions)   |            | mm    | M18 x 1  | Rectangular (80 x 53 x 31)                           | Rectangular (50 x 50 x 18)                           | Rectangular (50 x 50 x 18)                           |
| For connection of:          |            |       | Plug-in connection<br>M12 x 1                        | Plug-in connection<br>M12 x 1                        | Plug-in connection<br>M12 x 1                        | Plug-in connection<br>M12 x 1                        |

Dimensions

E75...

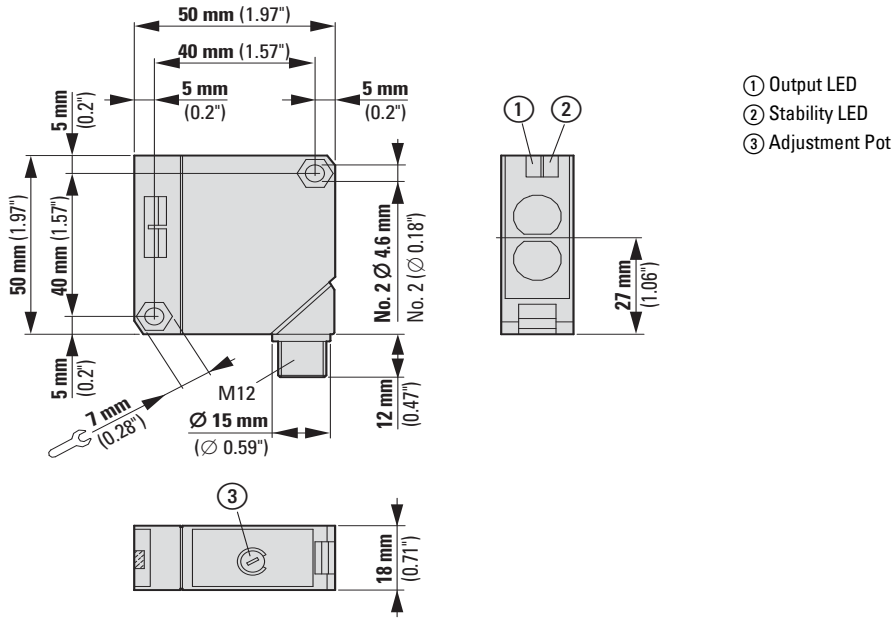

E76...

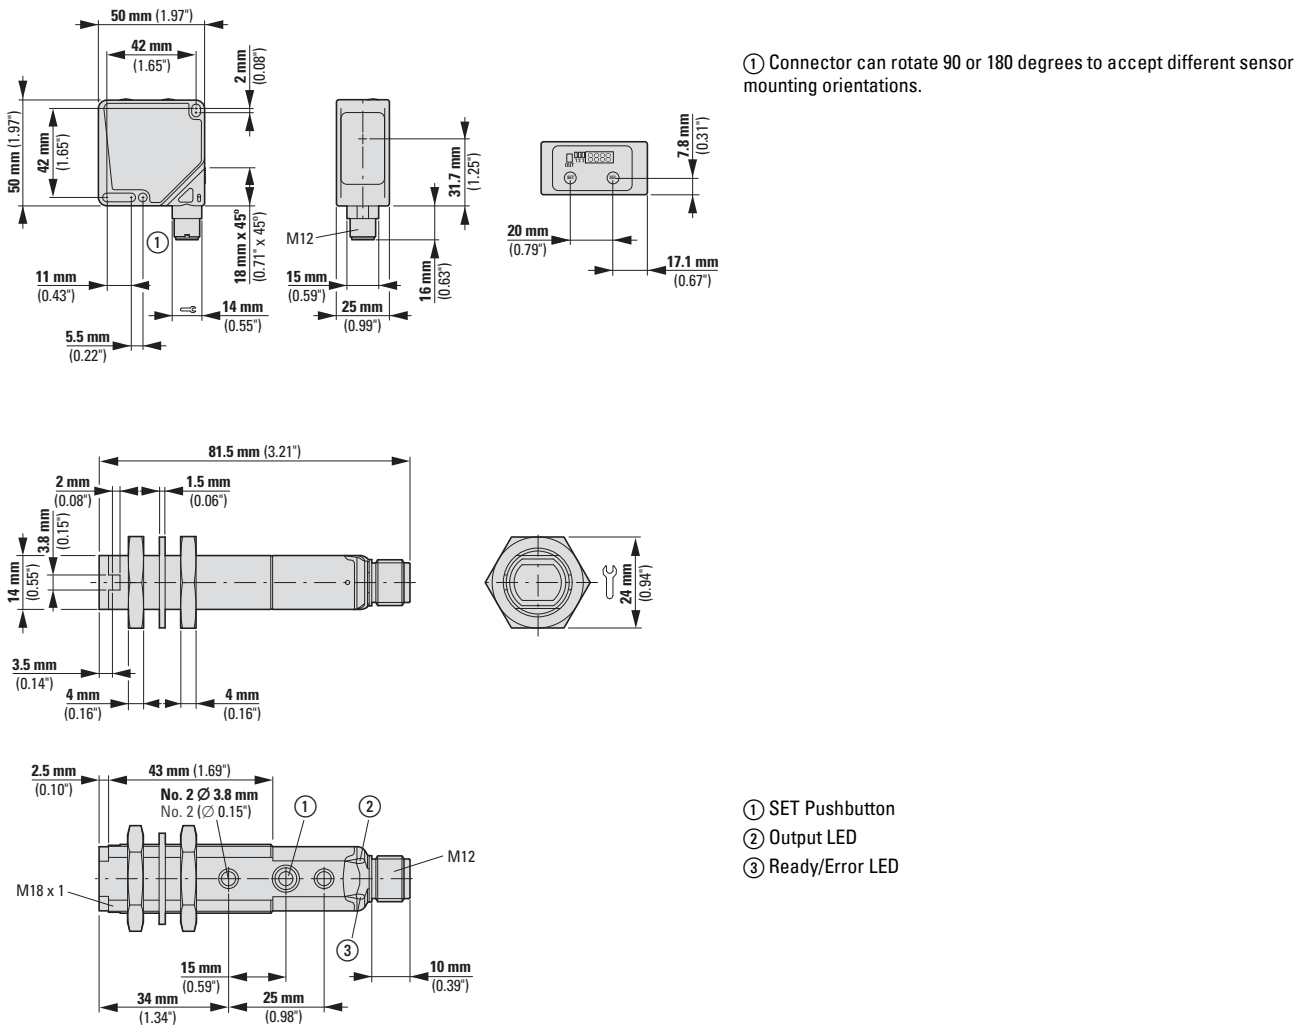

**Description**



- ① Models with cable or plug connectors available.
- ② All models feature an output signal indicator light.



- ① With mounting bracket.

**Short Description**

Capacitive Proximity Sensors from Eaton’s electrical business are self-contained devices designed to detect both metallic and nonmetallic targets. They are ideally suited for liquid level control and for sensing powdered or granulated material. For best operation, they should be used in an environment having relatively constant temperature and humidity.




**Product Features**



- Detect liquids, powders and other materials that are difficult or impossible with other sensor types.
- Corrosion-resistant insulated enclosure.
- Adjustable sensitivity.


**Approvals**



## Ordering

|   | Rated operational voltage<br>$U_e$ | Rated switching distance<br>$S_n$<br>mm | Type of mounting | Switching type             | For connection of:         | Contact configuration<br>N/O = normally open contact<br>N/C = normally closed contact | Material           | Part no.<br>Article no.         | Price<br>see price list | Std. pack |
|---|------------------------------------|---|------------------|----------------------------|----------------------------|---|--------------------|---------------------------------|-------------------------|-----------|
| <b>E53</b>  |                                    |   |                  |                            |                            |   |                    |                                 |                         |           |
| <b>2-wire</b>   |                                    |   |                  |                            |                            |   |                    |                                 |                         |           |
| <b>M18 x 1</b>  |                                    |   |                  |                            |                            |   |                    |                                 |                         |           |
|    | 20 - 250 V AC                      | 8                                       | Flush            | -                          | 2 m connection cable       | 1 N/O   | Insulated material | <b>E53KAL18A2</b><br>134517     |                         | 1 off     |
|   |                                    |   |                  | -                          | Plug-in connection M12 x 1 | 1 N/O   |                    | <b>E53KAL18A2SA</b><br>134760   |                         |           |
|   |                                    |   |                  | -                          | 2 m connection cable       | 1 NC  |                    | <b>E53KBL18A2</b><br>134791     |                         |           |
|   |                                    |   |                  | -                          | Plug-in connection M12 x 1 | 1 NC  |                    | <b>E53KBL18A2SA</b><br>134794   |                         |           |
|   | 15                                 | Non-flush                               | -                | 2 m connection cable       | 1 N/O                      | <b>E53KAL18A2E</b><br>134518  |                    |                                 |                         |           |
|   |                                    |   | -                | Plug-in connection M12 x 1 | 1 N/O                      | <b>E53KAL18A2EA</b><br>134519   |                    |                                 |                         |           |
|   |                                    |   | -                | 2 m connection cable       | 1 NC                       | <b>E53KBL18A2E</b><br>134792  |                    |                                 |                         |           |
|   |                                    |   | -                | Plug-in connection M12 x 1 | 1 NC                       | <b>E53KBL18A2EA</b><br>134793   |                    |                                 |                         |           |
| <b>M30 x 1.5</b>  |                                    |   |                  |                            |                            |   |                    |                                 |                         |           |
|   | 20 - 250 V AC                      | 20                                      | Flush            | -                          | 2 m connection cable       | 1 N/O   | Insulated material | <b>E53KAL30A2</b><br>134769     |                         | 1 off     |
|   |                                    |   |                  | -                          | Plug-in connection M12 x 1 | 1 N/O   |                    | <b>E53KAL30A2SA</b><br>134772   |                         |           |
|   |                                    |   |                  | -                          | 2 m connection cable       | 1 NC  |                    | <b>E53KBL30A2</b><br>134803     |                         |           |
|   |                                    |   |                  | -                          | Plug-in connection M12 x 1 | 1 NC  |                    | <b>E53KBL30A2SA</b><br>134806   |                         |           |
|   | 25                                 | Non-flush                               | -                | 2 m connection cable       | 1 N/O                      | <b>E53KAL30A2E</b><br>134770  |                    |                                 |                         |           |
|   |                                    |   | -                | Plug-in connection M12 x 1 | 1 N/O                      | <b>E53KAL30A2EA</b><br>134771   |                    |                                 |                         |           |
|   |                                    |   | -                | 2 m connection cable       | 1 NC                       | <b>E53KBL30A2E</b><br>134804  |                    |                                 |                         |           |
|   |                                    |   | -                | Plug-in connection M12 x 1 | 1 NC                       | <b>E53KBL30A2EA</b><br>134805   |                    |                                 |                         |           |
| <b>3-wire</b>   |                                    |   |                  |                            |                            |   |                    |                                 |                         |           |
| <b>M18 x 1</b>  |                                    |   |                  |                            |                            |   |                    |                                 |                         |           |
|  | 10 - 30 V DC                       | 8                                       | Flush            | NPN                        | 2 m connection cable       | 1 N/O   | Insulated material | <b>E53KAL18T110</b><br>134761   |                         | 1 off     |
|   |                                    |   |                  |                            | Plug-in connection M12 x 1 | 1 N/O   |                    | <b>E53KAL18T110SD</b><br>134764 |                         |           |
|   |                                    |   |                  |                            | 2 m connection cable       | 1 NC  |                    | <b>E53KBL18T110</b><br>134795   |                         |           |
|   |                                    |   |                  |                            | Plug-in connection M12 x 1 | 1 NC  |                    | <b>E53KBL18T110SD</b><br>134798 |                         |           |
|   |                                    |   |                  | PNP                        | 2 m connection cable       | 1 N/O   |                    | <b>E53KAL18T111</b><br>134765   |                         |           |
|   |                                    |   |                  |                            | Plug-in connection M12 x 1 | 1 N/O   |                    | <b>E53KAL18T111SD</b><br>134768 |                         |           |
|   |                                    |   |                  |                            | 2 m connection cable       | 1 NC  |                    | <b>E53KBL18T111</b><br>134799   |                         |           |
|   |                                    |   |                  |                            | Plug-in connection M12 x 1 | 1 NC  |                    | <b>E53KBL18T111SD</b><br>134802 |                         |           |

|   | Rated operational voltage<br>$U_e$ | Rated switching distance<br>$S_n$<br>mm | Type of mounting                | Switching type  | For connection of:         | Contact configuration<br>N/O = normally open contact<br>N/C = normally closed contact | Material                        | Part no.<br>Article no.         | Price<br>see price list         | Std. pack |                                 |     |                      |                                 |                    |                               |  |       |
|---|------------------------------------|---|---------------------------------|---|----------------------------|---|---------------------------------|---------------------------------|---------------------------------|-----------|---------------------------------|-----|----------------------|---------------------------------|--------------------|-------------------------------|--|-------|
| <b>3-wire</b>   |                                    |   |                                 |   |                            |   |                                 |                                 |                                 |           |                                 |     |                      |                                 |                    |                               |  |       |
| <b>M18 x 1</b>  |                                    |   |                                 |   |                            |   |                                 |                                 |                                 |           |                                 |     |                      |                                 |                    |                               |  |       |
|  | 10 - 30 V DC                       | 15                                      | Non-flush                       | NPN   | 2 m connection cable       | 1 N/O   | Insulated material              | <b>E53KAL18T110E</b><br>134762  |                                 | 1 off     |                                 |     |                      |                                 |                    |                               |  |       |
|   |                                    |   |                                 |   | Plug-in connection M12 x 1 | 1 N/O   |                                 | <b>E53KAL18T110ED</b><br>134763 |                                 |           |                                 |     |                      |                                 |                    |                               |  |       |
|   |                                    |   |                                 |   | 2 m connection cable       | 1 NC  |                                 | <b>E53KBL18T110E</b><br>134796  |                                 |           |                                 |     |                      |                                 |                    |                               |  |       |
|   |                                    |   |                                 |   | Plug-in connection M12 x 1 | 1 NC  |                                 | <b>E53KBL18T110ED</b><br>134797 |                                 |           |                                 |     |                      |                                 |                    |                               |  |       |
|   |                                    |   |                                 |   | PNP                        | 2 m connection cable  |                                 | 1 N/O                           |                                 |           | <b>E53KAL18T111E</b><br>134766  |     |                      |                                 |                    |                               |  |       |
|   |                                    |   |                                 |   |                            | Plug-in connection M12 x 1  |                                 | 1 N/O                           |                                 |           | <b>E53KAL18T111ED</b><br>134767 |     |                      |                                 |                    |                               |  |       |
|   |                                    |   |                                 | 2 m connection cable  |                            | 1 NC  |                                 | <b>E53KBL18T111E</b><br>134800  |                                 |           |                                 |     |                      |                                 |                    |                               |  |       |
|   |                                    |   |                                 | Plug-in connection M12 x 1  |                            | 1 NC  |                                 | <b>E53KBL18T111ED</b><br>134801 |                                 |           |                                 |     |                      |                                 |                    |                               |  |       |
|   |                                    |   |                                 | <b>M30 x 1.5</b>  |                            |   |                                 |                                 |                                 |           |                                 |     |                      |                                 |                    |                               |  |       |
|   |                                    |   |                                 |  |                            | 10 - 30 V DC  |                                 | 20                              |                                 |           | Flush                           | NPN | 2 m connection cable | 1 N/O                           | Insulated material | <b>E53KAL30T110</b><br>134773 |  | 1 off |
|   |                                    |   |                                 |   | Plug-in connection M12 x 1 |   |                                 |                                 |                                 |           |                                 |     | 1 N/O                | <b>E53KAL30T110SD</b><br>134776 |                    |                               |  |       |
|   |                                    |   |                                 |   | 2 m connection cable       |   |                                 |                                 |                                 |           |                                 |     | 1 NC                 | <b>E53KBL30T110</b><br>134807   |                    |                               |  |       |
| Plug-in connection M12 x 1  | 1 NC                               | <b>E53KBL30T110SD</b><br>134810         |                                 |   |                            |   |                                 |                                 |                                 |           |                                 |     |                      |                                 |                    |                               |  |       |
| PNP   | 2 m connection cable               | 1 N/O                                   | <b>E53KAL30T111</b><br>134777   |   |                            |   |                                 |                                 |                                 |           |                                 |     |                      |                                 |                    |                               |  |       |
|   | Plug-in connection M12 x 1         | 1 N/O                                   | <b>E53KAL30T111SD</b><br>134780 |   |                            |   |                                 |                                 |                                 |           |                                 |     |                      |                                 |                    |                               |  |       |
|   | 2 m connection cable               | 1 NC                                    | <b>E53KBL30T111</b><br>134811   |   |                            |   |                                 |                                 |                                 |           |                                 |     |                      |                                 |                    |                               |  |       |
| 10 - 30 V DC  | 25                                 | Non-flush                               | NPN                             |   | 2 m connection cable       |   | 1 N/O                           |                                 | <b>E53KAL30T110E</b><br>134774  |           |                                 |     |                      |                                 |                    |                               |  |       |
|   |                                    |   |                                 |   | Plug-in connection M12 x 1 |   | 1 N/O                           |                                 | <b>E53KAL30T110ED</b><br>134775 |           |                                 |     |                      |                                 |                    |                               |  |       |
|   |                                    |   |                                 |   | 2 m connection cable       | 1 NC  | <b>E53KBL30T110E</b><br>134808  |                                 |                                 |           |                                 |     |                      |                                 |                    |                               |  |       |
|   |                                    |   |                                 |   | Plug-in connection M12 x 1 | 1 NC  | <b>E53KBL30T110ED</b><br>134809 |                                 |                                 |           |                                 |     |                      |                                 |                    |                               |  |       |
|   |                                    |   |                                 |   | PNP                        | 2 m connection cable  | 1 N/O                           | <b>E53KAL30T111E</b><br>134778  |                                 |           |                                 |     |                      |                                 |                    |                               |  |       |
|   |                                    |   |                                 |   |                            | Plug-in connection M12 x 1  | 1 N/O                           | <b>E53KAL30T111ED</b><br>134779 |                                 |           |                                 |     |                      |                                 |                    |                               |  |       |
|   |                                    |   | 2 m connection cable            |   |                            | 1 NC  | <b>E53KBL30T111E</b><br>134812  |                                 |                                 |           |                                 |     |                      |                                 |                    |                               |  |       |
|   |                                    |   | Plug-in connection M12 x 1      |   | 1 NC                       | <b>E53KBL30T111ED</b><br>134813   |                                 |                                 |                                 |           |                                 |     |                      |                                 |                    |                               |  |       |

| Rated operational voltage<br>$U_e$  | Rated switching distance<br>$S_n$<br>mm | Type of mounting | Switching type | For connection of:         | Contact configuration<br>N/O = normally open contact<br>N/C = normally closed contact | Material           | Part no.<br>Article no.         | Price<br>see price list | Std. pack |
|---|---|------------------|----------------|----------------------------|---|--------------------|---------------------------------|-------------------------|-----------|
| <b>2-wire</b>   |   |                  |                |                            |   |                    |                                 |                         |           |
| <b>34 Ø</b>   |   |                  |                |                            |   |                    |                                 |                         |           |
|  | 20 - 250 V AC                           | 35               | Non-flush      | -                          | 2 m connection cable  | Insulated material | <b>E53KAL34A2E</b><br>134781    |                         | 1 off     |
|   |   |                  |                | -                          | Plug-in connection M12 x 1  |                    | <b>E53KAL34A2EA</b><br>134782   |                         |           |
|   |   |                  |                | -                          | 2 m connection cable  |                    | <b>E53KBL34A2E</b><br>134815    |                         |           |
|   |   |                  |                | -                          | Plug-in connection M12 x 1  |                    | <b>E53KBL34A2EA</b><br>134816   |                         |           |
| <b>3-wire</b>   |   |                  |                |                            |   |                    |                                 |                         |           |
| <b>34 Ø</b>   |   |                  |                |                            |   |                    |                                 |                         |           |
| 10 - 30 V DC  | 25                                      | Flush            | NPN            | -                          | 2 m connection cable  | Insulated material | <b>E53KAL34T110</b><br>134783   |                         | 1 off     |
|   |   |                  |                | -                          | Plug-in connection M12 x 1  |                    | <b>E53KAL34T110SD</b><br>134786 |                         |           |
|   |   |                  |                | -                          | 2 m connection cable  |                    | <b>E53KBL34T110</b><br>134817   |                         |           |
|   |   |                  |                | -                          | Plug-in connection M12 x 1  |                    | <b>E53KBL34T110SD</b><br>134820 |                         |           |
|   |   |                  | PNP            | -                          | 2 m connection cable  |                    | <b>E53KAL34T111</b><br>134787   |                         |           |
|   |   |                  |                | -                          | Plug-in connection M12 x 1  |                    | <b>E53KAL34T111SD</b><br>134790 |                         |           |
|   |   |                  |                | -                          | 2 m connection cable  |                    | <b>E53KBL34T111</b><br>134821   |                         |           |
|   |   |                  |                | -                          | Plug-in connection M12 x 1  |                    | <b>E53KBL34T111SD</b><br>134824 |                         |           |
|   | 35                                      | Non-flush        | NPN            | -                          | 2 m connection cable  | Insulated material | <b>E53KAL34T110E</b><br>134784  |                         | 1 off     |
|   |   |                  |                | -                          | Plug-in connection M12 x 1  |                    | <b>E53KAL34T110ED</b><br>134785 |                         |           |
|   |   |                  |                | -                          | 2 m connection cable  |                    | <b>E53KBL34T110E</b><br>134818  |                         |           |
|   |   |                  |                | -                          | Plug-in connection M12 x 1  |                    | <b>E53KBL34T110ED</b><br>134819 |                         |           |
|   |   | PNP              | -              | 2 m connection cable       | <b>E53KAL34T111E</b><br>134788  |                    |                                 |                         |           |
|   |   |                  | -              | Plug-in connection M12 x 1 | <b>E53KAL34T111ED</b><br>134789   |                    |                                 |                         |           |
|   |   |                  | -              | 2 m connection cable       | <b>E53KBL34T111E</b><br>134822  |                    |                                 |                         |           |
|   |   |                  | -              | Plug-in connection M12 x 1 | <b>E53KBL34T111ED</b><br>134823   |                    |                                 |                         |           |



Engineering

Circuit diagram

| Rated operational voltage            | Contact    | 2 m connection cable | Plug-in connection M12 (front view plug) |
|--------------------------------------|------------|----------------------|--|
| <b>2-Wire Sensors</b><br>20–250 V AC | N/O and NC |                      |  |
| <b>3-Wire Sensors</b><br>10–30 V DC  | N/O (NPN)  |                      |  |
|                                      | N/O (PNP)  |                      |  |
|                                      | NC (NPN)   |                      |  |
|                                      | NC (PNP)   |                      |  |

Technical data

|                               |       |       | E53...A...                 | E53...T...         |
|-------------------------------|-------|-------|----------------------------|--------------------|
| <b>General</b>                |       |       |                            |                    |
| Standards                     |       |       | IEC/EN 60947-5-2-EMC       |                    |
| Ambient temperature           |       | °C    | - 25 - + 70                | - 25 - + 70        |
| Protection type               |       |       | IP65                       | IP65               |
| Mechanical shock resistance   |       | g     | 30<br>Shock duration 11 ms |                    |
| <b>Characteristics</b>        |       |       |                            |                    |
| Repetition accuracy of $S_n$  |       | %     | 10                         | 10                 |
| Temperature drift of $S_n$    |       | %     | 10                         | 10                 |
| Switching hysteresis of $S_n$ |       | %     | 20                         | 20                 |
| Rated operational voltage     |       | $U_e$ | 20 - 250 V AC              | 10 - 30 V DC       |
| Residual ripple of $U_e$      |       | %     | 10                         | 10                 |
| Maximum load current          | $I_e$ | mA    | 300                        | 300                |
| Voltage drop at $I_e$         | $U_d$ | V     | 9                          | 2                  |
| Switching Frequency           |       | Hz    | 15                         | 250                |
| Min. load current             | $I_e$ | mA    | 5                          | -                  |
| Switching state display       |       | LED   | Red                        | Red                |
| Connection                    |       |       | 2-wire                     | 3-wire             |
| Material                      |       |       | Insulated material         | Insulated material |

Notes



Further technical data can be found in the Online Catalog at <http://de.ecat.moeller.net>

WWW.TM2A.PT info@tm2a.pt



WWW.TM2A.PT info@tm2a.pt

Dimensions


E53KAL18...  
E53KBL18...

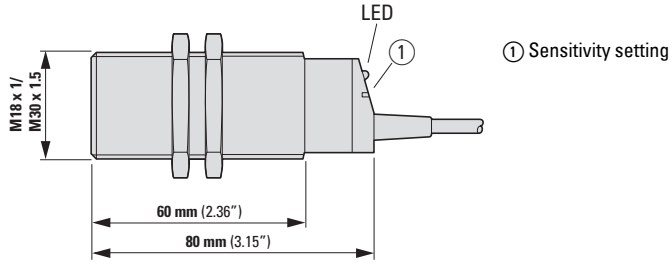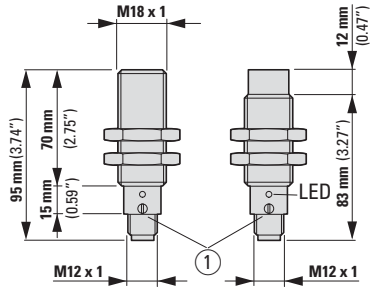


E53KAL30...  
E53KBL30...

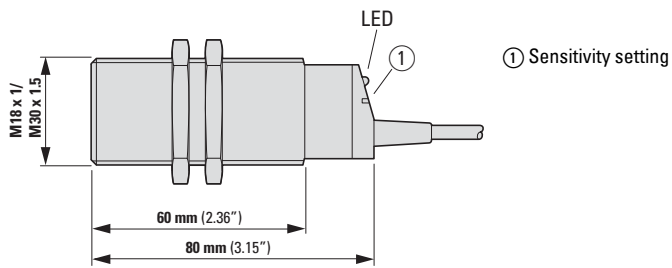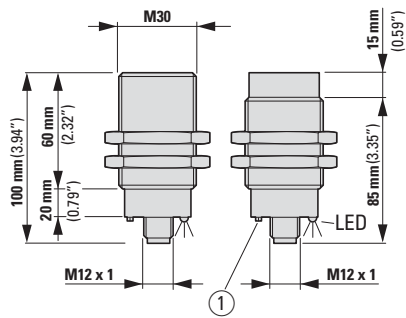


E53KAL34...  
E53KBL34...  
Plug-in connection M12 x 1



Fixing bracket included as standard





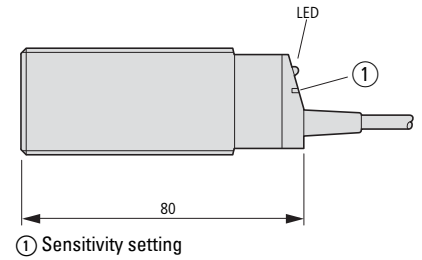





2 m connection cable



WWW.TM2A.PT info@tm2a.pt












WWW.TM2A.PT info@tm2a.pt

Ordering

| Pin assignment   | Description | Switching type | Voltage type | Pole                | Length<br>mm | For use with                                       | Part no.<br>Article no.        | Price<br>see<br>price<br>list | Std.<br>pack |
|--|-------------|----------------|--------------|---------------------|--------------|--|--------------------------------|-------------------------------|--------------|
| <b>Connecting cables</b>   |             |                |              |                     |              |  |                                |                               |              |
| <b>Open wire end</b>   |             |                |              |                     |              |  |                                |                               |              |
| <b>Coupling, straight</b>  |             |                |              |                     |              |  |                                |                               |              |
|   <ul style="list-style-type: none"> <li>1 = Green</li> <li>2 = Red/Black</li> <li>3 = Red/White</li> </ul>    | -           | -              | AC           | 3 pole              | 2000         | AC sensors, 3 pole, M12                            | <b>CSAS3F3CY2202</b><br>136265 |                               | 1 off        |
|  | -           | -              |              |                     | 5000         |  | <b>CSAS3F3CY2205</b><br>136266 |                               |              |
|  | -           | -              |              |                     | 10000        |  | <b>CSAS3F3CY2210</b><br>136267 |                               |              |
|  <ul style="list-style-type: none"> <li>1 = Brown</li> <li>2 = Blue</li> <li>3 = Black</li> <li>4 = White</li> </ul>  | -           | -              | AC           | 4 pole              | 2000         | AC sensors, 4 pole, M12                            | <b>CSAS4A4CY2202</b><br>136268 |                               |              |
|  | -           | -              |              |                     | 5000         |  | <b>CSAS4A4CY2205</b><br>136269 |                               |              |
|  | -           | -              |              |                     | 10000        |  | <b>CSAS4A4CY2210</b><br>136312 |                               |              |
|  <ul style="list-style-type: none"> <li>1 = Brown</li> <li>2 = White</li> <li>3 = Blue</li> <li>4 = Black</li> </ul>  | -           | -              | DC           | 4 pole              | 2000         | DC sensors, 4 pole, 2, 3 or 4-wire connection, M12 | <b>CSDS4A4CY2202</b><br>136292 |                               |              |
|  | -           | -              |              |                     | 5000         | DC sensors, 4 pole, 2, 3 or 4-wire connection, M12 | <b>CSDS4A4CY2205</b><br>136294 |                               |              |
|  | -           | -              |              |                     | 10000        | DC sensors, 4 pole, 2, 3 or 4-wire connection, M12 | <b>CSDS4A4CY2210</b><br>136296 |                               |              |
|  <ul style="list-style-type: none"> <li>1 = Brown</li> <li>2 = White</li> <li>3 = Blue</li> <li>4 = Black</li> </ul>   | -           | -              | DC           | 4 pole              | 2000         | DC sensors NanoView, 4 pole, M8, 24 AWG            | <b>CSNS4A4CY2402</b><br>100060 |                               |              |
|  | -           | -              |              |                     | 5000         | DC sensors NanoView, 4 pole, M8, 24 AWG            | <b>CSNS4A4CY2405</b><br>100065 |                               |              |
|  | -           | -              |              |                     | 10000        | DC sensors NanoView, 4 pole, M8, 24 AWG            | <b>CSNS4A4CY2410</b><br>100066 |                               |              |
|  <ul style="list-style-type: none"> <li>1 = Brown</li> <li>2 = No wire</li> <li>3 = Blue</li> <li>4 = Black</li> </ul>  | -           | -              | DC           | 4-pole, 3-conductor | 2000         | DC sensors, 4 pole, 2 or 3-wire connection, M12    | <b>CSDS4A3CY2202</b><br>136287 |                               |              |
|  | -           | -              |              |                     | 5000         |  | <b>CSDS4A3CY2205</b><br>136288 |                               |              |
|  | -           | -              |              |                     | 10000        |  | <b>CSDS4A3CY2210</b><br>136289 |                               |              |
|  <ul style="list-style-type: none"> <li>1 = Brown</li> <li>2 = White</li> <li>3 = Blue</li> <li>4 = Black</li> <li>5 = Green/Yellow</li> </ul>  | -           | -              | DC           | 5 pole              | 5000         | DC sensors, IntelliView E75-DST4..., 5 pole, M12   | <b>CSDS5A5CY2205</b><br>166986 |                               |              |
|  | -           | -              |              |                     | 10000        |  | <b>CSDS5A5CY2210</b><br>166987 |                               |              |
|  <ul style="list-style-type: none"> <li>1 = White</li> <li>2 = Brown</li> <li>3 = Green</li> <li>4 = Yellow</li> <li>5 = Gray</li> <li>6 = Pink</li> <li>7 = Blue</li> <li>8 = Red</li> </ul> | -           | -              | DC           | 8 pole              | -            | DC sensors, IntelliView E76-CLR..., 8 pole, M12    | <b>CSDS8A8CB2402</b><br>100578 |                               |              |
|  | -           | -              |              |                     | -            |  | <b>CSDS8A8CB2410</b><br>100580 |                               |              |
|  | -           | -              |              |                     | -            |  | <b>CSDS8A8CB2405</b><br>100579 |                               |              |

WWW.TM2A.PT info@tm2a.pt

WWW.TM2A.PT info@tm2a.pt








| Pin assignment  | Description | Switching type | Voltage type | Pole                | Length<br>mm | For use with                                       | Part no.<br>Article no.            | Price<br>see price list | Std. pack |
|---|-------------|----------------|--------------|---------------------|--------------|--|------------------------------------|-------------------------|-----------|
| <b>Open wire end</b>  |             |                |              |                     |              |  |                                    |                         |           |
| <b>Coupling, angled</b>   |             |                |              |                     |              |  |                                    |                         |           |
|       | -           | -              | AC           | 3 pole              | 2000         | AC sensors, 3 pole, M12                            | <b>CSAR3F3CY2202</b><br>136262     |                         | 1 off     |
|   | -           | -              |              |                     | 5000         |  | <b>CSAR3F3CY2205</b><br>136263     |                         |           |
|   | -           | -              |              |                     | 10000        |  | <b>CSAR3F3CY2210</b><br>136264     |                         |           |
|    | -           | -              | DC           | 4 pole              | 2000         | DC sensors, 4 pole, 2, 3 or 4-wire connection, M12 | <b>CSDR4A4CY2202</b><br>136279     |                         |           |
|   | -           | -              |              |                     | 5000         |  | <b>CSDR4A4CY2205</b><br>136282     |                         |           |
|   | -           | -              |              |                     | 10000        |  | <b>CSDR4A4CY2210</b><br>136284     |                         |           |
|    | -           | -              | DC           | 4-pole, 3-conductor | 2000         | DC sensors, 4 pole, 2 or 3-wire connection, M12    | <b>CSDR4A3CY2202</b><br>136272     |                         |           |
|   | -           | -              |              |                     | 5000         |  | <b>CSDR4A3CY2205</b><br>136273     |                         |           |
|   | -           | -              |              |                     | 10000        | DC sensors, 4 pole, 2 or 3-wire connection, M12    | <b>CSDR4A3CY2210</b><br>136276     |                         |           |
|    | LED         | NPN            | DC           | 4-pole, 3-conductor | 5000         | DC sensors, 4 pole, 2 or 3-wire connection, M12    | <b>CSDR4A3CY2205-LN</b><br>136274  |                         |           |
|   | LED         | PNP            |              |                     |              |  | <b>CSDR4A3CY2205-LP</b><br>136275  |                         |           |
|   | -           | -              | DC           | 5 pole              | 2000         | DC sensors, IntelliView E75-DST4..., 5 pole, M12   | <b>CSDR5A5CY2202</b><br>166983     |                         |           |
|   | -           | -              |              |                     | 5000         |  | <b>CSDR5A5CY2205</b><br>166984     |                         |           |
|   | -           | -              |              |                     | 10000        |  | <b>CSDR5A5CY2210</b><br>166985     |                         |           |
| <b>Plug, straight</b>   |             |                |              |                     |              |  |                                    |                         |           |
| <b>Coupling, straight</b>   |             |                |              |                     |              |  |                                    |                         |           |
|   | -           | -              | DC           | 4 pole              | 1000         | DC sensors, 4 pole, 2, 3 or 4-wire connection, M12 | <b>CSDS4A4CY2201-D</b><br>136291   |                         | 1 off     |
|   | -           | -              |              |                     | 1500         |  | <b>CSDS4A4CY2201.5-D</b><br>136316 |                         |           |
|   | -           | -              |              |                     | 3000         |  | <b>CSDS4A4CY2203-D</b><br>136293   |                         |           |
|   | -           | -              |              |                     | 5000         |  | <b>CSDS4A4CY2205-D</b><br>136295   |                         |           |
| <b>Plug, angled</b>   |             |                |              |                     |              |  |                                    |                         |           |
| <b>Coupling, straight</b>   |             |                |              |                     |              |  |                                    |                         |           |
|   | -           | -              | DC           | 4 pole              | 1000         | DC sensors, 4 pole, 2, 3 or 4-wire connection, M12 | <b>CSDR4A4CY2201-D</b><br>136278   |                         | 1 off     |
|   | -           | -              |              |                     | 1500         |  | <b>CSDR4A4CY2201.5-D</b><br>136313 |                         |           |
|   | -           | -              |              |                     | 2000         |  | <b>CSDR4A4CY2202-D</b><br>136314   |                         |           |
|   | -           | -              |              |                     | 3000         |  | <b>CSDR4A4CY2203-D</b><br>136315   |                         |           |
|   | -           | -              |              |                     | 5000         |  | <b>CSDR4A4CY2205-D</b><br>136283   |                         |           |
| <b>material sold by the meter</b>   |             |                |              |                     |              |  |                                    |                         |           |
|    | -           | -              | AC, DC       | 3 pole              | -            | Plug, coupling M8 x 1                              | <b>CS3ACY24XX</b><br>100033        |                         | 1 off     |
|   | -           | -              |              | 4 pole              | -            | Plug, coupling M12 x 1                             | <b>CS4ACY22XX</b><br>100046        |                         |           |













WWW.TM2A.PT info@tm2a.pt






WWW.TM2A.PT info@tm2a.pt

WWW.TM2A.PT info@tm2a.pt

WWW.TM2A.PT info@tm2a.pt


|   | Description                   | Length<br>mm | Switch-<br>ing type | Pole   | For use with                                       | Material        | Part no.<br>Article no.  | Price<br>see price<br>list | Std.<br>pack |
|---|-------------------------------|--------------|---------------------|--------|--|-----------------|--------------------------|----------------------------|--------------|
| <b>Coupling</b>   |                               |              |                     |        |  |                 |                          |                            |              |
|    | angled                        | -            | -                   | 4 pole | DC sensors, 4 pole, 2, 3 or 4-wire connection, M12 | -               | <b>CSDR4</b><br>136271   |                            | 1 off        |
|   |                               | -            | -                   |        | DC sensors, 4 pole, 2, 3 or 4-wire connection, M8  | -               | <b>CSNR4</b><br>100047   |                            |              |
|    | straight                      | -            | -                   | 3 pole | DC sensors, 3 pole, 2 or 3-wire connection, M8     | -               | <b>CSNS3</b><br>100054   |                            |              |
|   |                               | -            | -                   | 4 pole | DC sensors, 4 pole, 2, 3 or 4-wire connection, M12 | -               | <b>CSDS4</b><br>136286   |                            |              |
|   |                               | -            | -                   | -      | -  | -               | <b>CSNS4</b><br>100055   |                            |              |
| <b>Plug</b>   |                               |              |                     |        |  |                 |                          |                            |              |
|    | angled                        | -            | -                   | 4 pole | DC sensors, 4 pole, 2, 3 or 4-wire connection, M12 | -               | <b>CSDRM4</b><br>136285  |                            | 1 off        |
|   |                               | -            | -                   |        | DC sensors, 4 pole, 2, 3 or 4-wire connection, M8  | -               | <b>CSNRM4</b><br>100053  |                            |              |
|    | straight                      | -            | -                   | 3 pole | DC sensors, 3 pole, 2 or 3-wire connection, M8     | -               | <b>CSNSM3</b><br>100067  |                            |              |
|   |                               | -            | -                   | 4 pole | DC sensors, 4 pole, 2, 3 or 4-wire connection, M12 | -               | <b>CSDSM4</b><br>136297  |                            |              |
|   |                               | -            | -                   | -      | -  | -               | <b>CSNSM4</b><br>100068  |                            |              |
| <b>Protection cap</b>   |                               |              |                     |        |  |                 |                          |                            |              |
|    | Plug-in connection<br>M12 x 1 | -            | -                   | -      | M12 (micro) multi-connector strip Plug             | -               | <b>CBMCAP</b><br>136298  |                            | 1 off        |
|   |                               | -            | -                   | -      | M12 (micro) multi-connector strip Coupling         | -               | <b>CBCAP</b><br>136317   |                            |              |
|  | Plug-in connection<br>M12 x 1 | -            | -                   | -      | M12 sensors, inductive                             | -               | <b>E57KP12</b><br>136202 |                            |              |
|   |                               | -            | -                   | -      | M18 sensors, inductive                             | -               | <b>E57KP18</b><br>136203 |                            |              |
|   |                               | -            | -                   | -      | M30 sensors, inductive                             | -               | <b>E57KP30</b><br>136204 |                            |              |
|   |                               | -            | -                   | -      | -  | -               | -                        | -                          |              |
| <b>Conduit adapter</b>  |                               |              |                     |        |  |                 |                          |                            |              |
|  | Plug-in connection<br>M12 x 1 | -            | -                   | -      | M8 sensors   | Metal           | <b>E57KC8</b><br>136187  |                            | 1 off        |
|   |                               | -            | -                   | -      | M12 sensors  |                 | <b>E57KC12</b><br>136184 |                            |              |
|   |                               | -            | -                   | -      | M18 sensors  |                 | <b>E57KC18</b><br>136185 |                            |              |
|   |                               | -            | -                   | -      | M30 sensors  |                 | <b>E57KC30</b><br>136186 |                            |              |
|   |                               | -            | -                   | -      | M30 sensors  | Stainless steel | <b>E58KC30</b><br>135754 |                            |              |
|   |                               | -            | -                   | -      | M30 sensors  |                 |                          |                            |              |

|   | Design (outer dimensions)<br>mm            | For use with                | Material           | Part no.<br>Article no.     | Price<br>see price<br>list | Std.<br>pack |
|---|--|-----------------------------|--------------------|-----------------------------|----------------------------|--------------|
| <b>Fixing bracket</b>   |  |                             |                    |                             |                            |              |
|    | -  | M8 sensors                  | Stainless steel    | <b>E57KM8</b><br>136191     |                            | 1 off        |
|   | -  | M12 sensors                 |                    | <b>E57KM12</b><br>136188    |                            |              |
|   | -  | M18 sensors                 |                    | <b>E57KM18</b><br>136189    |                            |              |
|   | -  | M30 sensors                 |                    | <b>E57KM30</b><br>136190    |                            |              |
|    | 38 x 38 x 44                               | M18 sensors                 | aluminum           | <b>6161A-6501</b><br>135736 |                            | 2 off        |
|    | 76 x 38                                    |                             |                    | <b>6161AS5295</b><br>135737 |                            |              |
|    | 38 x 38 x 44                               |                             |                    | <b>6161AS7050</b><br>135741 |                            |              |
|    | 69 x 76 x 64                               | M30 sensors                 | Metal              | <b>6167A-6501</b><br>135742 |                            |              |
|    | 51 x 102 x 41<br>adjustable, insulated     | M18 sensors                 | Stainless steel    | <b>E58KAM18</b><br>135749   |                            |              |
|   | 51 x 102 x 41<br>adjustable, not insulated | M18 sensors                 |                    | <b>E58KAM18U</b><br>135751  |                            |              |
|   | 51 x 102 x 50<br>adjustable, insulated     | M30 sensors                 |                    | <b>E58KAM30</b><br>135752   |                            |              |
|   | 51 x 102 x 50<br>adjustable, not insulated | M30 sensors                 |                    | <b>E58KAM30U</b><br>135753  |                            |              |
|  | 38 x 38 x 44<br>with ball joint            | M18 sensors                 | Insulated material | <b>E58KAM18B</b><br>135750  |                            |              |
|  | -  | E71 NanoView series         | Metal              | <b>E71-MTB1</b><br>100520   |                            |              |
|  | -  | E75-PPA...                  | Metal              | <b>E75-MTB1</b><br>100537   |                            |              |
|  | -  | E76-CLR...<br>E75-PP1MP-M12 | Metal              | <b>E76-MTB1</b><br>100538   |                            |              |
|  | 53 x 44                                    | Comet series                | Stainless steel    | <b>6161AS5296</b><br>135738 |                            |              |
|  | 53 x 44                                    | Comet series                | Stainless steel    | <b>6161AS5297</b><br>135739 |                            |              |

|   | Description    | Design (outer dimensions)<br>mm | For use with   | Material           | Part no.<br>Article no.     | Price<br>see price list     | Std. pack |       |
|---|----------------|---------------------------------|--|--------------------|-----------------------------|-----------------------------|-----------|-------|
| <b>Replacement nuts</b>   |                |                                 |  |                    |                             |                             |           |       |
|    | -              | -                               | M8 sensors   | Metal              | <b>E57KNM8</b><br>136194    |                             | 2 off     |       |
|   | -              | -                               | M12 sensors  |                    | <b>E57KNM12</b><br>136193   |                             | 2 off     |       |
|    | -              | -                               | M18 sensors  | Insulated material | <b>E57KNC18</b><br>136192   |                             | 2 off     |       |
|    | -              | -                               | M12 sensors  | Stainless steel    | <b>E57KNS12</b><br>136195   |                             | 2 off     |       |
|   | -              | -                               | M18 sensors  |                    | <b>E57KNS18</b><br>136196   |                             | 2 off     |       |
|   | -              | -                               | M30 sensors  |                    | <b>E57KNS30</b><br>136197   |                             | 2 off     |       |
|   | -              | -                               | M18 sensors<br>E58-Serie                                     |                    | <b>E58KNS18</b><br>135755   |                             | 1 off     |       |
|   | -              | -                               | M30 sensors<br>E58-Serie                                     |                    | <b>E58KNS30</b><br>135756   |                             | 1 off     |       |
| <b>Sensor fixing</b>  |                |                                 |  |                    |                             |                             |           |       |
|    | -              | -                               | M8 sensors, inductive  | -                  | <b>E57KNZ8</b><br>136201    |                             | 1 off     |       |
|   | -              | -                               | M12 sensors, inductive                                       | -                  | <b>E57KNZ12</b><br>136198   |                             |           |       |
|   | -              | -                               | M18 sensors, inductive                                       | -                  | <b>E57KNZ18</b><br>136199   |                             |           |       |
|   | -              | -                               | M30 sensors, inductive                                       | -                  | <b>E57KNZ30</b><br>136200   |                             |           |       |
| <b>Retro-reflector</b>  |                |                                 |  |                    |                             |                             |           |       |
|  | Adhesive film  | Ø 33 mm                         | Reflex photoelectric sensor with or without polarized filter | Insulated material | <b>6200A-6504</b><br>135745 |                             | 1 off     |       |
|   | Adhesive film  | Ø 61 mm                         |  |                    | <b>6200A-6505</b><br>135746 |                             |           |       |
|   | Screw mounting | Ø 61 mm                         |  |                    | <b>6200A-6502</b><br>135744 |                             |           |       |
|   | Screw mounting | Ø 63 mm                         |  |                    | <b>E65KR55</b><br>135758    |                             |           |       |
|   | Screw mounting | Ø 84 mm                         |  |                    | <b>6200A-6501</b><br>135743 |                             |           | 2 off |
|   | Screw mounting | Ø 84 mm                         |  |                    | Plastic/metal               | <b>6200A-6506</b><br>135747 |           |       |
|   | Screw mounting | 38 x 81 mm                      |  | Insulated material | <b>6200A-6507</b><br>135748 |                             |           | 1 off |


Dimensions

Retro-reflector

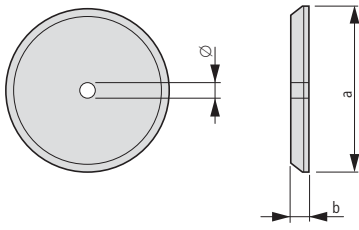

|            | a         | b          | ∅        |
|------------|-----------|------------|----------|
| 6200A-6501 | 3.30 (84) | 0.35 (9)   | 0.20 (5) |
| 6200A-6502 | 2.40 (61) | 0.30 (7.5) | -        |
| 6200A-6504 | 1.30 (33) | 0.25 (6)   | -        |
| 6200A-6505 | 2.40 (61) | 0.30 (7.5) | 0.25 (6) |
| 6200A-6506 | 3.30 (84) | 0.30 (7.5) | 0.20 (5) |

E65KR55






Fixing bracket


E58KAM18

E58KAM18U

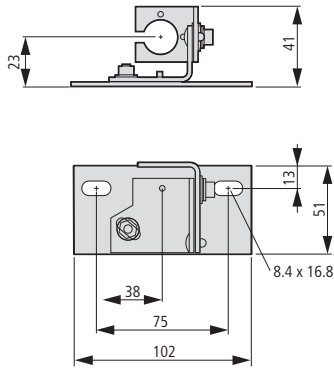


6161A-6501

6161AS-6501

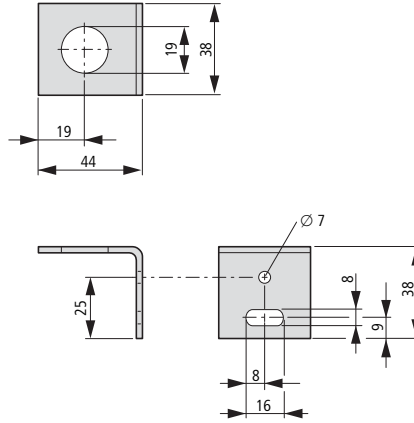


E58KAM30

E58KAM30U

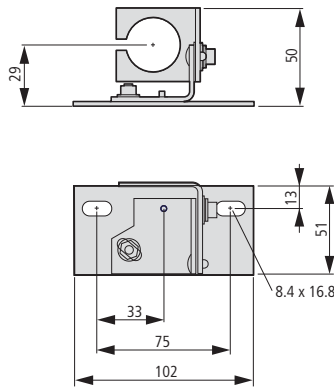




6167A-6501

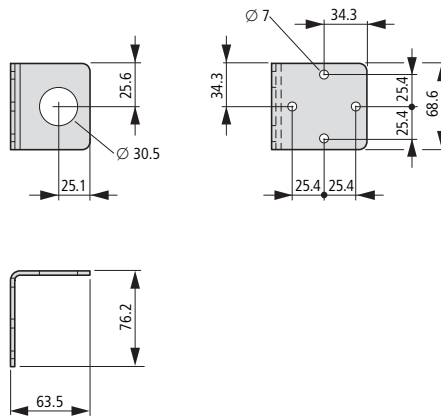



E58KAM18B

6161AS-7050

6161AS-5295

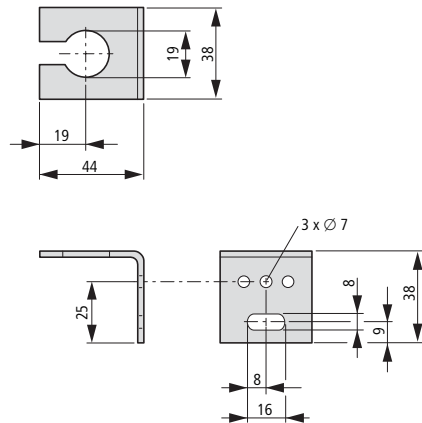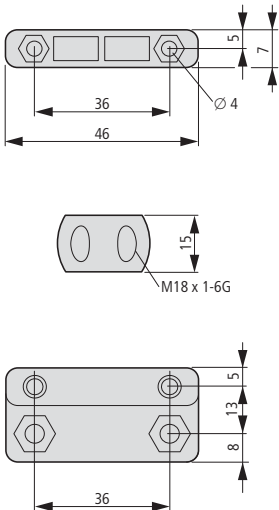

E57KM...




|       | a   | b  | c  | d  | e  | f  | g  | h |
|-------|-----|----|----|----|----|----|----|---|
| 8 mm  | 76  | 34 | 29 | 17 | 31 | 19 | 8  | 6 |
| 12 mm | 76  | 34 | 29 | 17 | 31 | 19 | 12 | 6 |
| 18 mm | 76  | 34 | 29 | 17 | 31 | 19 | 18 | 6 |
| 30 mm | 108 | 55 | 45 | 25 | 51 | 29 | 30 | 7 |

WWW.TM2A.PT info@tm2a.pt

WWW.TM2A.PT info@tm2a.pt

Conduit adapter


E57KC...

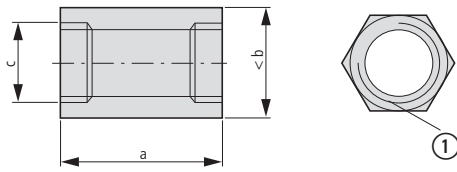

|       | a  | b  | c       |
|-------|----|----|---------|
| 8 mm  | 25 | 25 | M8x1    |
| 12 mm | 38 | 25 | M12x1   |
| 18 mm | 38 | 25 | M18x1   |
| 30 mm | 48 | 38 | M30x1.5 |

① 1/2" - 14 NPT for conduit


E58KC30

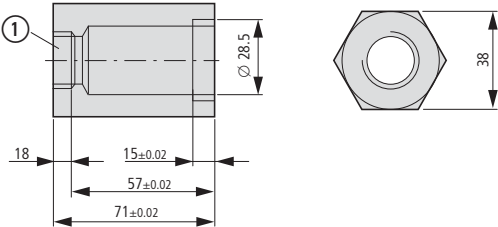

① 1/2" - 14 NPT for conduit

Sensor fixing

E57KNZ

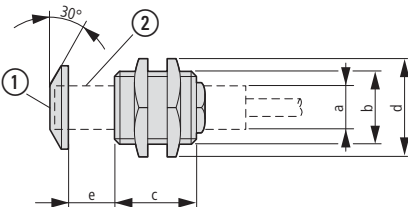


① Protection cap  
② Overtravel


| Sensor | a       | b       | c         | d         | e         |
|--------|---------|---------|-----------|-----------|-----------|
| 8 mm   | M8 x 1  | M16x1.5 | o.87 (22) | o.87 (22) | 0.35 (9)  |
| 12 mm  | M12x1   | M22x1.5 | o.87 (22) | 1.12 (29) | 0.41 (10) |
| 18 mm  | M18x1   | M30x1.5 | 1.17 (30) | 1.41 (36) | 0.49 (12) |
| 30 mm  | M30x1.5 | M47x1.5 | 1.47 (37) | 1.72 (51) | 0.57(15)  |

Connecting cables


Coupling straight, cable end open

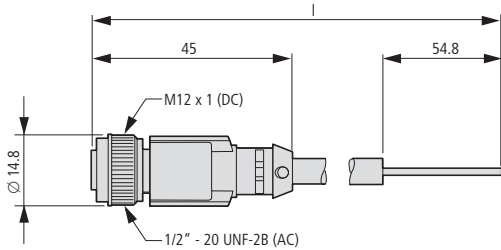


Coupling angled, cable end open

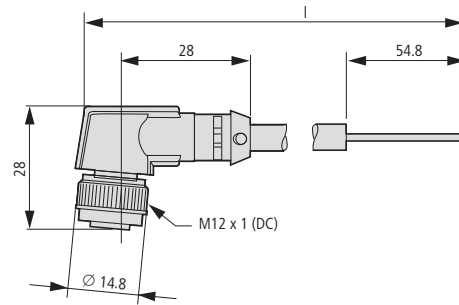

Straight coupling, straight plug

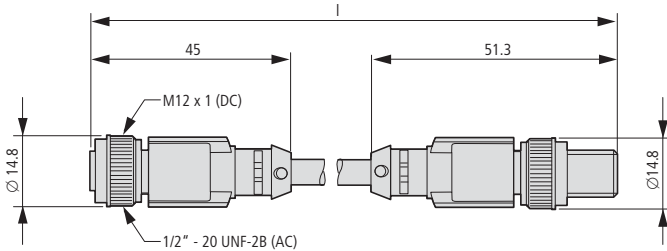

Coupling angled, angled

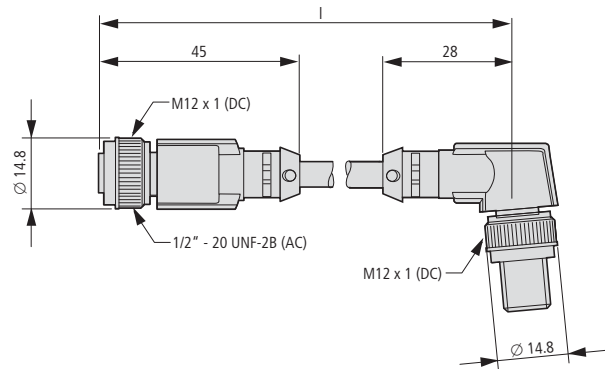

### Basic Information

Sensors are devices that sense the presence or absence of objects. Sensors perform a number of functions in automated manufacturing and material handling systems. For example, sensors can determine if an object is present, if tooling is broken, or if product is running down a conveyor line.

A sensor can be thought of as an automatic switch. In a factory, a sensor can be used to detect a problem on the line and stop the line automatically.

Sensors have contributed significantly to recent advances in manufacturing technology. The use of sensors makes it possible to increase the degree of automation in processes and systems. In addition, it eliminates the need for human operators to monitor and control situations.

The two main categories of sensors are proximity sensors and light sensors.

#### Proximity Sensors



This type of sensor uses an electromagnetic or electrical field to detect when an object is near. There is no physical contact between the object and the sensor. Inductive proximity sensors detect only metal objects. Capacitive proximity sensors can sense both metallic and non-metallic objects.

Proximity sensors can be used, for example, to ensure that a part in a manufacturing process is aligned within a specific tolerance.

This type of sensor is generally used to sense at distances less than one inch (2.5 cm).

#### Photoelectric sensors



This type of sensor uses light to detect the presence or absence of an object.

A **thru-beam photoelectric sensor** uses two devices on opposite sides (a source and a detector).



Detection occurs when an object blocks or breaks the beam of light passing between them.



Light beam blocked: object detected

- ① Source
- ② Detector



A **diffuse reflective sensor** (proximity sensing) emits a beam of light that must be reflected by the target object in order for the object to be detected.



Reflected light beam: object detected

- ① Source
- ② Detector

A **retroreflective sensor** emits a beam of light that is reflected towards the sensor by a reflector. An object is detected when it blocks the beam of light between the sensor and the reflector. We will go over this type of light sensor in greater detail later on in this chapter.



Light beam blocked: object detected

- ① Source
- ② Detector

Most electric garage door openers include a light sensor for safety reasons. If the light sensor's beam of light is blocked (by a child, for example) while the door is being closed, the sensor will tell the door opener to reverse the direction of the door's movement or to stop the door.

Although environmental factors can affect light sensors, these devices have a long sensing range. The objects they detect can be of any material.

#### Sensor Comparison

Each of the two sensor categories has its strengths and weaknesses. The table below provides you with a comparison.

|                           | Proximity Sensors   | Light sensors   |
|---------------------------|---|---|
| Method of Detection       | Electromagnetic/electrical field                                  | Light beam  |
| Sensing Range             | Close: within 2.5 cm (1 in)                                       | Far: can be 800 ft (240 m)  |
| Target Material           | Inductive: metallic only<br>Capacitive: metallic and non-metallic | Can be affected by target surface, for example, if the target is shiny or transparent |
| Object Markings           | Not able to detect  | Able to detect  |
| Cost                      | Low   | Low to high depending upon sensing method   |
| Sensor Size               | Small to large  | Very small (fiber optic) to large   |
| Environmental Sensitivity | Inductive: electrical interference<br>Capacitive: humidity        | Light interference  |
| Response Time             | Milliseconds  | Microseconds  |

## Inductive Proximity Sensors

The inductive proximity sensor can be used to detect metal objects. It does this by creating an electromagnetic field.

With the ability to detect at close range, inductive proximity sensors are very useful for precision measurement and inspection applications.

### Strengths and Weaknesses

#### Strengths

- Immune to adverse environmental conditions.
- High switching frequencies for fast processes.
- Can detect metallic targets through non-metallic barriers
- Long operational life with virtually unlimited operating cycles.
- Bounceless switch outputs; e.g., to PLCs.

#### Weaknesses

- Limited sensing range (maximum of 25 mm, also up to 100 mm in E56 series).
- Detects only metal objects.
- May be affected by metal chips accumulating on sensor face.

### Scopes of application

Proximity sensors are used in a variety of applications. For example:

- Detecting the limit of a positioning table's travel
- Determining a speed by counting the teeth on a sprocket
- Checking whether a valve is fully open or closed

Proximity sensors can be used to detect the presence or absence of metallic workpieces or workpiece fixtures on conveyor belts.

Inductive sensors can be used to control robotic arms. They can be used, for example, to ensure that objects are actually gripped correctly.


In metal machining, proximity sensors can make sure the workpiece is mounted in the fixture correctly, and that the drill bit has not broken off.

### How an Inductive Proximity Sensor Works

Inductive proximity sensors generate a high-frequency (HF) electromagnetic field. When a metal object is brought near the sensor's face, the field changes. The detector circuit detects this change and the sensor switches an output to a connected device. Each sensor has a specific sensing range, which ensures that metallic objects will be detected with utmost precision in a repeatable manner.

### Surface mounting

Let's look at the components and the process step-by-step:

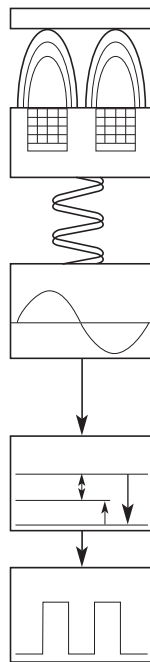

#### Components

A metal object, or target, enters the sensing field.

The **sensor coil** is a coil of wire typically wound around a ferrite core. If you could see the electromagnetic field created by it, it would be cone shaped. The target will pass through this field.

The ferrite core shapes the field and the size of the coil determines the sensing range.


The **oscillator circuit** makes the field oscillate at a specific high frequency (100 kHz to 1 MHz). The presence of metal in the field causes this vibration to change. Eddy currents, which take energy from the field, are induced on the target object. Accordingly, the metallic object causes a change in the magnetic field. This change creates a damping effect on the amount of signal that cycles back to the sensor coil. The amplitude is reduced accordingly.

The **detector circuit** detects this change and switches at a specific set-point value. This signal, in turn, produces a change at the switching output.

The output remains active until the target leaves the sensing field. The oscillator responds with an increase in amplitude, and when it reaches the setpoint value, the detector circuit switches. The output returns to its normal state.

### Hysteresis

Hysteresis is a fixed distance between the ON and OFF points. If hysteresis were not included in a sensor's design, the output would continuously switch on and off when close to the operating point.

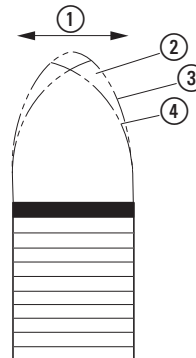

#### Hysteresis

- ① Direction of movement
- ② Hysteresis
- ③ operate point
- ④ release point

With hysteresis, the operate point and the release point are slightly different distances from the sensor face.

### Proximity Sensor Types

Proximity sensors come in a wide variety of designs to meet the requirements of almost any industrial application.

- Tubular



This is the design of choice for a growing number of applications. The small size allows for easy mounting in a fixture or for use in tight spaces found on many assembly lines.

- Right angle tubular



This design enables mounting in tight locations.

- Plastic housing



This corrosion-resistant unit performs well in high wash-down areas or places where caustic chemicals abound.

- Pancake



The extra-large coil in this unit makes it possible to achieve the widest and tallest available sensing range of 100 mm. It is ideal for use in heavy industry applications and for the assembly of large components.

### Inductive Proximity Sensor Influences

When applying inductive proximity sensors, it is important to understand the sensing range and the factors that influence that range. The sensing range refers to the distance between the sensor face and the target.

Four considerations are of particular importance when selecting and using proximity sensors:

- Target considerations (material, size, shape and approach)
- Coil size and screening
- Sensor mounting requirements
- Environment

#### Target Material

The target object's material will affect the maximum sensing range. If this maximum distance is exceeded, the damping effect needed to switch the sensor output will not be produced and the sensor will not detect the target object.

Proximity sensors work best with ferrous alloys. Though these sensors detect other metals, the range will not be as great. Generally, the less iron in the target, the closer the target has to be to the sensor to be detected.

Manufacturers generally provide charts showing the necessary correction factors for various types of metals when applying their sensors. Each sensor style will have a correction factor to enable calculation for a particular target material.

#### Correction factors

Multiply the sensing distance by the factor given below.

| Target object                     | Sensor size |       |       |       | Limit Switch Style |
|-----------------------------------|-------------|-------|-------|-------|--------------------|
|                                   | 4 - 8 mm    | 12 mm | 18 mm | 30 mm |                    |
| Stainless Steel 400 <sup>1)</sup> | 0.90        | 0.90  | 1.0   | 1.0   | 1.0                |
| Stainless Steel 300 <sup>2)</sup> | 0.65        | 0.70  | 0.70  | 0.75  | 0.85               |
| Brass                             | 0.35        | 0.45  | 0.45  | 0.45  | 0.5                |
| Aluminium                         | 0.35        | 0.40  | 0.45  | 0.40  | 0.47               |
| Copper                            | 0.30        | 0.25  | 0.35  | 0.30  | 0.40               |

- <sup>1)</sup> Stainless steel 400 series to ASTM A240, martensitic or ferritic, magnetizable.
  - <sup>2)</sup> Stainless steel 300 series to ASTM A240, austenitic, non-magnetizable.
- The index of stainless steels is provided in EN 10088-1.

#### Target Size

If the target object is smaller than the sensor's "standard target size," the sensing range will also be smaller. This is because a smaller target creates a weaker eddy current. However, a bigger target does not mean a longer sensing range.

The thickness of the target does not impact sensing range much. However, a very thin non-ferrous target can actually achieve a greater sensing range because it generates an eddy current on both sides.


So, how big should the target be? The rule of thumb is: the size of the sensor's diameter, or three times the sensor's sensing range, whichever is greater.

**Target Shape**

The shape of the target can have an impact on the sensing range. A round object, or an object with a rough surface can affect the damping effect of the sensor, and may require a closer sensing distance. Using a larger sensor size or an extended range sensor will also minimize this effect.

**Target Approach**


How the target approaches the sensor matters as well. When an object comes at the sensor straight on, that's an **axial approach**. With this type of approach, you will need to protect the sensor physically. Allow for 25% over-travel.



**Axial Approach**

- ① sensing face

Hysteresis tends to be greater for an axial approach than a lateral approach.



**Lateral Approach**

- ① recommended detection range
- ② Target

On a slide-by, or **lateral approach**, the target approaches the center axis of the sensing field from the side (lateral).


The target should not pass closer than the basic tolerance built into the machine design.

For both approach types, it is necessary to ensure that the distance between the target object and the sensor face does not exceed 75% of the sensing range.

**Coil/Core Size**

An important factor in the range of the sensor is the construction of the coil/core. An open coil with no core will produce a field that could be actuated by a target from any direction. That wouldn't be recommended for industrial applications.

For an inductive proximity sensor, the sensor coil that generates the field fits inside of a ferrite core. This cup-shaped piece of ferrite material is called a **cup core**. This core directs the field and shapes it.



**Coil/Core Construction**

- ① Protection cap
- ② Coil
- ③ Cup core
- ④ Sensor head


A protective **cap** prevents dust or other environmental hazards from entering the sensor.

**Screening**

The coil can be screened in order to focus the field strength. In standard range sensors, the ferrite cup core will shape the field in such a way that it is emitted straight forward from the sensor's sensing face - i.e., "screened" in a manner of speaking.

An extended-range coil/core assembly does not use the standard cup core, but rather just a ferrite core. This unshielded sensor makes it possible to expand the sensing range. The reason why is that there is less ferrite to absorb the electromagnetic field. Accordingly, the sensor's effective range will become wider and a little longer.

The decision to use an unshielded sensor will impact the mounting of the sensor, as we will discuss that next.



**Screening**


- ① flush mounting (screened)
- ② non-flush mounting (unscreened)

**Mounting Considerations**

A flush-mounted screened sensor can be fully embedded in a metal mounting block without affecting the sensor's sensing range.

In contrast, an unshielded sensor will require a certain distance (metal-free zone) around it - this distance will depend on the sensor's sensing range. Otherwise, the sensor will sense the metal fixing and be continuously operating.

Accordingly, a sensor's design (screening) will affect the way it is mounted.




**Clear Zone**

- ① flush mounting (screened)
- ② non-flush mounting (unscreened)

Mounting two sensors closely together can also be a problem. If you position two proximity sensors too close together—either side by side or facing each other head to head—the two fields will clash with one another. Each sensor needs to be mounted at least three times its own sensing range away from the other. The use of an alternative frequency head on one of the sensors will prevent adjacent sensors' sensing fields from interacting.

**Mounting Ranges**



|              | a      | b          |
|--------------|--------|------------|
| shielded     | 0      | 0          |
| unshielded   | 2 x Sn | Cap height |
| semishielded | Sn     | d          |

**Environment**

The sensor's environment can affect its performance dramatically. Some of these environmental factors are:

- Debris  
Debris can accumulate on the sensing cap, changing the range of the sensing field. In an application where metal chips are created, the sensor should be mounted to prevent those chips from building up on the sensor face. If this is not possible, then coolant fluid should be used to wash the chips off the face. An individual chip generally doesn't have enough surface area to cause the sensor to turn on, but several of them could extend the sensing range and interfere with the accuracy of the sensor.

- Electrical cables  
Magnetic fields caused by electrical wiring located in the vicinity may affect sensor operation. If the field around the wires reaches an intensity that would saturate the ferrite or the coil, the sensor will not operate. Sensors used in areas with high frequency welders can also be affected. To compensate for a welder, weld field immune sensors can be installed. Or, if the sensor is used with a PLC, a time delay can be programmed to ignore the signal from the sensor for the time period that the welder is operating.


- High frequency source (HF)  
RF sources (such as walkie-talkies) can produce signals that use the same frequency as the sensor's oscillator circuit. This is called radio frequency interference (RFI). Sensors have integrated EMC protection components in order to provide maximum protection against radio frequency interference and sensor malfunctions.

Electrical interference from nearby motors, solenoids, relays and the like could have an affect on sensor operation as well.

- Induced line or current spike  
An induced line or current spike can cause a false operation of the sensor. This spike can be produced by the electrical arc created when an electrical/mechanical switch or a contactor closes. If the lines connecting the sensor and these devices are adjacent and parallel to one another, the spike will affect the sensor. Most codes and specifications call for a separation of control and power leads.

- Ambient air temperature  
The ambient temperature can affect sensing range. The effect is referred to as temperature drift. The sensing range can change by as much as ±10%.

Component variations, power-line noise, ambient air temperature, and the effects of normal machine wear can all contribute to changes in sensing ranges. Because of this, sensors must be selected in such a way that they will detect target objects at 75% of the nominal switching distance and will be deactivated at 125%.



**Sensing Distance Tolerances**

- ① Target
- ② Nominal sensing range
- ③ Maximum reset distance
- ④ Maximum real operating range

## Capacitive Proximity Sensors

Capacitive proximity sensors basically have the same function as inductive proximity sensors, but their detection method is considerably different.



### Capacitive Proximity Sensors

Capacitive proximity sensors are designed to detect both metallic and nonmetallic targets. They are ideally suited for liquid level control and for sensing powdered or granulated material.

### Strengths and Weaknesses

Consider these strengths and weaknesses of the capacitive proximity sensor:

#### Strengths

- Can detect both metallic and non-metallic objects at greater ranges than inductive sensors.
- High switching rate for rapid response applications (counting).
- Can detect liquid targets through non-metallic barriers (glass, plastic).
- Long operation life, solid-state output for "bounce free" signals

#### Weaknesses

- Affected by varying temperature, humidity and moisture
- Not as accurate as inductive proximity sensors

### Scopes of application

Here are some examples showing how the detection power of capacitive proximity sensors is used:

- Detecting liquid levels in order to prevent overflowing and dry-running is a frequent application in the packaging industry.
- Checking material quantities in order to make sure, for example, that the label roll on a labeling line is not completely used up.
- Counting applications, such as tracking units passing a point on a conveyor.
- Injection molding machines: detecting the fill level of the plastic granules in the feed hopper.


### Capacitive Proximity Sensor Operation

A capacitor consists of two metal plates separated by a insulator (called a **dielectric**). The function of this type of sensor is based on dielectric capacitance, which is the ability of a dielectric to store an electrical charge.

The distance between the plates determines the ability of the capacitor to store a charge.

The capacitance value changes when an object enters the electric field. This change is evaluated for the switching

function.



#### Capacitor

- ① Plates
- ② Dielectric


When this principle is applied to the capacitive proximity sensor, one capacitive plate is part of the switch, the enclosure (the sensor face) is the insulator. The target is the other "plate." Earth is the common path.

Capacitive proximity sensors can detect any target that has a dielectric constant greater than air. Liquids have high dielectric constants. Metal also makes a good target.

The capacitive proximity sensor has four basic elements: a sensor (which is a dielectric), an oscillator circuit, a detector circuit and an output circuit.


When an object approaches the sensor, the capacitor's permittivity changes and the vibration in the oscillator circuit starts. This means that capacitive sensors work exactly the opposite way as inductive proximity sensors, in which the vibration is damped when a target object approaches.

### Oscillator Damping



Inductive  
I = Current in oscillator circuit


The **detector circuit** monitors the oscillator's output. When it detects sufficient change in the field, it switches on the output circuit.



Capacitive  
I = Current in oscillator circuit

The output circuit remains active until the target leaves the sensing field. The oscillator then responds by reducing the amplitude. The detector circuit is switched off if the change in the electric field becomes too small.

The internally fixed difference between the vibration's ON and OFF amplitudes forms the hysteresis.

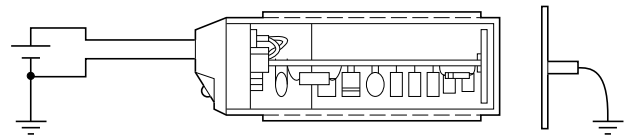

Capacitive Proximity Sensor Operation

### Capacitive Proximity Sensor Influences

Typically, capacitive sensors have a greater sensing range than inductive sensors.

Sensing distance for capacitive proximity sensors is dependent on plate diameter. With inductive proximity sensors, the size of the coil is the determining factor.

### Typical Proximity Sensing Ranges

| non-flush sensor with $\varnothing$ | Inductive | Capacitive |
|-------------------------------------|-----------|------------|
| 18 mm                               | 8 mm      | 15 mm      |
| 30 mm                               | 15 mm     | 25 mm      |
| 34 mm                               | -         | 35 mm      |

### Sensitivity Adjustment

Most capacitive proximity sensors are equipped with sensitivity adjustment potentiometers. In inductive sensors, the coil size is the decisive factor. Since the sensor measures a dielectric gap, the sensing range needs to be adjusted in line with the various relevant ambient conditions.

### Target Material and Size

A capacitive sensor should not be hand-held during set up. Because your hand has a dielectric constant greater than air, the sensor may detect your hand rather than the intended target.

Capacitive sensors can detect both ferrous and non-ferrous materials equally well. There is no derating factor to be applied when sensing metal targets. But, other materials do affect the sensing range.

Because they can be used to detect liquid through a nonmetallic material such as glass or plastic, you need to ensure that the sensor detects just the liquid, not the container. The transparency of the container has no effect on the sensing.

For all practical purposes, the target size can be determined in the same

manner as was discussed in "Target Size" on Page page 104 for inductive proximity sensors.

### Environment

Many of the same factors that affect inductive proximity sensors, also affect capacitive sensors, only more so.

- Embeddable mounting—capacitive sensors are generally treated as unscreened devices, and therefore, are not embeddable.
- Deposits / chips: They are more sensitive to metallic and nonmetallic chips and residue.
- Adjacent sensors—more space between devices is required due to the greater, unscreened sensing range
- Target background—because of both the greater sensing range, and its ability to sense metallic and non-metallic materials, greater care in applying these sensors is needed when background conditions are present
- Ambient atmosphere—the amount of humidity in the air may cause a capacitive sensor to operate even when no target is present
- Welding magnetic fields—capacitive sensors are generally not applied in a welding environment
- Radio Frequency Interference (RFI)—in the same way that inductive proximity sensors are affected, RFI interferes with capacitive sensor circuitry



**Light sensors**

Light sensors can be used in a wide variety of applications. They can detect objects more quickly and at longer distances than many competing technologies. This is why light sensors have quickly become one of the most frequently used automatic detection methods in manufacturing.



**Scopes of application**

Some of the common uses for light sensors include:

- **Material handling:** A sensor can ensure that products move along a conveyor belt in an orderly manner. The sensor will stop the operation if a jam occurs. In addition, individual objects can be counted as they move down the flat conductor.
- **Packaging:** Sensors can check whether containers have been filled, labeled, and sealed correctly.

- **Machine operation:** Sensors can monitor a machine's proper operation and ensure that the required materials are present and that tools are in good condition.
- **Paper Industry:** Sensors can detect web flaws, web splice, clear web and paper presence, while maintaining high web speeds.

**Design Flexibility**

Light sensors are available in a wide variety of designs. Sources and detectors can be arranged in a multitude of manners in order to meet the requirements of the application in question.

**Operating modes**


We will briefly introduce you to these modes, and fully explain them later (→ Page 107).

| Operating mode                                      | Description   | Operating mode                                      | Description   |
|---|---|---|---|
| <p><b>Thru-beam photoelectric sensors</b></p>       | <p>A source unit in one location sends a light beam to a detector unit in another location. An object is detected when it passes between the source unit and the detector unit, interrupting the light beam.</p>              | <p><b>Diffuse reflective sensor</b></p>             | <p>The light source and the detector are located in a single housing. If a target object moves in front of the optical sensor, it will directly reflect the beam of light back to the detector.</p>                                       |
| <p><b>Polarized retroreflective arrangement</b></p> | <p>The light source and the detector are located in a single housing. The emitted beam of light is mirrored by the polarizing reflector with a phase offset of 90°. The target object blocks the polarized beam of light.</p> | <p><b>Background suppression (Perfect Prox)</b></p> | <p>This is a special type of diffuse reflective sensor that consists of two detectors. This sensor offers reliable detection of target objects in a defined sensing range and at the same time ignores objects outside of this range.</p> |

**Basic Operation of Light Sensors**

The operation of the light sensor is quite simple. A source light-emitting diode (LED) sends a beam of light, which is picked up by a photodetector.

When an object moves into the path of the light beam, the object is detected. Let's look at how a light sensor works.

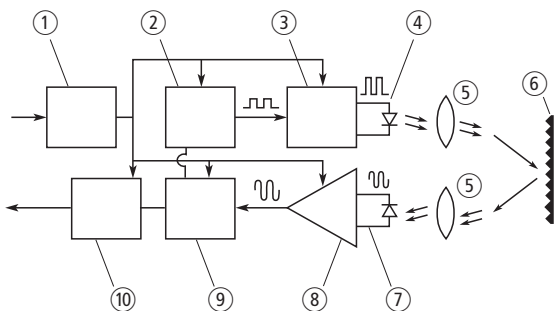

- ① Power supply
- ② Modulator: generates pulses to cycle amplifier and LED at desired frequency.
- ③ Amplifier
- ④ LED
- ⑤ Lens
- ⑥ Target object or reflector
- ⑦ ⑧ Detector: Either a photodiode or a photo-transistor device, selected for a

- maximum sensitivity at the source LED's emitted light wave-length. Both the source LED and the detector have protective lenses.
- When the detector picks up the light, it sends a small amount of current to the detector amplifier.
- ⑧ Detector Amplifier: Blocks current generated by the background light. It also provides amplification of the signal received to a usable level, and

- sends it through to the demodulator.
- ⑨ Demodulator: Sorts out the light thrown out by the detector from all other light in the area. If the demodulator decides the signals it receives are okay, it signals the output.
- ⑩ Output: Performs switching routine when directed to do so by the demodulator.

WWW.TM2A.PT info@tm2a.pt


WWW.TM2A.PT info@tm2a.pt

**The Light Source**

Today's light sensors use a light-emitting diode (LED) to produce their beam of light. Using LEDs offers many significant advantages:

- A LED can be rapidly switched and instantly turned ON and OFF
- .Extremely small
- Consume very little power
- Generate a negligible amount of heat.
- Life exceeds 100,000 hours (11 years) continuous use.


**Light Sensors Styles and Uses**

|   | <b>Design/model series</b>                    | <b>Application</b>  |
|---|---|---|
|    | Tubular<br>Comet series                       | Small, easy to mount body enables mounting within machinery and other tight places. This sensor comes end sensing and right angle view sensor face, depending upon the type of mounting required.   |
|    | Harsh operational<br>conditions<br>E58-Series | Heavy-duty construction makes this sensor ideal for rugged environments.  |
|    | E65-SM-Series                                 | A family of high performance DC light sensors in an economical compact enclosure. Diagnostic LEDs for correct target sensing.   |
|   | Fiber Optics                                  | Made for fast response and for sensing in very tight areas. The cables are made of individual glass or plastic fibers and contain no electronics. Accessories to Comet series   |
|  | Miniature<br>E71 series NanoView              | A complete line of miniature light sensors for optimum placement and protection with no compromise in performance.  |
|  | Long-range sensors<br>E67 series              | The E67 series reliably detects target objects within its sensing range independently of variations in color, reflectance, contrast, and surface shape. Its Perfect Prox technology enables flawless background suppression, which makes these sensors ignore objects that are barely outside the target range. |



**Fiber Optics**

Applying fiber optic technology to light sensors means applications with space restrictions are not a problem. A fiber optic cable can detect objects in locations too jammed for a standard sensor. Fiber optic cable is available in sizes as small as 0.002 inches (0.05 mm) in diameter.



Glass Fiber Optic Cable

- ① Glass fiber embedded in insulated material
- ② Stainless steel sheath

A glass fiber optic cable is made up of a large number of individual glass fibers, sheathed for protection against damage and excess flexing.

Because light—rather than current—travels down these cables, the signal is unaffected by electromagnetic interference (EMI) and vibration.

Fiber optics can withstand high temperatures; standard glass up to 480°F (249°C) and specialized high temperature versions up to 900°F (482°C). Glass fibers can stand up to the harsh wash-down chemicals used in many food, beverage and pharmaceutical applications.

However, glass fibers have their disadvantages. They have a limited sensing distance, so they can be used only in tight areas. The maximum distance when using the thru-beam mode is 380 mm. In addition, these sensors have a relatively small sensing field. Also, small drops of water and dirt smudges can affect glass fibers applications.

**Modes of Detection**


In most applications, light sensors generate an output any time an object is detected.

**Light operated or dark operated**


"Light operated" means that an output signal will be generated if the light sensor receives light.

"Dark operated" means that an output signal will be generated if the light sensor does not receive any light.

• Light operated




Reflected beam of light:  
Activated output signal




Blocked beam of light:  
No output signal

• Dark operated



Reflected beam of light:  
No output signal



Blocked beam of light:  
Output signal activated

- ① Source
- ② Detector
- ③ Reflector

Operating modes

On page 107, we briefly discussed the four basic operating modes used with light sensors. These are:

- Thru-beam photoelectric sensors
- Retroflective sensing sensor (polarized)
- Diffuse reflective sensor
- Background suppression (Perfect Prox)

Thru-beam photoelectric sensor

Source and detector units face one another across an area. The column of light traveling in a straight line between the two lenses is the effective sensing beam. An object crossing the path has to completely block the beam to be detected.


Strengths:

- Long sensing distance (up to 800 ft)
- Highly reliable
- Can "see" through opaque objects.

Weaknesses:


- Two components to mount and wire.
- Alignment could be difficult with a longer distance detection zone.

Function:



Normal state

- ① Station
- ② Field of view
- ③ Detectors
- ④ Effective light beam



Target detected

- ① Station
- ② Detectors
- ③ Object blocks beam of light.

Retroflective sensing sensor, polarized

The source and detector are placed on the same side of the object to be detected, parallel to each other. A reflector is on the other side. This reflector sends the emitted light back to the detector.

When a target object passes between the source/detector unit and the reflector, the beam is no longer reflected, and the target is sensed. The target has to block the entire beam.

In certain cases, target objects with a shiny surface can result in false positives by activating the retroflective sensing sensor. A polarized retroflective sensing sensor can be used to prevent this. The polarizing filter on the sensor will ensure that the sensor will only detect light that has been offset by the reflector with a phase offset of 90°.


Strengths:

- Medium range sensing distance.
- Low cost.
- Ease of installation.
- Alignment does not need to be exact.
- A polarizing filter can be used to ensure that shiny surfaces will be reliably detected.

Weaknesses:


- Reflector must be mounted.
- Problems detecting clear objects.
- Dirt on reflector can hamper operation.
- Not suitable for detecting small objects.

Function:



Normal state

- ① Source/detector
- ② Target
- ③ Retro-reflector



"Target object detected" state

- ① Source/detector
- ② Target object preventing reflection; i.e., target object detected.
- ③ Retro-reflector

Diffuse reflective sensor

The source and detector are positioned on the same side of the target. The two components are aligned so that their fields of view cross. When the target moves into the area, light from the source is reflected back to the detector.


Strengths:

- Application flexibility.
- Low cost.
- Easy installation.
- Easy alignment.
- Many varieties available for many application types.

Weaknesses:


- Short sensing distance (under 10 ft).
- Sensing distance depends on target size, surface and shape.

Function:



Normal state

- ① Source/detector
- ② Target



Target object detected

- ① Source/detector
- ② Target object reflecting beam of light; i.e., target object detected.


Background suppression (Perfect Prox)

This detection mode is a special type of diffuse reflective sensor. It combines extremely high sensing performance with a sharp optical cut-off. This enables the sensor to reliably detect target objects independently of their color, degree of reflection, contrast, and surface texture and ignore objects that are immediately outside the target range.

This method uses two different photo-detectors. For the Perfect Prox unit with a six-inch (150 mm) range, the near detector has a range of 0 to 24 inches (0 to 610 mm). The far detector has a range of 6 to 24 inches (150 to 610 mm).

Objects closer than six inches are detected only by the near sensor. Objects between 6 and 24 inches are detected by both detectors.

If the near-detector signal is stronger than the far-detector signal, the sensor output will be ON. If the far-detector signal is stronger than or equal to the near-detector signal, the sensor output will be OFF. The result is a sensor with a high light intensity difference over 150 mm combined with a sharp cut-off.



Perfect Prox Sensor

- ① Sensor
- ② Near sensing range
- ③ Far sensing range
- ④ Cut-off distance

Excess gain

**Definition**

The term "excess gain" is used to indicate a light sensor's excess light, i.e., the light that goes beyond the quantity of light required to detect an object.

A excess gain of "1" for a specific range means that the quantity of light available is exactly enough to detect an object within the range in perfect conditions. In other words, the range at which the light intensity difference is "1" equals the sensor's maximum range.

Every sensor model comes with a excess gain diagram that can be used to determine the excess gain for the sensing distance used in a specific application.

However, we have to take into consideration the following real-world variables:

- Target size
- Target color
- Target surface texture
- Ability to block the beam of light
- Background
- Application environment

In the real world, there is contamination—dust, humidity and debris—that can settle on the lenses and reduce light transmission. Furthermore, each individual target may vary slightly from the next in color, reflectivity or distance from the sensor.


If you use a sensor with a excess gain of exactly "1," it is highly likely that the target object will not be detected reliably. To be on the safe side, you will need a sensor with the largest possible excess gain at the range you will be using. This ensures the sensor will continue to operate reliably when you need it. If the degree of soiling or pollution increases, you will need a larger excess gain in order to compensate for the decrease in "visibility."

**Thru-beam photoelectric sensor**

The excess gain for this type of sensor is the easiest to measure. The excess gain is almost exclusively a function of the distance between the source and detector.

When implementing the excess gain for an application, start with the excess gain chart for the thru-beam sensor. Then consider:

- Misalignment of the two units.
- Dirt in the environment reduces gain.




Typical Gain Curve for a Thru-Beam

If these sensors are spaced 30 ft (9 m) apart, the excess gain at that distance would be an excess gain of "10".


**Diffuse reflective sensor**

Almost every diffuse reflective sensor has a uniquely specific combination of lenses and beam angles. Accordingly, almost every sensor will have its own specific excess gain curve.


Diffuse reflection ranges:



Perfect Prox long range sensor, example



Short Range




Diffuse reflective sensor

- ⑧ Comet 13102A typical
- ⑨ Comet 13102A minimum


Sensing range referenced to 90% reflective white target.

The excess gain of a short-range sensor is large within the focused range and then decreases quickly. The source's beam of light and the detector's field of view converge a short distance behind the lenses. The energy present in that area is very high, allowing the detection of small targets. The sensor will ignore objects in the near background.



Short Range

In the case of a long-range sensor, the source's beam of light and the detector's field of view will be close to each other on the same shaft. The sensor's detection capabilities will extend across a larger distance. The excess gain will peak a few centimeters away from the sensor and then decrease slowly as the distance increases.



Long range


To sense into holes or cavities, or to pick up very small objects, use a focused diffuse reflective sensor. Or, a sensor with a very small light spot size. The source and detector are positioned behind the lens in order to focus the energy to a point. The excess gain is extremely high at this point and then drops off on either side of the sensing zone.

**Retroflective sensing sensor**

Calculating the excess gain for a retroflective sensing sensor is done with a method similar to that used for diffuse reflective sensors.

With this type of sensor, excess gain and range are related to the light bouncing back from the reflector. Maximum operating range also depends upon lens geometry and detector amplifier gain.

The effective beam is defined as the actual size of the reflector surface. The target must be larger than the reflector before the sensor will recognize the target and switch its output.



Effective Reflex Sensor Beam


- ① Emitted light beam
- ② Effective light beam
- ③ The detector's field of view
- ④ Retro-reflector

**Retroreflector / Corner cube retroreflector**

The range and excess gain of a retro-reflector will depend on the reflector's quality.

Retroreflectors deliver the highest signal return to the sensor. A corner reflector has 2,000- to 3,000 times the reflectivity of white paper.


A retroreflector is made up of three adjacent faces that are arranged at right angles to each other (hollow corner retroreflector).



Retro-reflector

- ① Light beam

When a ray of light strikes one of the three adjoining sides, the ray is reflected to the second side, then to the third, and then back to its source in a direction parallel to its original course. Thousands of these prisms are molded into a rugged plastic reflector or vinyl tape material.



Glass Bead

- ① Light beam
- ② Opaque material

There are reflectors made up of glass beads placed on flat conductors that are intended for use in dispensers for package coding on conveyors. These reflectors are also available in sheets, and can be cut to size as necessary. The bead surface is typically rated at 200 to 900 times the reflectivity of white paper.

Only retroreflectors can be used with polarized retroreflective sensing sensors. The light reflected by the prisms in the corner cube retroreflector will have a phase offset of 90°. The polarizing filters on the source and detector will only let the light reflected by the retroreflector through. Glass bead reflectors cannot be used with polarized retroreflective sensing sensor.

**Contrast**

Contrast measures the ability of a light sensor to detect an object. A sensor's contrast is the ratio of the excess gain in lighted conditions to the excess gain in dark conditions. A ratio of 10:1 is desired. Contrast is important when a sensor has to detect semi-transparent objects or extremely small objects.

Each operating mode handles contrast differently.

- Thru-beam photoelectric sensor and retroreflective sensing sensor  
These operating modes are affected by:
  - Light permeability of an object or surface
  - Size of an object in relation to the beam size

- Diffuse reflective sensor  
This operating mode is affected by:
    - Distance of the object or surface from the sensor
    - Color or material of the object or surface
    - Size of the object or surface
- The ideal application provides infinite contrast ratio of the detection event. This is the case when 100% of the light beam is blocked in the retroreflective or thru-beam operating mode. For diffuse sensing, this occurs when nothing is present. Taking the contrast ratio into account is important when the above situation is not the case (e.g., when detecting semitransparent objects). In certain cases, it may be necessary to use special low-contrast sensors designed for the specific application in question (e.g., featuring

a detector for transparent objects).

**Environment**

The list below ranks the level of pollution in a range of typical application environments.

The excess gain required in order to overcome atmospheric pollution will be larger the further down the list you go.

In addition, the light source and the reflector used in retroreflective sensing sensors and thru-beam photoelectric sensors may be located at different spots with different degrees of pollution.

For outdoor use, the environment can range from lightly dirty to extremely dirty.

**Level of Contamination Ranking**


| Ranking          | Description  | Minimum required excess gain |
|------------------|--|------------------------------|
| Relatively clean | No dirt buildup on lenses or reflectors  | 1.5 x                        |
| Slightly dirty   | Slight buildup of dust, dirt, oil, moisture, and so on, on lenses or reflectors. Lenses should be cleaned on a regular schedule. | 5 x                          |
| Moderately dirty | Obvious contamination of lenses or reflectors. Lenses are cleared occasionally or when necessary.                                | 10 x                         |
| Very dirty       | Heavy contamination of lenses. Heavy fog, mist, dust, smoke or oil film. Minimal cleaning of lenses takes place.                 | 50 x                         |

**Sensor Output Circuits**

Sensors interface to other control circuits through the output circuit. The control voltage type is a determining factor when considering output type. Control voltage types, whether AC, DC or AC/DC, can be categorized as either load-powered sensor or line-powered sensor.

**Load-Powered—Two-Wire Sensors**

Load-powered devices are similar to limit switches. They are connected in series with the controlled load. These devices have two connection points to the circuit and are often referred to as two-wire switches. The operating current is drawn through the load.



Load powered/two-Wire switch


When the switch is not operated, it must draw a minimum operating current referred to as off-state leakage current. Off-state leakage current is also sometimes referred to as residual current. This current is used to keep the sensor electronics active while it "looks" for a target. Residual current is not a problem for loads such as relays, motor starters, and so on (with low impedance). However, loads such as inputs of programmable logic controllers with high impedance require a leakage current of lower than 2 mA.

Currents larger than this may result in input devices such as PLCs (programmable logic control) interpreting the residual current as an ON signal. Most sensors require a residual current of 1.7 mA. If a particular PLC requires less than 1.7 mA, a load resistor can be connected in parallel to the input for the PLC load. The resistor lowers the current seen by the PLC so it doesn't false trigger.

The current needed to sustain the sensor when a target object is present is called minimum load or holding current. Depending on the specific sensor specifications, this current will be about 5 mA. The sensor will not work if the current drawn by the load is not large enough. Sensors with a 5 mA or less minimum holding current can be used with PLCs without concern.

**Line-Powered—Three-Wire Sensors**

Line-powered sensors derive their power from the line and not through the load. They have three connection points to the circuit, and are often referred to as three-wire switches.



Line-powered/three-wire switches

The operating current the sensor pulls from the line is 20 mA.

**Two-Wire Sensors**

Although most sensors are three-wire devices, two-wire devices are also required sometimes. They are designed to be easy replacements for limit switches without the need to change wiring and logic.

Since two-wire sensors take their operating power from the load circuit, there is a voltage drop (approx. 7-9 V in AC-powered devices) across the switch when it is on.


If multiple two-wire switches are connected in series with the load, the voltage drop across the switches will increase. If multiple two-wire sensors are connected in parallel, the leakage current will increase. This needs to be taken into account when it comes to activating PLC inputs, for example.

Applications

Broken Tool Detection

| Description             | Catalog Number             |
|-------------------------|----------------------------|
| E58 Perfect Prox Sensor | E58-30DP...<br>E58-18DP... |


This sensor is used to sense for the presence of the bit on a mill. The high sensing power and background suppression of the Perfect Prox allows reliable detection through high levels of cutting fluids, while ignoring objects just beyond the bit. The rugged harsh duty sensor survives constant exposure to lubricants, cutting fluids and flying metal chips.



Broken Tool Detection

| Description              | Catalog Number  |
|--------------------------|-----------------|
| Tubular inductive sensor | E57... or iProx |


A tubular sensor is used to detect the presence of a drill bit — should the drill bit be broken the sensor would signal a controller.



Machining process

| Description              | Catalog Number  |
|--------------------------|-----------------|
| Tubular inductive sensor | E57... or iProx |


A ferrous only sensor is used in a process where aluminum is being machined. The ferrous only sensor ignores the aluminum (non-ferrous) chips from the machining process and only detects the ferrous target.



Tool Position

| Description              | Catalog Number  |
|--------------------------|-----------------|
| Tubular inductive sensor | E57... or iProx |

A tubular sensor is used to detect the position of a tool chuck.



info@tm2a.pt

WWW.TM2A.PT


info@tm2a.pt

WWW.TM2A.PT

Bottle Filling Detection

| Description         | Catalog Number     |
|---------------------|--------------------|
| Clear object sensor | E71-CON or E71-COP |


A clear object sensor is used to sense the presence of bottles at a filling operation. The sensor offers high reliability in sensing clear bottles of different colors and thicknesses.



Process control engineering

| Description               | Catalog Number |
|---------------------------|----------------|
| Tubular capacitive Sensor | E53...         |


A capacitive sensor used to verify fill level of bottled water on a filling process line.



Conveyor System Control

| Description              | Catalog Number  |
|--------------------------|-----------------|
| Tubular inductive sensor | E57... or iProx |


A tubular inductive sensor is used to detect the presence of metal carriers holding parts to be machined.



Stack Height Control

| Description                                 | Catalog Number |
|---|----------------|
| Comet series thru-beam photoelectric sensor |                |
| Station                                     | 11100A         |
| Detectors                                   | 12100A         |


A set of thru-beam photoelectric sensors determines the height of a scissor lift. For example, when the control is set for "dark-to-light" energize, the lift rises after a layer has been removed and stops when the next layer breaks the beam again.



Carton Fill-Level Detection

| Description  | Catalog Number |
|--|----------------|
| Comet visible retro-reflective sensing sensor                              | 14102A...      |
| Comet diffuse reflective sensor with background suppression (Perfect Prox) | 13103A...      |
| Retro-reflector  | 6200A-6501     |


Two sensors work together to inspect the fill level in cartons on a conveyor. A diffuse reflective sensor senses the position of the carton and energizes the sensors located over the contents. If the sensor does not "see" the fill level, the carton does not pass inspection.



Lid Detection

| Description              | Catalog Number  |
|--------------------------|-----------------|
| Tubular inductive sensor | E57... or iProx |


Two sensors are used to detect a can on a conveyor belt and to check whether it has a cover.



Tollbooth Control

| Description                    | Catalog Number |
|--------------------------------|----------------|
| Perfect Prox long range sensor | E67-LRDP...    |


The long range polarized retroreflective sensing sensors are used for the time control of a toll barrier. As soon as the car that has paid passes, the barrier closes in order to ensure that the next car stops. With the initiator E67 Long Range Perfect Prox you can mount the sensor on just one side instead of both. Plus with Perfect Prox, the E67 will detect cars with different colors and finishes while ignoring all other background objects. The rugged design makes it also suitable for continuous operation in extreme weather conditions.



Liquid Level Detection

| Description               | Catalog Number |
|---------------------------|----------------|
| Tubular capacitive Sensor | E53...         |

A pair of capacitive sensors are used to sense high and low liquid levels in a tank through a sight glass. This arrangement starts a pump to fill the tank when the lower sensor is energized and shuts the pump off when the top sensor is energized.



info@tm2a.pt

WWW.TM2A.PT


info@tm2a.pt

WWW.TM2A.PT

Bulk Material Detection

| Description               | Catalog Number |
|---------------------------|----------------|
| Tubular capacitive Sensor | E53...         |

A capacitive sensor is used to control fill level of solids such as plastic pellets in a hopper or bin.



Parts Presence

| Description                    | Catalog Number |
|--------------------------------|----------------|
| Limit switch, inductive sensor | E57...         |
| Comet Perfect Prox             | 1310...        |
| Inductive sensor iProx         | E59-M...       |


A sensor configured as a limit switch can be used to detect whether a component is present in an automatic assembly machine. The Comet detects all materials, colors and services and masks out the background. The iProx can be programmed to detect a particular material and thus to ignore all other materials.



Parts Presence

| Description  | Catalog Number |
|--|----------------|
| Comet diffuse reflective sensor (Perfect Prox), 100 mm | 13101A...      |


The sensor detects components with different heights from approx. 13 to 76 mm in a channel. Installation is simple and does not require any drilling or cutting of the channel.



Filter Paper Length Control

| Description                               | Catalog Number |
|---|----------------|
| A focused Comet diffuse reflective sensor | 13102A...      |

A focused diffuse reflective sensor interfaces with a programmable controller to measure a specific length of corrugated automotive filter paper. The controller detects the presence or absence of a corrugation. When a predetermined number of corrugations has been detected, the programmable controller directs a shear to cut the paper.





Speed monitoring

| Description              | Catalog Number  |
|--------------------------|-----------------|
| Tubular inductive sensor | E57... or iProx |


A tubular sensor is used to detect the presence of set screws on a shaft hub providing a control device with signals for speed regulation or detection of rotation.



Motion Control

| Description              | Catalog Number  |
|--------------------------|-----------------|
| Tubular inductive sensor | E57... or iProx |


A pair of tubular sensors is used to determine full open and fully closed valve position.



Paper detection

| Description                                    | Catalog Number |
|--|----------------|
| Comet Perfect Prox, 50 mm series, right angled | 13104R...      |

Right angle viewing and compact size allow the sensor to be mounted in the tight confines of paper handling systems. High resolution and sharp optical cut-off ensure that background machinery will be ignored while paper will be detected regardless of color and texture.



Clear Plastic Web Break Detection


| Description   | Catalog Number |
|---|----------------|
| Comet series 150 mm focus diffuse reflective sensor | 13107A...      |

The clear web is detected by an extremely sensitive diffuse reflective sensor. Its short detection range makes it immune to reflective objects in the background. The extremely high excess gain helps it ignore reflection caused by fluttering of the web.

Damage Warning

| Description                                     | Catalog Number |
|---|----------------|
| Comet E58 series thru-beam photoelectric sensor |                |
| Station   | E58-30TS...    |
| Detectors                                       | E58-30TD...    |

Source and detector are mounted at opposite ends of a long warehouse storage shelf with the beam situated a safe distance below overhead obstacles (lighting, cable ducts, gas lines, etc.). If a forklift operator interrupts the beam while moving a load, a siren or flashing light will warn him to stop before any damage occurs.

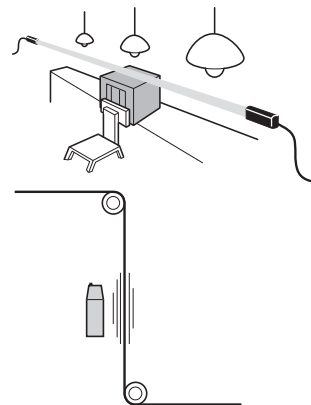



# Worldwide export of machines and plants

European machine and system building and worldwide exports are closely related. Even if you don't export your machines at present, you should be prepared for it in the future. Eaton provides switchgear and protective devices with all the essential approvals and certificates for machine and system building. In most countries around the world, conformity with international standards is the sole requirement for successful exports. This is because components in these locations are governed by compliance with well known and established IEC standards. In this respect, the European CE mark is not only the passport for exports within Europe but also far beyond its borders.



## World market equipment for machine building

Nearly all the switchgear and protective devices of Eaton's Moeller® series are world market devices. Each product line thus carries all the approvals and certification marks required for worldwide use.

These product lines include those for

- Pilot devices, limit switches
- Contactors and various timing and special relays
- Motor-protective circuit-breakers and relays
- Electronic components and systems.

With circuit-breakers and switch-disconnectors, Eaton offers IEC devices for use in most countries in the world and NA devices with virtually the same dimensions and the same accessories for the North American market. This considerably simplifies device selection since the North American standards often involve the need for considerably different technical specifications.



# Electrical engineering products and their applications are not harmonized internationally.




The greatest differences to the IEC world are in North America, i.e. the USA and Canada. For many newcomers to the export business, it is initially surprising to experience the very different approaches and solutions.

Special components, such as handles for main switches that can only be operated by the intentional switching of an

additional handle when the control panel door is opened, may sometimes be required for export to North America. Likewise, the European motor-protective circuit-breaker is only accepted with an upstream protective device or with larger air and creepage distances at the incoming terminals. Eaton is the competent partner of choice for export-related issues here.

## Qualified information is a critical key to success

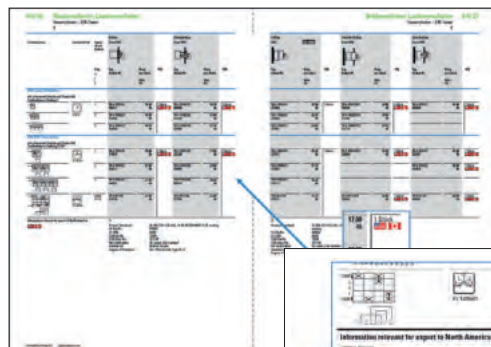

The Eaton Main Catalogue for Moeller® series products provides reliable information for machine and panel builders on the approval of components deployed for North American market. Each selection page provides information such as the relevant product standard, the E-File Number, the Category Control Number or the CSA Class Number. Many customers incorporate this information in their parts lists in order to be well prepared for the acceptance procedures.



**Information relevant for export to North America**

|  |   |
|--|---|
| Product Standards                        | UL 508; CSA-C22.2 No. 14-05; IEC/EN 60947-3; CE marking |
| UL File No.                              | E36332  |
| UL CGN                                   | NLRV  |
| CSA File No.                             | 12526   |
| CSA Class No.                            | 3211-05   |
| UL Listed, CSA certified Branch circuits | UL Listed, CSA certified                                |
| IEC: IP65; UL/CSA Type 3R, 12            | IEC: IP65; UL/CSA Type 3R, 12                           |


Up to 13 data items are listed here for each product, such as the suitability for use in feeders or branch circuits, the maximum operating voltage, or the North American degree of protection, such as UL / CSA Type 4X. The Main Catalogue also contains a glossary with explanations of the American terms.

The link <http://www.moeller.net/eaton-approbationen/en/index.jsp> shows the relevant approvals or permits for each component type. This therefore enables you to view the certificates provided or, depending on the test authority, also the product report. The information given is the same as what is provided in the databases of the authorities.

Anyone wishing to avoid unfortunate experiences, should make use beforehand of the large number of publications that Eaton is offering on the issue of exports to North America. They contain the implementation of the codes & standards and a description of different practices.

These technical articles can be accessed via <http://www.moeller.net/en/company/news/publications/index.jsp> They can be downloaded or ordered free of charge.



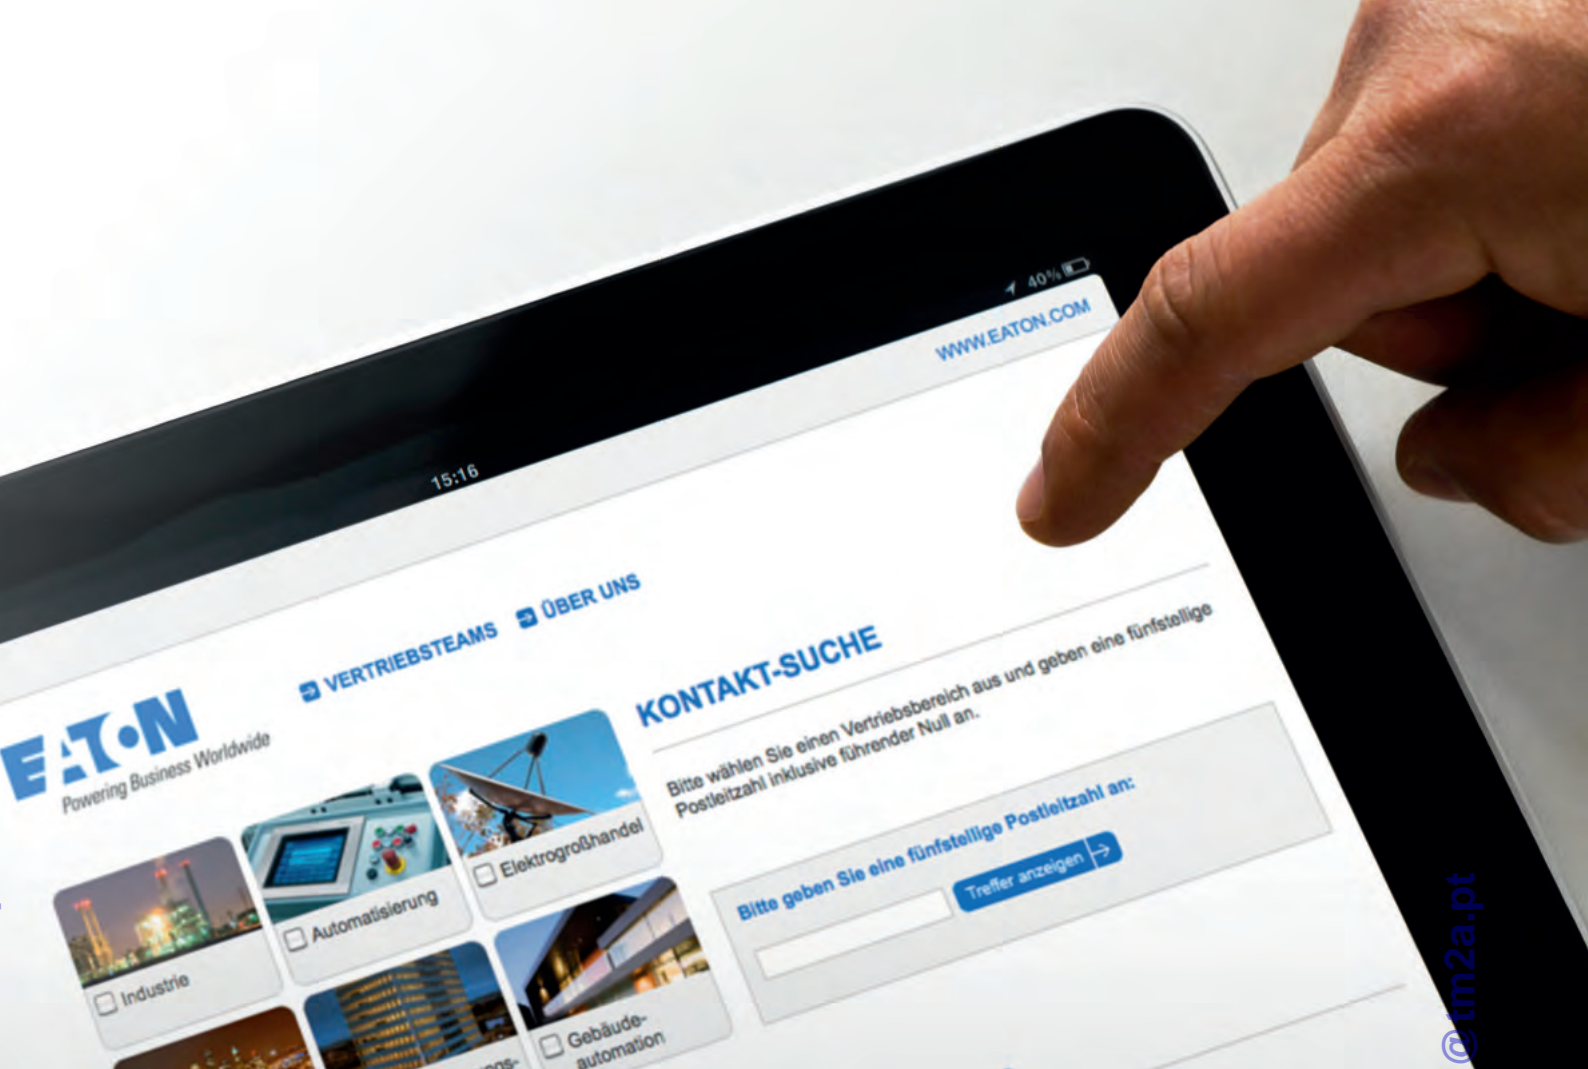

## How to find the right contact:

At Eaton, an efficient customer relationship management is standard practice.

This guarantees you our support right from the start of any new project. Use these contact addresses to find your personal customer contact:

In just a few steps we can direct you to specialist local support specifically for your business sector.

Your customer contact in your region:

→ <http://salesbonn.moeller.net>

Your customer contact worldwide:

→ [www.eaton.eu/electrical/contact](http://www.eaton.eu/electrical/contact)

# Service and consulting for UPS systems and hydraulic solutions.

Further developing relations with our customers is particularly important to us. Your requirements and suggestions will be passed on promptly to the relevant specialists. After all, we take up the challenges you give us as if they were our own.

## Are your questions about uninterruptible power supplies (UPSs)?

### Technical support

If you have any questions about our products and for technical advice send an email to our support team:

supportgermany@eaton.com

or contact our telephone hotline at

Tel.: +49 (0)7841 604 - 334

### Service

If you have a problem or a fault on one of our products contact us by email:

servicegermany@eaton.com

or contact us by phone at:

Tel.: +49 (0)7841 604 - 334

We can be contacted here between Monday – Thursday from 08.00 – 17.00 CET and Friday from 08.00 – 16.00 CET.



## Are your questions about hydraulic solutions?

Please contact the help desk of our Customer Service in Baden-Baden. This service will put you in touch with a customer contact in your locality.

### Our customer service:

Eaton Hydraulics Group

Dr.-Reckeweg-Straße 1

D-76532 Baden-Baden

Tel.: +49 (0)7221 682 - 0

Fax: +49 (0)7221 682 - 788

Email: customersupportemea@eaton.com

## Eaton's After Sales Service

This is the new name of Moeller's tried and trusted Field Service. Only the name has changed. The reliable and first-class service has stayed the same. Further information and general terms and conditions can be found at [www.moeller.net/en/support/fieldservice/index.jsp](http://www.moeller.net/en/support/fieldservice/index.jsp).

### Service specialists

Use our service personnel. Extensive know-how, combined with many years of experience and state-of-the-art equipment to help you find a solution for your tasks.

### Material

Components, assemblies and spare parts for the Eaton product range are available for your applications.

### Service products

Eaton's After Sales Service offers the right service packages for your products.

### Hotline

Free hotline for round-the-clock support.

+49 (0)180 522 3822 (24/7)

0.12 euros per minute for calls from within the German Telecom network

### Onsite service

Repair and replacement service for Eaton devices.

### Repairs

Onsite service, analysis, conversions, expansions and maintenance.

### Online services

Downloads, FAQs and interactive troubleshooting

Eaton is dedicated to ensuring that reliable, efficient and safe power is available when it's needed most. With unparalleled knowledge of electrical power management across industries, experts at Eaton deliver customized, integrated solutions to solve our customers' most critical challenges.

Our focus is on delivering the right solution for the application. But, decision makers demand more than just innovative products. They turn to Eaton for an unwavering commitment to personal support that makes customer success a top priority. For more information, **visit [www.eaton.eu](http://www.eaton.eu)**.

**To contact an Eaton salesperson or local distributor/agent, please visit [www.eaton.eu/electrical/customersupport](http://www.eaton.eu/electrical/customersupport)**



**TM2A Soluções e Componentes Industriais**  
Rua Cidade de Viena 2, Parque Ind. Arneiro  
2660-456 São Julião do Tojal  
PORTUGAL  
T: +351 219737330 F: +351 219737339  
[www.tm2a.pt](http://www.tm2a.pt) [info@tm2a.pt](mailto:info@tm2a.pt)

[WWW.TM2A.PT](http://WWW.TM2A.PT) [info@tm2a.pt](mailto:info@tm2a.pt)

Changes to the products, to the information contained in this document, and to prices are reserved; so are errors and omissions. Only order confirmations and technical documentation by Eaton is binding. Photos and pictures also do not warrant a specific layout or functionality. Their use in whatever form is subject to prior approval by Eaton. The same applies to Trademarks (especially Eaton, Moeller, Cutler-Hammer). The Terms and Conditions of Eaton apply, as referenced on Eaton internet pages and Eaton order confirmations.

**Eaton Industries GmbH**  
Hein-Moeller-Str. 7-11  
D-53115 Bonn/Germany

© 2013 by Eaton Corporation  
All rights reserved  
Printed in Germany 04/13  
Publication No.: CA053003EN-INT  
Doku/DHW/ip/mp 04/13  
Article No.: 171796



Eaton is a registered trademark of Eaton Corporation

All other trademarks are property of their respective owners.