


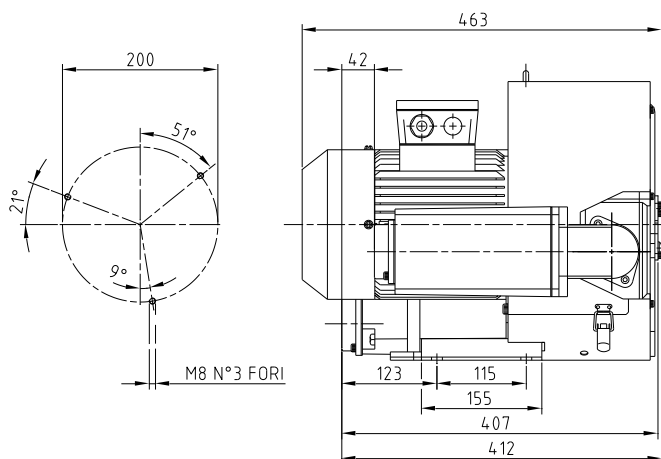


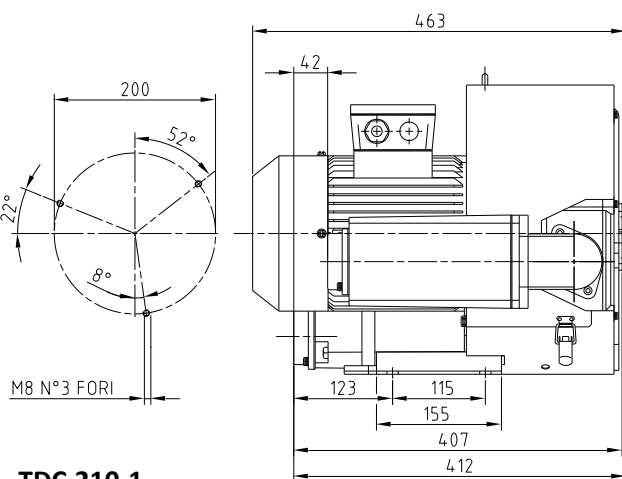

TDC.210

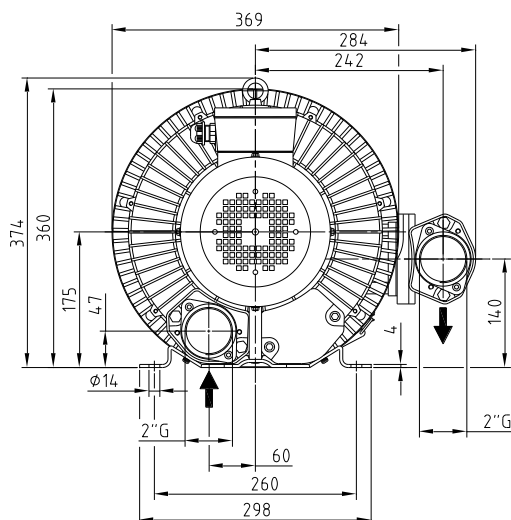


TDC.210-1

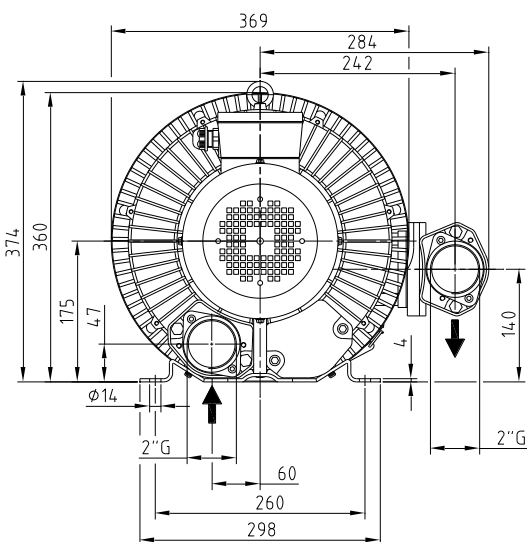


Modello Modelo		TDC.210	TDC.210-1
Codice Código		9403033	9403034
Potenza motore Potência do motor	kW (50Hz)	3,0	4,0
	kW (60Hz)	3,6	4,8
Alimentazione Tensão de alimentação elétrica	V±5% Δ/Y (50Hz)	220-255 / 380-440	
	V±5% Δ/Y (60Hz)	255-277 / 440-480	
Assorbimento Corrente do motor elétrico	A Δ/Y (50Hz)	12,5 / 7,2	14,3 / 8,2
	A Δ/Y (60Hz)	13,5 / 7,8	16,2 / 9,3
Portata Vazão	m³/h (50Hz)	210	210
	m³/h (60Hz)	250	250
Vuoto Vácuo	mbar (50Hz)	-345	-355
	mbar (60Hz)	-400	-410
Sovrappressione Pressão	mbar (50Hz)	+350	+410
	mbar (60Hz)	+350	+500
Rumorosità (UNI EN ISO 2151) (K 3dB) Nível de ruído (UNI EN ISO 2151) (K 3dB)	dB(A) (50Hz)	74	74
	dB(A) (60Hz)	77	77
Peso Peso	kg [N]	43,6 [427,7]	45,2 [443,4]


Vacuum @ 50Hz – 400V

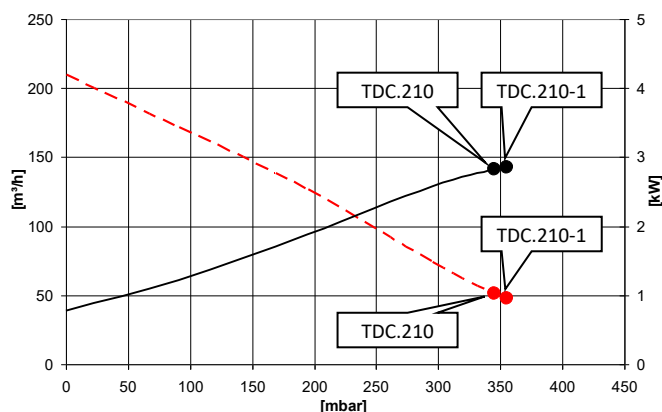


Pressure @ 50Hz – 400V

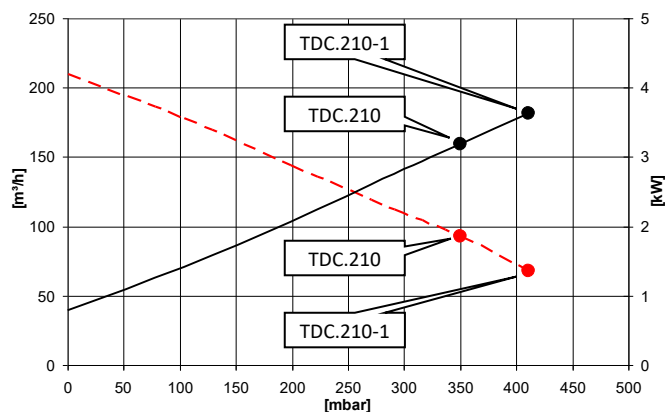

Vacuum @ 60Hz – 460V

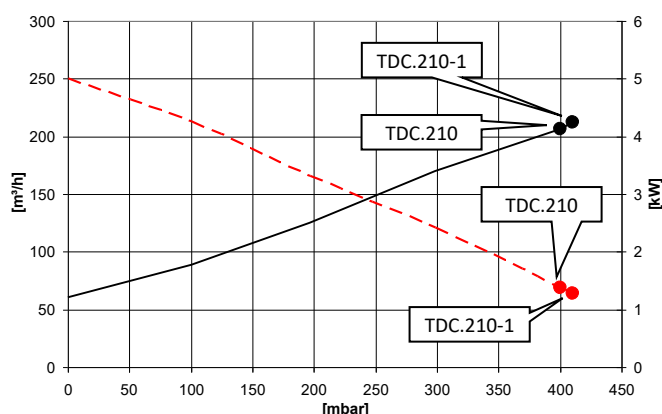

Pressure @ 60Hz – 460V

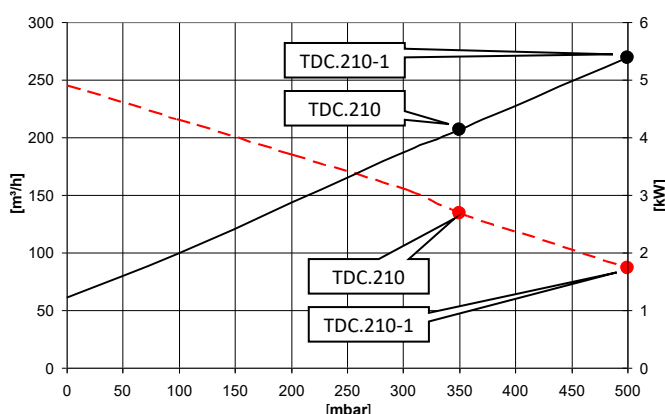


----- Portata / Flow rate


———— Pot. Assorbita / Absorbed Power

Curve riferite alla pressione di 1013mbar (Ass.) e temperatura 20°C (tolleranza ±10%)
Curvas referidas à pressão de 1013mbar (Abs.) e temperatura de 20°C (tolerância ±10%)

50Hz – 400V

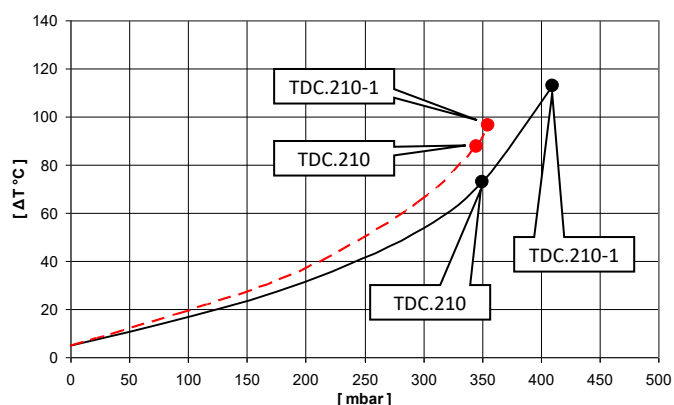

60Hz – 460V

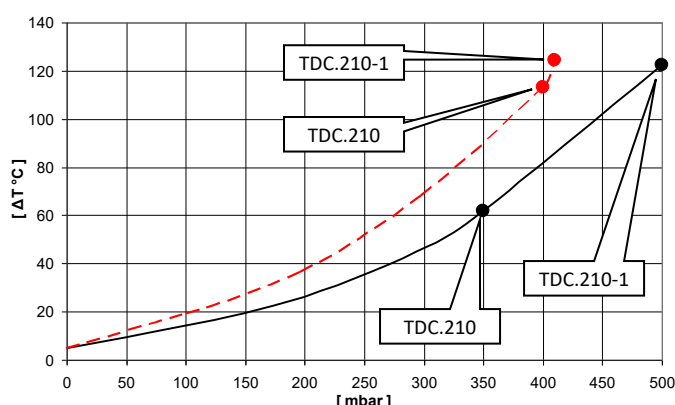

----- Aspirazione / Suction

———— Mandata / Compression

Temperatura ambiente 20°C (tolleranza sulla temperatura ΔT ±5°C)
Temperatura ambiente 20°C (tolerância sobre temperature ΔT ±5°C)