


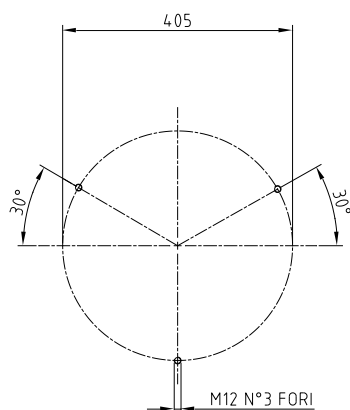
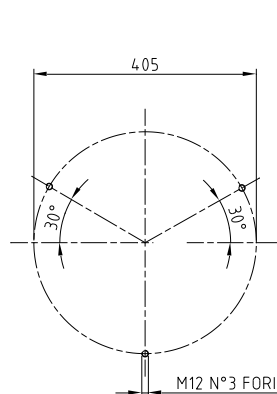
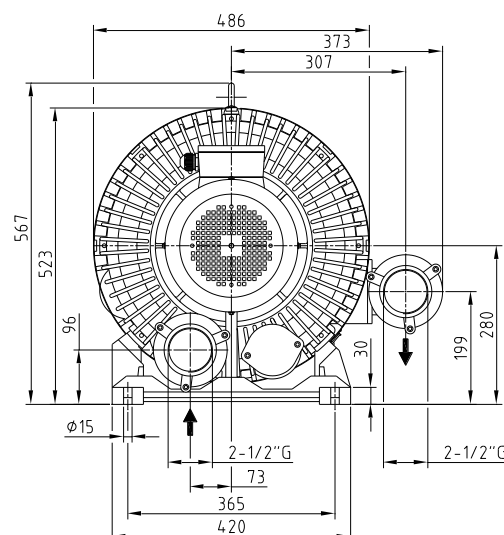


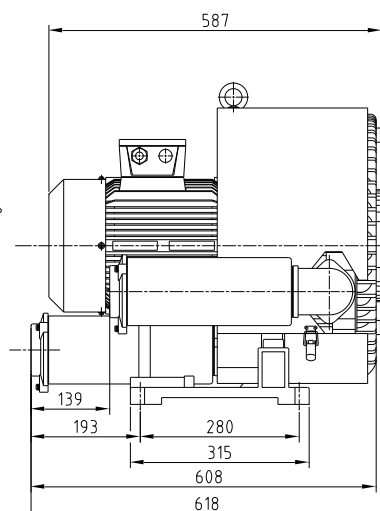

TDC.550

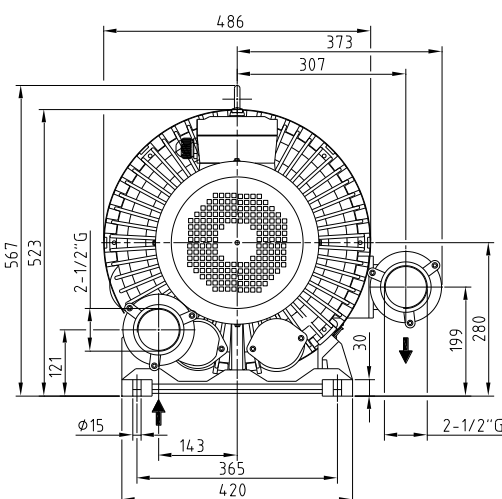


TDC.550-1

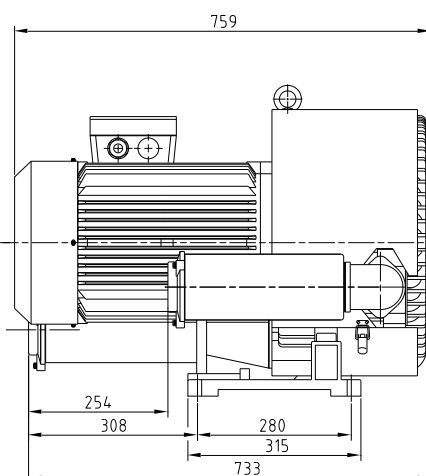


Modello Modelo		TDC.550	TDC.550-1
Codice Código		9403037	9403038
Potenza motore Potência do motor	kW (50Hz) kW (60Hz)	7,5 9,0	11 13
Alimentazione Tensão de alimentação elétrica	V±5% Δ/Y (50Hz) V±5% Δ/Y (60Hz)	380-440 / 660-760 440-480 / 760-830	
Assorbimento Corrente do motor elétrico	A Δ/Y (50Hz) A Δ/Y (60Hz)	15,1 / 8,7 19,1 / 11	25 / 14,4 27,5 / 15,9
Portata Vazão	m³/h (50Hz) m³/h (60Hz)	550 660	550 660
Vuoto Vácuo	mbar (50Hz) mbar (60Hz)	-340 -330	-440 -450
Sovrappressione Pressão	mbar (50Hz) mbar (60Hz)	+310 +310	+600 +600
Rumorosità (UNI EN ISO 2151) (K 3dB) Nível de ruído (UNI EN ISO 2151) (K 3dB)	dB(A) (50Hz) dB(A) (60Hz)	76 81	76 81
Peso Peso	kg [N]	120 [1177,2]	149 [1461,7]


Vacuum @ 50Hz – 400V

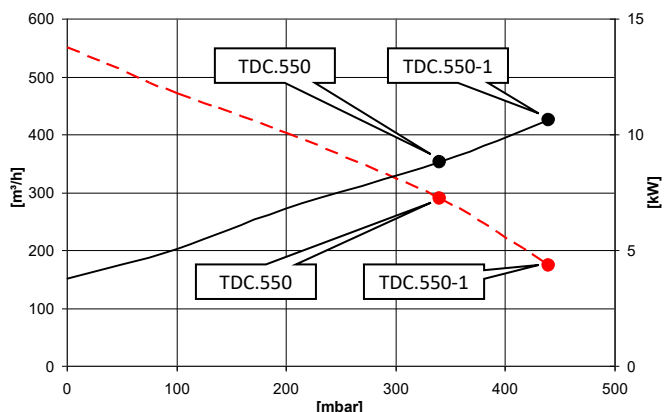


Pressure @ 50Hz – 400V

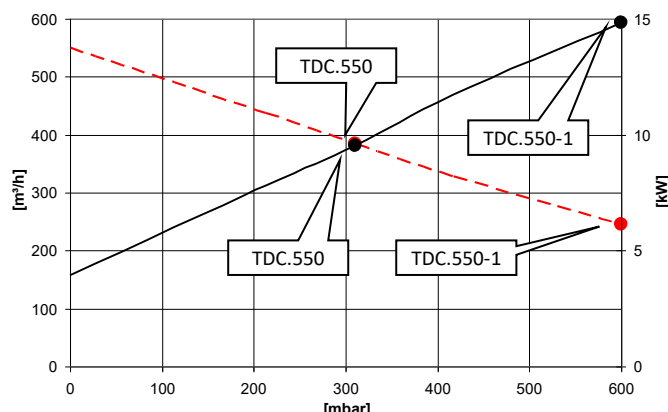

Vacuum @ 60Hz – 460V

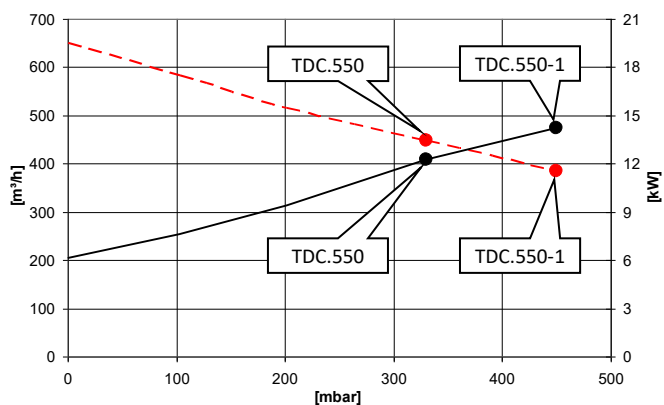

Pressure @ 60Hz – 460V

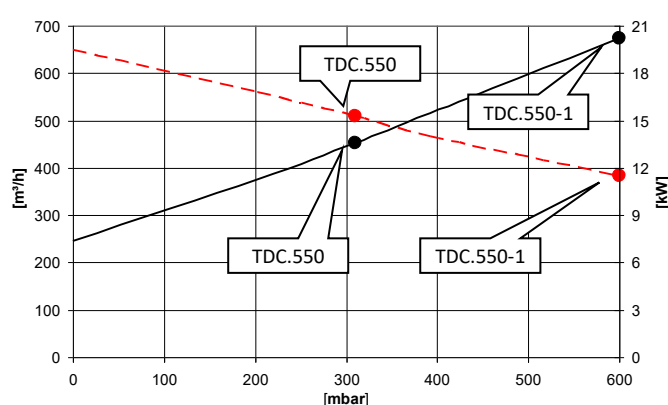


----- Portata / Flow rate


———— Pot. Assorbita / Absorbed Power

Curve riferite alla pressione di 1013mbar (Ass.) e temperatura 20°C (tolleranza $\pm 10\%$)
Curvas referidas à pressão de 1013mbar (Abs.) e temperatura de 20°C (tolerância $\pm 10\%$)

50Hz – 400V

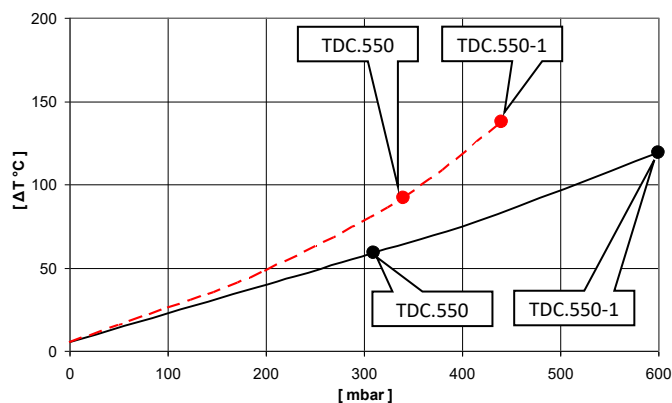

60Hz – 460V

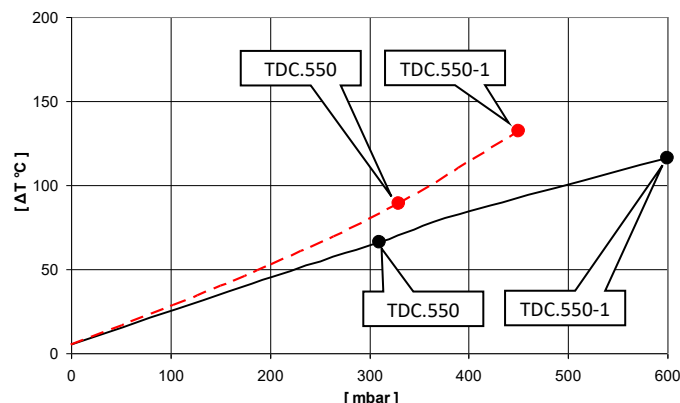

----- Aspirazione / Suction

———— Mandata / Compression

Temperatura ambiente 20°C (tolleranza sulla temperatura $\Delta T \pm 5^\circ\text{C}$)
Temperatura ambiente 20°C (tolerância sobre temperature $\Delta T \pm 5^\circ\text{C}$)