



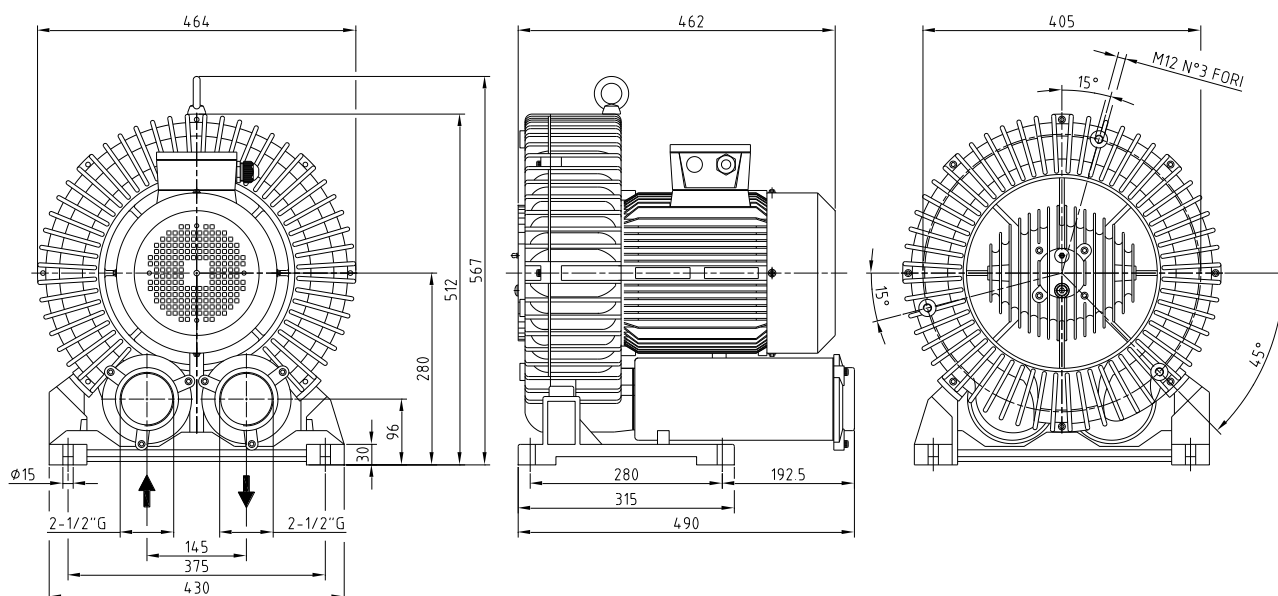


Modello Modelo		TSC.550-0	TSC.550	TSC.550-1
Codice Código		9402061	9402059	9402060
Potenza motore Potência do motor	kW (50Hz) kW (60Hz)	4,0 4,6	5,5 6,5	7,5 9,0
Alimentazione Tensão de alimentação elétrica	V±5% Δ/Y (50Hz) V±5% Δ/Y (60Hz)	220-255 / 380-440 220-277 / 380-480		380-440/660-760 380-480/660-830
Assorbimento Corrente do motor elétrico	A Δ/Y (50Hz) A Δ/Y (60Hz)	17,3 / 10 21 / 12	21 / 12 26,5 / 15,3	15,1 / 8,7 19,1 / 11
Portata Vazão	m³/h (50Hz) m³/h (60Hz)	550 660	550 660	550 660
Vuoto Vácuo	mbar (50Hz) mbar (60Hz)	-200 -180	-270 -280	-300 -310
Sovrappressione Pressão	mbar (50Hz) mbar (60Hz)	+200 +200	+270 +260	+300 +300
Rumorosità (UNI EN ISO 2151) (K 3dB) Nível de ruído (UNI EN ISO 2151) (K 3dB)	dB(A) (50Hz) dB(A) (60Hz)	73 78	74 79	74 79
Peso Peso	kg [N]	83,4 [818,2]	83,4 [818,2]	90 [882,9]


Vacuum @ 50Hz – 400V

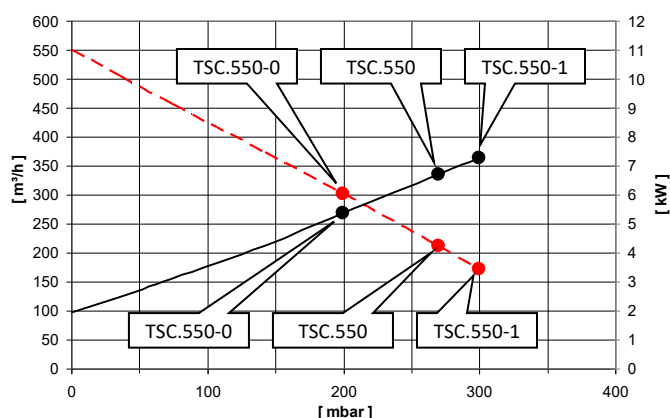


Pressure @ 50Hz – 400V

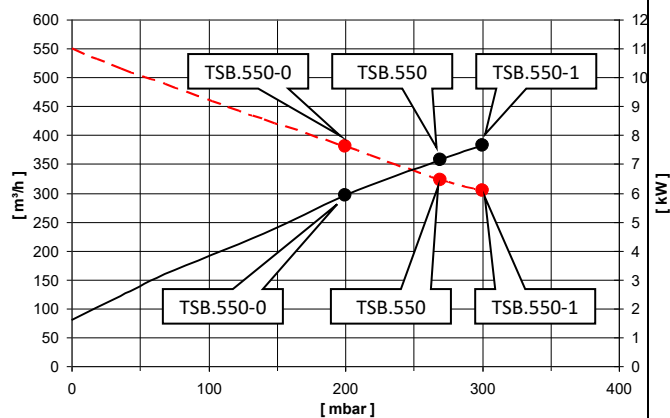

Vacuum @ 60Hz – 460V

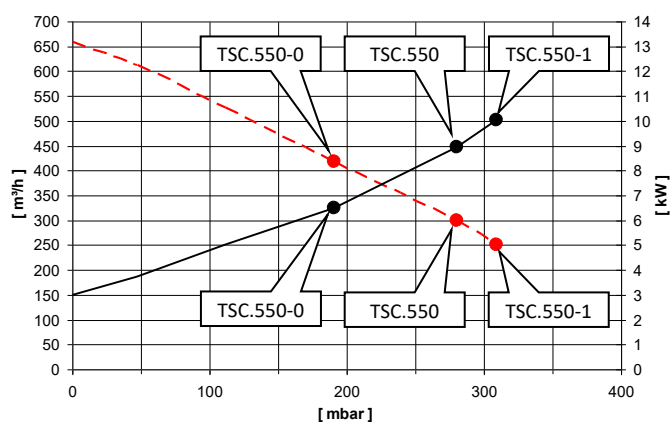

Pressure @ 60Hz – 460V

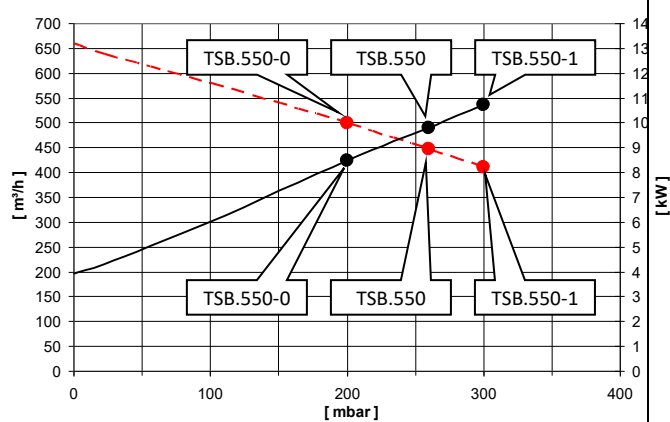


----- Portata / Flow rate


—— Pot. Assorbita / Absorbed Power

Curve riferite alla pressione di 1013mbar (Ass.) e temperatura 20°C (tolleranza ±10%)
Curvas referidas à pressão de 1013mbar (Abs.) e temperatura de 20°C (tolerância ±10%)

50Hz – 400V

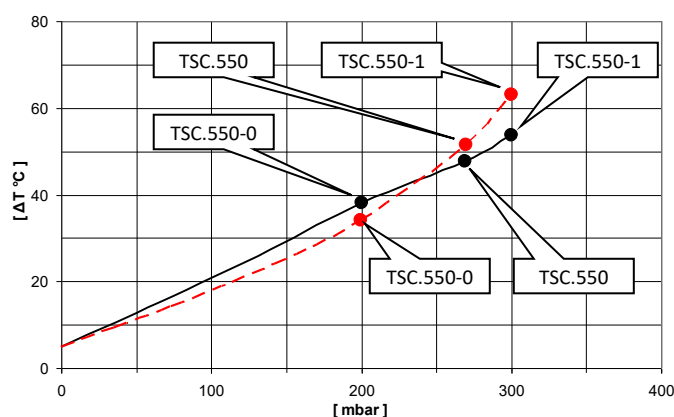

60Hz – 460V

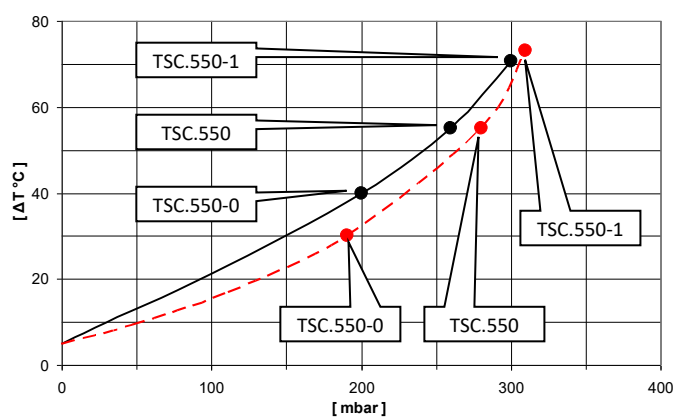

----- Aspirazione / Suction

—— Mandata / Compression

Temperatura ambiente 20°C (tolleranza sulla temperatura ΔT ±5°C)
Temperatura ambiente 20°C (tolerância sobre temperature ΔT ±5°C))