



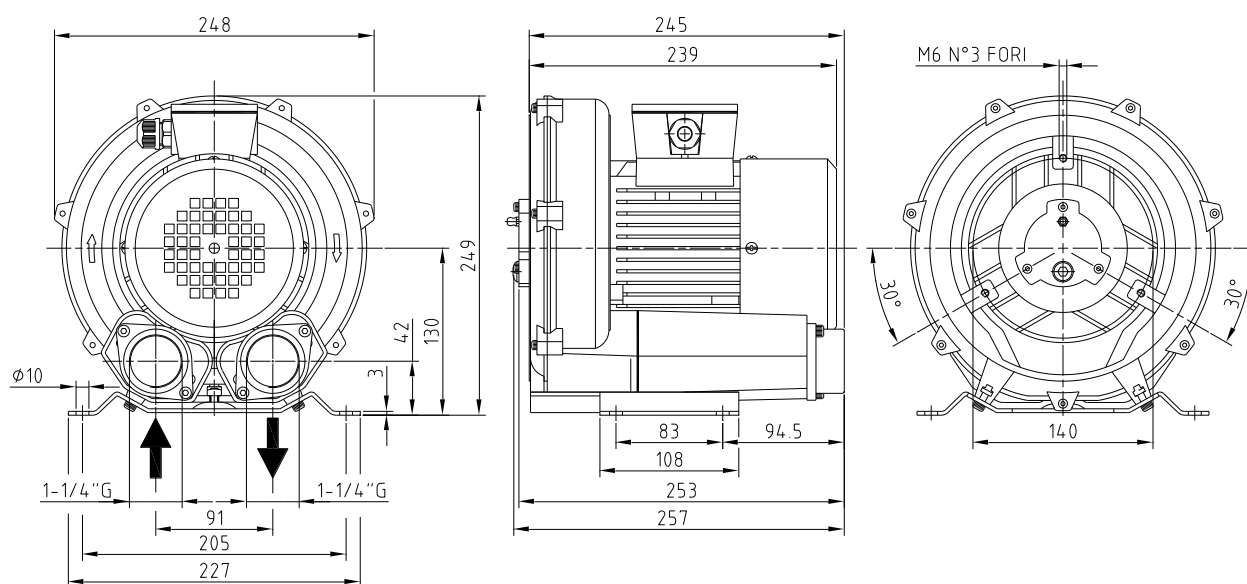


Modello Modelo		TSC.80	TSC.80
Codice Código		9402051	9402066
Potenza motore Potência do motor	kW (50Hz) kW (60Hz)	0,37 0,45	0,37 0,45
Alimentazione Tensão de alimentação elétrica	V±5% Δ/Y (50Hz) V±5% Δ/Y (60Hz)	220-255 / 380-440 220-277 / 380-480	380-440 / 660-760 380-480 / 660-830
Assorbimento Corrente do motor elétrico	A Δ/Y (50Hz) A Δ/Y (60Hz)	2,1 / 1,2 2,3 / 1,3	1,2 / 0,70 1,3 / 0,75
Portata Vazão	m³/h (50Hz) m³/h (60Hz)	90 108	90 108
Vuoto Vácuo	mbar (50Hz) mbar (60Hz)	-110 -140	-110 -140
Sovrappressione Pressão	mbar (50Hz) mbar (60Hz)	+130 +170	+130 +170
Rumorosità (UNI EN ISO 2151) (K 3dB) Nível de ruído (UNI EN ISO 2151) (K 3dB)	dB(A) (50Hz) dB(A) (60Hz)	58 61	58 61
Peso Peso	kg [N]	12 [117,8]	12 [117,8]


Vacuum @ 50Hz – 400V

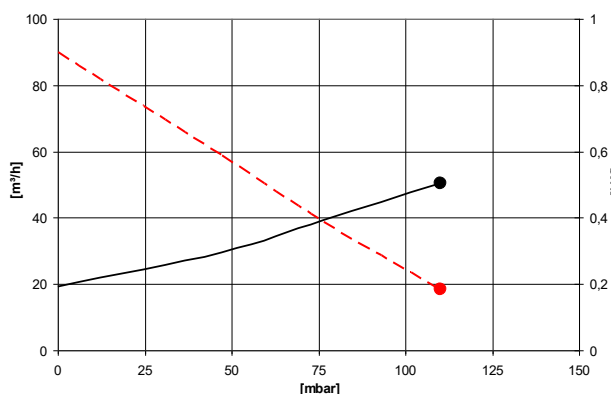


Pressure @ 50Hz – 400V

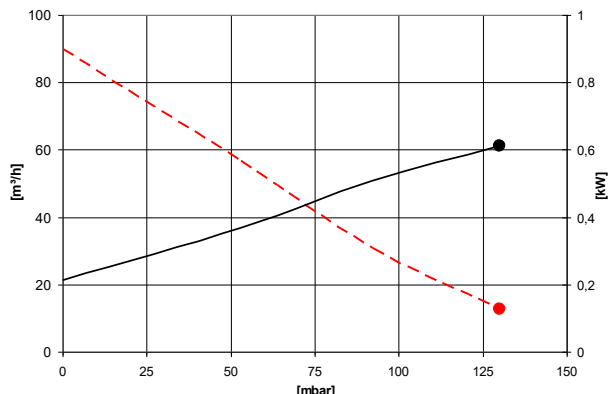

Vacuum @ 60Hz – 460V

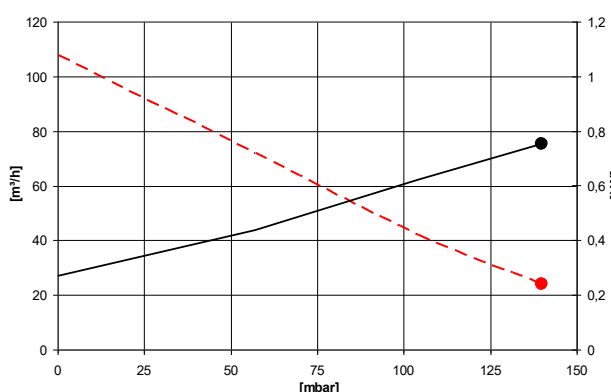

Pressure @ 60Hz – 460V

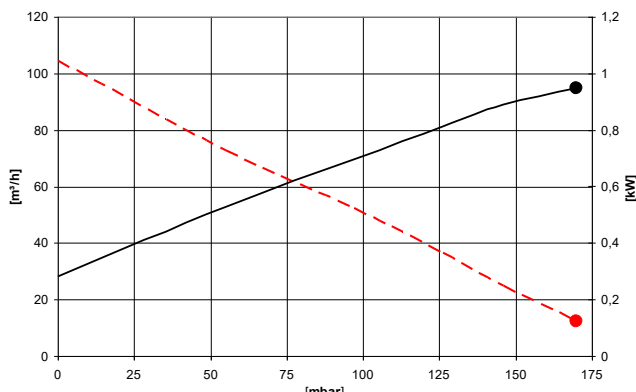


----- Portata / Flow rate


———— Pot. Assorbita / Absorbed Power

Curve riferite alla pressione di 1013mbar (Ass.) e temperatura 20°C (tolleranza ±10%)
Curvas referidas à pressão de 1013mbar (Abs.) e temperatura de 20°C (tolerância ±10%)

ASP - MAND 50Hz

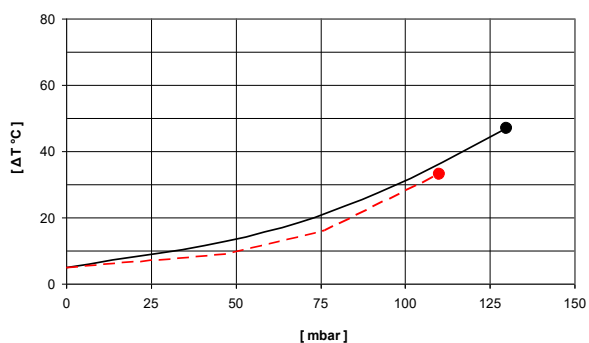

ASP - MAND 60Hz

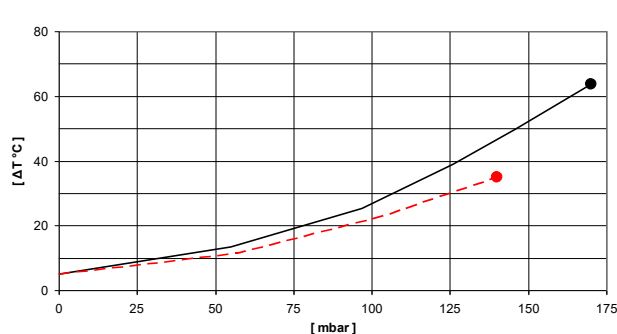

----- Aspirazione / Suction

———— Mandata / Compression

Temperatura ambiente 20°C (tolleranza sulla temperatura ΔT ±5°C)
Temperatura ambiente 20°C (tolerância sobre temperature ΔT ±5°C)