

VNE
VNR

I

Valvole di non ritorno.

Sono costruite in bronzo con le guarnizioni di tenuta in gomma NBR. Possono essere fornite in due versioni: figura A per il montaggio senza vincolo di posizione; figura B per il montaggio esclusivamente in orizzontale. Questa versione priva di molle non genera nessuna perdita di carico è quindi preferibile quando l'applicazione ne consente il montaggio.

P

Válvula de retenção.

As válvulas são feitas de bronze com juntas de borracha NBR. Eles podem ser fornecidos em duas versões: figura A para montagem sem posicionamento; Figura B para montagem exclusivamente na horizontal. Esta versão dimensional não gera qualquer perda de carga é preferível quando a aplicação permite que ela seja montada.

GB

Non- return valves.

These are made of bronze, with gaskets of NBR rubber. They are available in two versions: figure A for mounting in any position; figure B for horizontal mounting only. This no-spring version does not generate any load loss, and is therefore preferable whenever the application allows it to be installed.

E

Válvulas de no retorno.

Están construídas en bronce con las juntas de estanqueidad de goma NBR. Pueden suministrarse en dos versiones: figura A para el montaje sin vínculo de posición; figura B para el montaje exclusivamente en horizontal. Esta versión sin muelle, que no genera ninguna pérdida de carga, es preferible cuando la aplicación permite el montaje.

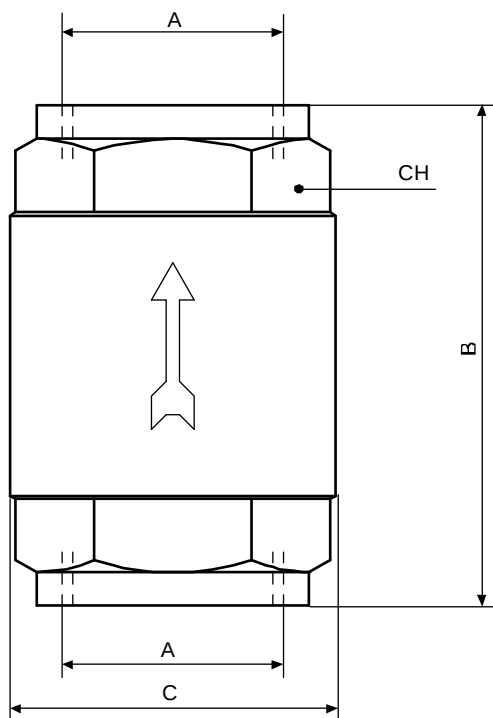


Fig. A

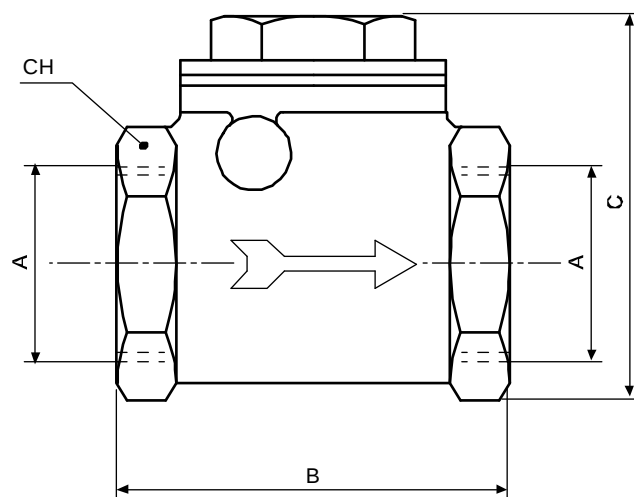


Fig. B

Modello Modelo Model Modelo	Codice Código Code Código	Figura Figura Figure Figura	A	B	C	CH	ΔP mbar
VNE.3/8	9007004	A	3/8"G	60	Ø34	27	20
VNE.1/2	9007005	A	1/2"G	62	Ø34	27	20
VNE.1	9007006	A	1"G	84	Ø52	40	20
VNR.1/2	9007101	B	1/2"G	48	48	25	0
VNR.3/4	9007102	B	3/4"G	53	58	32	0
VNR.1	9007103	B	1"G	63	67	38	0
VNR.1-1/4	9007104	B	1-1/4"G	72	77	50	0
VNR.1-1/2	9007105	B	1-1/2"G	82	88	55	0
VNR.2	9007106	B	2"G	95	101	67	0